

Ex系列-防爆不锈钢防水接头/M

Explosion proof stainless steel cable gland / M

产品材料: 默认304材质, 可选316和316L

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

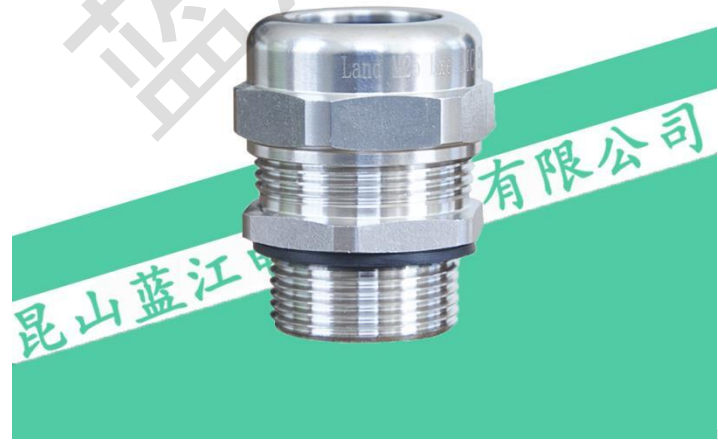

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric system, compliant with GB/T196-1981 standard


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

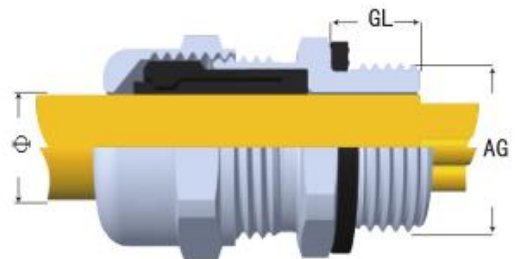

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG6-03-SS	M6×1	6	2~3	6	10/10	100
MG8-04-SS	M8×1	8	3~4	6	12/12	50
MG10-06-SS	M10×1.5(1)	10	3~6	7	14/14	100
MG12S-06-SS	M12×1.5(1)	12	3~6	7	15/14	50
MG12-08-SS	M12×1.5(1)	12	4~8	9	15/17	50
MG12-05-SS	M12×1.5(1)	12	3~5.5	9	15/17	50
MG12-03-SS	M12×1.5(1)	12	1.5~3	9	15/17	50
MG12-6.5-SS	M12×1.5(1)	12	3~6.5	9	15/17	50
MG12-6.7-SS	M12×1.5(1)	12	3~6.7	9	15/17	50
MG14-08-SS	M14×1.5	14	4~8	9	17/17	50
MG14-05-SS	M14×1.5	14	3~5.5	9	17/17	50
MG14-03-SS	M14×1.5	14	1.5~3	9	17/17	50
MG14-6.5-SS	M14×1.5	14	3~6.5	9	17/17	50
MG14-6.7-SS	M14×1.5	14	3~6.7	9	17/17	50
MG16S-08-SS	M16×1.5	16	4~8	9.5	20/17	50
MG16S-05-SS	M16×1.5	16	3~5.5	9.5	20/17	50
MG16S-03-SS	M16×1.5	16	1.5~3	9.5	20/17	50
MG16-10-SS	M16×1.5(1)	16	6~10	9.5	20/21	50
MG16-07-SS	M16×1.5(1)	16	4~7	9.5	20/21	50
MG16-05-SS	M16×1.5(1)	16	3~5	9.5	20/21	50
MG16-04-SS	M16×1.5(1)	16	2~4	9.5	20/21	50
MG18-10-SS	M18×1.5	18	6~10	9.5	21/21	50
MG18-07-SS	M18×1.5	18	4~7	9.5	21/21	50
MG18-05-SS	M18×1.5	18	3~5	9.5	21/21	50
MG18-04-SS	M18×1.5	18	2~4	9.5	21/21	50
MG20-16-SS	M20×1.5	20	11~16	12	24/27	50
MG20-14-SS	M20×1.5	20	8~14	12	24/26	50
MG20-11-SS	M20×1.5	20	7~11	12	24/26	50
MG20-09-SS	M20×1.5	20	5~9	12	24/26	50
MG20-06-SS	M20×1.5	20	3~6.5	12	24/26	50
MG20S-12-SS	M20×1.5	20	7~12	12	24/24	50
MG20S-11-SS	M20×1.5	20	6~11	12	24/24	50
MG20S-09-SS	M20×1.5	20	5~9	12	24/24	50
MG20X-08-SS	M20×1.5	20	4~8	12	24/18	50

MG20X-05-SS	M20×1.5	20	3~5.5	12	24/18	50
MG20X-03-SS	M20×1.5	20	2~3.2	12	24/18	50
MG22-14-SS	M22×1.5	22	8~14	12	26/26	50
MG22-11-SS	M22×1.5	22	7~11	12	26/26	50
MG22-09-SS	M22×1.5	22	5~9	12	26/26	50
MG22-06-SS	M22×1.5	22	3~6.5	12	26/26	50
MG24-14-SS	M24×1.5	24	8~14	10.5	28/26	50
MG24-11-SS	M24×1.5	24	7~11	10.5	28/26	50
MG24-09-SS	M24×1.5	24	5~9	10.5	28/26	50
MG24-06-SS	M24×1.5	24	3~6.5	10.5	28/26	50
MG25-18-SS	M25×1.5	25	13~18	12	30/31	50
MG25-16-SS	M25×1.5	25	12~16	12	30/31	50
MG25-14-SS	M25×1.5	25	8~14	12	30/31	50
MG25-10-SS	M25×1.5	25	6~10	12	30/31	50
MG25-08-SS	M25×1.5	25	4~8	12	30/31	50
MG25-06-SS	M25×1.5	25	3~6	12	30/31	50
MG27-18-SS	M27×1.5(2)	27	13~18	12	30/31	50
MG27-16-SS	M27×1.5(2)	27	11~16	12	30/31	50
MG27-14-SS	M27×1.5(2)	27	8~14	12	30/31	50
MG27-10-SS	M27×1.5(2)	27	6~10	12	30/31	50
MG27-08-SS	M27×1.5(2)	27	4~8	12	30/31	50
MG27-06-SS	M27×1.5(2)	27	3~6	12	30/31	50
MG30-25-SS	M30×1.5(2)	30	18~25	12.5	34/40	50
MG30-22-SS	M30×1.5(2)	30	16~22	12.5	34/40	50
MG30-18-SS	M30×1.5(2)	30	13~18	12.5	34/31	50
MG30-16-SS	M30×1.5(2)	30	11~16	12.5	34/31	50
MG30-14-SS	M30×1.5(2)	30	8~14	12.5	34/31	50
MG30-10-SS	M30×1.5(2)	30	6~10	12.5	34/31	50
MG30-08-SS	M30×1.5(2)	30	4~8	12.5	34/31	50
MG30-06-SS	M30×1.5(2)	30	3~6	12.5	34/31	50
MG32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
MG32-22-SS	M32×1.5	32	16~22	12.5	38/40	20
MG32S-18-SS	M32×1.5	32	13~18	12	38/31	20
MG32S-16-SS	M32×1.5	32	11~16	12	38/31	20
MG32S-14-SS	M32×1.5	32	8~14	12	38/31	20
MG32S-10-SS	M32×1.5	32	6~10	12	38/31	20
MG32S-08-SS	M32×1.5	32	4~8	12	38/31	20
MG32S-06-SS	M32×1.5	32	3~6	12	38/31	20
MG33-25-SS	M33×2.0	33	18~25	14.5	38/40	20

MG33-22-SS	M33×2.0	33	16~22	14.5	38/40	20
MG36-25-SS	M36×1.5(2)	36	18~25	13	42/40	20
MG36-22-SS	M36×1.5(2)	36	16~22	13	42/40	20
MG40-31-SS	M40×1.5(2)	40	25~31	14	48/50	10
MG40-25-SS	M40×1.5(2)	40	18~25	14	48/50	10
MG40S-25-SS	M40×1.5	40	18~25	14	48/40	10
MG40S-22-SS	M40×1.5	40	16~22	14	48/40	10
MG42-31-SS	M42×2.0	42	25~31	15	48/50	10
MG42-25-SS	M42×2.0	42	18~25	15	48/50	10
MG48-31-SS	M48×2.0	48	25~31	15	58/50	10
MG48-25-SS	M48×2.0	48	18~25	15	58/50	10
MG50-41-SS	M50×1.5	50	33~41	15	58/60	10
MG50-33-SS	M50×1.5	50	25~33	15	58/60	10
MG50S-31-SS	M50×1.5	50	25~31	15	58/50	10
MG50S-25-SS	M50×1.5	50	18~25	15	58/50	10
MG60-54-SS	M60×2.0	60	46~54	15	71/76	10
MG60S-44-SS	M60×2.0	60	36~44	15	71/65	10
MG63-54-SS	M63×1.5	63	46~54	15	71/76	10
MG63-46-SS	M63×1.5	63	38~46	15	71/76	10
MG63-35-SS	M63×1.5	63	28~35	15	71/76	10
MG63S-44-SS	M63×1.5	63	36~44	15	71/65	10
MG64-54-SS	M64×2.0	64	46~54	15	71/76	10
MG64S-44-SS	M64×2.0	64	36~44	15	71/65	10
MG72-66-SS	M72×1.5(2)	72	60~66	15.5	80/85	2
MG72-62-SS	M72×1.5(2)	72	56~62	15.5	80/85	2
MG72-56-SS	M72×1.5(2)	72	50~56	15.5	80/85	2
MG72S-54-SS	M72×1.5(2)	72	46~54	15	80/75	2
MG75-66-SS	M75×1.5(2)	75	60~66	15.5	80/85	2
MG75-62-SS	M75×1.5(2)	75	56~62	15.5	80/85	2
MG75-56-SS	M75×1.5(2)	75	50~56	15.5	80/85	2
MG80-66-SS	M80×2.0	80	60~66	15.5	90/85	1
MG80-62-SS	M80×2.0	80	56~62	15.5	90/85	1
MG80-56-SS	M80×2.0	80	50~56	15.5	90/85	1
MG88-77-SS	M88×2.0	88	70~77	20	95/103	1
MG88-68-SS	M88×2.0	88	60~68	20	95/103	1
MG90-77-SS	M90×1.5(2)	90	70~77	20	95/103	1
MG90-68-SS	M90×1.5(2)	90	60~68	20	95/103	1

Ex系列-防爆不锈钢防水接头/PG

Explosion proof stainless steel cable gland/PG

产品材料: 默认304材质, 可选316和316L

螺纹规格: 德制PG牙, 符合DIN40430标准

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: PG thread, compliant with DIN40430 standard


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

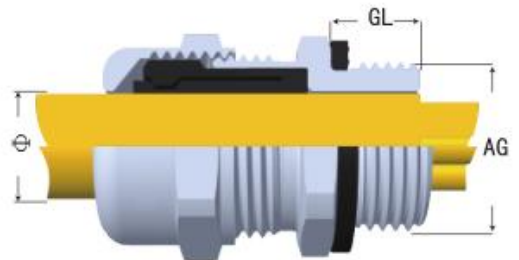

产品参数表/PG

蓝江产品型号	螺纹尺寸	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	AG Φ mm	mm	mm	nut/cap mm	PCS
PG7S-06-SS	PG7	12.5	3~6	9	15/14	50
PG7-08-SS	PG7	12.5	4~8	9	15/17	50
PG7-05-SS	PG7	12.5	3~5.5	9	15/17	50
PG7-03-SS	PG7	12.5	2~3.2	9	15/17	50
PG9-08-SS	PG9	15.2	4~8	9	17/17	50
PG9-05-SS	PG9	15.2	3~5.5	9	17/17	50
PG9-03-SS	PG9	15.2	2~3.2	9	17/17	50
PG11-10-SS	PG11	18.6	6~10	9.5	21/21	50
PG11-07-SS	PG11	18.6	4~7	9.5	21/21	50
PG11-05-SS	PG11	18.6	3~5	9.5	21/21	50
PG11-04-SS	PG11	18.6	2~4	9.5	21/21	50
PG13.5-14-SS	PG13.5	20.4	8~14	10.5	24/26	50
PG13.5-12-SS	PG13.5	20.4	7~12	10.5	24/24	50
PG13.5-11-SS	PG13.5	20.4	6~11	10.5	24/24	50
PG13.5-09-SS	PG13.5	20.4	5~9	10.5	24/24	50
PG16-14-SS	PG16	22.5	8~14	12	26/26	50
PG16-11-SS	PG16	22.5	7~11	12	26/26	50
PG16-06-SS	PG16	22.5	3~6.5	12	26/26	50
PG19-14-SS	PG19	23.8	8~14	10.5	28/26	50
PG21-18-SS	PG21	28.3	13~18	12	32/31	50
PG21-16-SS	PG21	28.3	12~16	12	32/31	50
PG21-14-SS	PG21	28.3	8~14	12	32/31	50
PG21-10-SS	PG21	28.3	6~10	12	32/31	50
PG21-08-SS	PG21	28.3	4~8	12	32/31	50
PG21-06-SS	PG21	28.3	3~6	12	32/31	50
PG25-18-SS	PG25	29.8	13~18	12.5	34/31	50
PG29-25-SS	PG29	37	18~25	12.5	40/40	20
PG29-22-SS	PG29	37	17~22	12.5	40/40	20
PG36-31-SS	PG36	47	25~31	15	58/50	10
PG36-25-SS	PG36	47	18~25	15	58/50	10
PG42-41-SS	PG42	54	33~41	15	60/60	10
PG42-33-SS	PG42	54	25~33	15	60/60	10
PG48-44-SS	PG48	59.3	36~44	15	71/65	10
PG48-54-SS	PG48	59.3	44~54	15	71/76	10
PG63-54-SS	PG63	72	47~54	15	76/76	10

Ex系列-防爆不锈钢防水接头/G

Explosion proof stainless steel cable gland/G

产品材料: 304材质, 可选316和316L

螺纹规格: 英制G(PF)牙, 符合GB/T706.1-2000标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

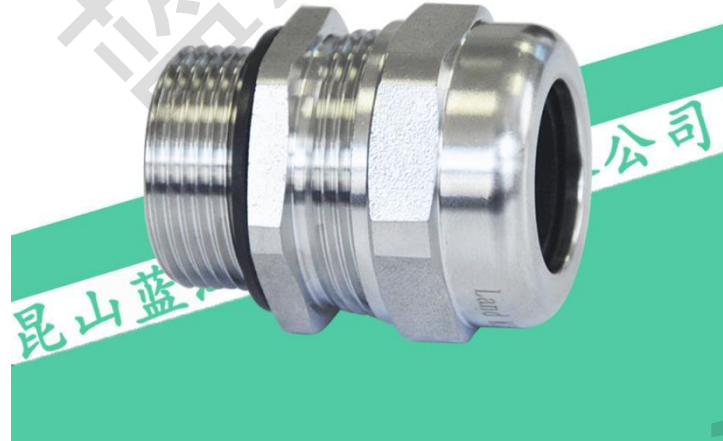

Product materials: SUS304, Optional 316 or 316L

Thread Standard: G (PF) thread, compliant with GB/T706.1-2000 standard


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40°C to 105°C , short-term 120°C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

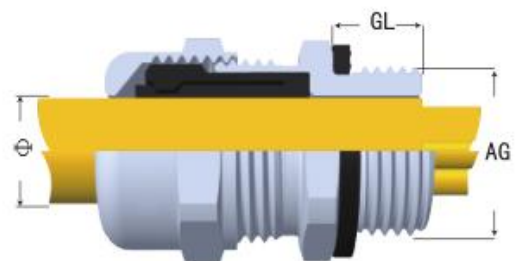

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G (PF)	AG ϕ mm	mm	mm	nut/cap mm	PCS
G1/4-08-SS	G1/4	13.15	4~8	9	17/17	50
G1/4-05-SS	G1/4	13.15	3~5.5	9	17/17	50
G1/4-03-SS	G1/4	13.15	2~3.2	9	17/17	50
G3/8-10-SS	G3/8	16.66	6~10	9.5	21/21	50
G3/8-07-SS	G3/8	16.66	4~7	9.5	21/21	50
G3/8-05-SS	G3/8	16.66	3~5	9.5	21/21	50
G3/8-04-SS	G3/8	16.66	2~4.3	9.5	21/21	50
G1/2-16-SS	G1/2	20.99	11~16	12	24/27	50
G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
G1/2-12-SS	G1/2	20.99	7~12	12	24/24	50
G1/2-11-SS	G1/2	20.99	6~11	12	24/24	50
G1/2-09-SS	G1/2	20.99	5~9	12	24/24	50
G1/2X-08-SS	G1/2	20.99	4~8	12	24/17	50
G1/2X-05-SS	G1/2	20.99	3~5	12	24/17	50
G1/2X-03-SS	G1/2	20.99	2~3	12	24/17	50
G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
G3/4-16-SS	G3/4	26.44	12~16	12	30/31	50
G3/4-14-SS	G3/4	26.44	8~14	12	30/31	50
G3/4-10-SS	G3/4	26.44	6~10	12	30/31	50
G3/4-08-SS	G3/4	26.44	4~8	12	30/31	50
G3/4-06-SS	G3/4	26.44	3~6	12	30/31	50
G1-25-SS	G1	33.25	18~25	15	38/40	20
G1-22-SS	G1	33.25	17~22	15	38/40	20
G1-1/4-31-SS	G1-1/4	41.91	25~31	15	48/50	10
G1-1/4-25-SS	G1-1/4	41.91	18~25	15	48/50	10
G1-1/2-31-SS	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-25-SS	G1-1/2	47.8	18~25	15	55/50	10
G1-1/2-41-SS	G1-1/2	47.8	33~41	15	55/60	10
G1-1/2-33-SS	G1-1/2	47.8	25~33	15	55/60	10
G2-44-SS	G2	59.61	36~44	15	71/65	1
G2-54-SS	G2	59.61	47~54	15	71/76	1
G2-46-SS	G2	59.61	40~46	15	71/76	1
G2-35-SS	G2	59.61	28~35	15	71/76	1
G2-1/2-66-SS	G2-1/2	75.18	60~66	15.5	80/85	1
G3-77-SS	G3	87.88	70~77	20	95/103	1

Ex系列-防爆不锈钢防水接头/NPT

Explosion proof stainless steel cable gland/NPT

产品材料: 304材质, 可选316和316L

螺纹规格: 美制NPT牙, 符合GB/T706.1-2000标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

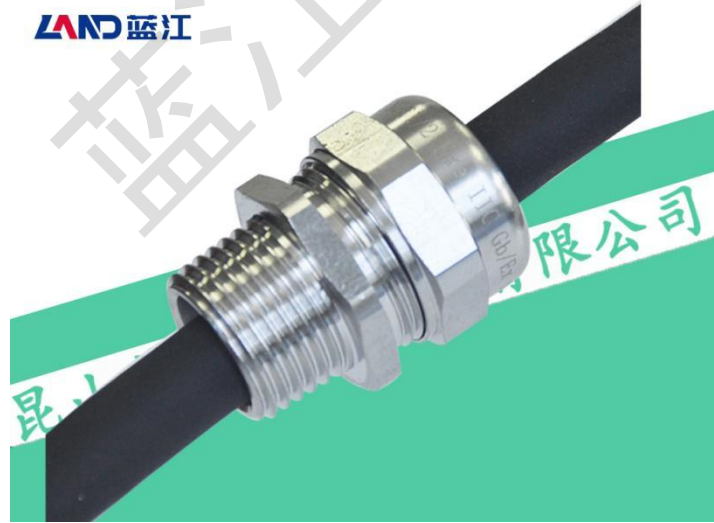

Product materials: SUS304, Optional 316 or 316L

Thread Standard: NPT thread, compliant with GB/T706.1-2000 standard


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40°C to 105°C , short-term 120°C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

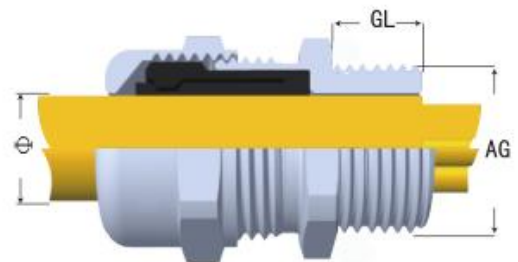

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	NPT	AG Φ mm	mm	mm	nut/cap mm	PCS
NPT1/4-08-SS	NPT1/4	13.15	4~8	9	17	50
NPT1/4-05-SS	NPT1/4	13.15	3~5.5	9	17	50
NPT1/4-03-SS	NPT1/4	13.15	2~3.2	9	17	50
NPT3/8-10-SS	NPT3/8	17.05	6~10	10	21	50
NPT3/8-07-SS	NPT3/8	17.05	4~7	10	21	50
NPT3/8-05-SS	NPT3/8	17.05	3~5	10	21	50
NPT3/8-04-SS	NPT3/8	17.05	2~4.3	10	21	50
NPT1/2-16-SS	NPT1/2	20.99	11~16	13	27	50
NPT1/2-14-SS	NPT1/2	20.99	8~14	13	26	50
NPT1/2-12-SS	NPT1/2	20.99	7~12	11	24	50
NPT1/2-11-SS	NPT1/2	20.99	6~11	11	24	50
NPT1/2-09-SS	NPT1/2	20.99	5~9	11	24	50
NPT1/2X-08-SS	NPT1/2	20.99	4~8	12	17	50
NPT1/2X-05-SS	NPT1/2	20.99	3~5	12	17	50
NPT1/2X-03-SS	NPT1/2	20.99	2~3	12	17	50
NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
NPT3/4-16-SS	NPT3/4	26.56	12~16	13	31	50
NPT3/4-14-SS	NPT3/4	26.56	8~14	13	31	50
NPT3/4-10-SS	NPT3/4	26.56	6~10	13	31	50
NPT3/4-08-SS	NPT3/4	26.56	4~8	13	31	50
NPT3/4-06-SS	NPT3/4	26.56	3~6	13	31	50
NPT1-25-SS	NPT1	33.23	18~25	15	40	20
NPT1-22-SS	NPT1	33.23	17~22	15	40	20
NPT1-1/4-31-SS	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/4-25-SS	NPT1-1/4	41.98	18~25	15	50	10
NPT1-1/2-31-SS	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-25-SS	NPT1-1/2	48.05	18~25	15	50	10
NPT1-1/2-41-SS	NPT1-1/2	48.05	33~41	15	60	10
NPT1-1/2-33-SS	NPT1-1/2	48.05	25~33	15	60	10
NPT2-44-SS	NPT2	60.09	36~44	15	65	10
NPT2-54-SS	NPT2	60.09	44~54	15	76	10
NPT2-46-SS	NPT2	60.09	38~46	15	76	10
NPT2-35-SS	NPT2	60.09	28~35	15	76	10
NPT2-1/2-66-SS	NPT2-1/2	75.18	60~66	15.5	85	1
NPT3-77-SS	NPT3	87.88	70~77	20	103	1

长牙防爆不锈钢防水接头

Long thread Ex stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

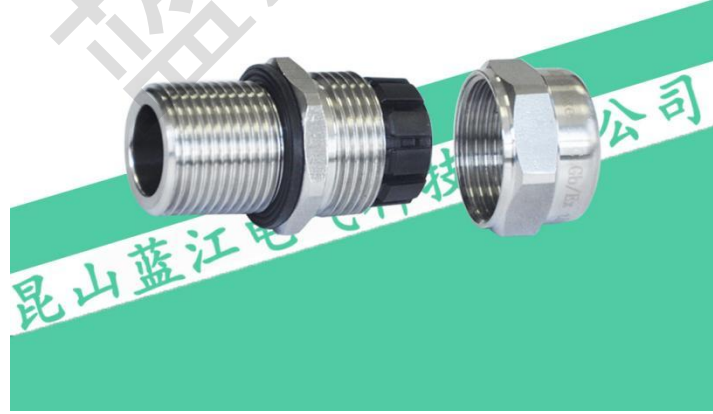

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric system, compliant with GB/T196-1981 standard


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40°C to 105°C , short-term 120°C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

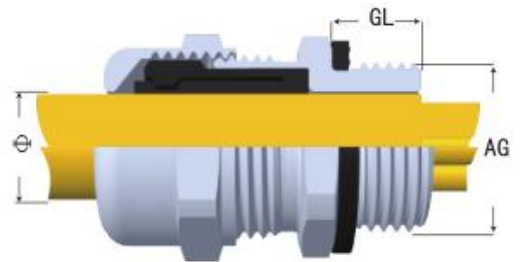

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG10-06-SS-L15	M10×1.5(1)	10	3~6	15	14/14	100
MG10-06-SS-L20	M10×1.5(1)	10	3~6	20	14/14	100
MG12-08-SS-L15	M12×1.5	12	4~8	15	15/17	50
MG12-08-SS-L20	M12×1.5	12	4~8	20	15/17	50
MG16-10-SS-L15	M16×1.5	16	6~10	15	20/21	50
MG16-10-SS-L20	M16×1.5	16	6~10	20	20/21	50
MG18-10-SS-L15	M18×1.5	18	6~10	15	21/21	50
MG18-10-SS-L20	M18×1.5	18	6~10	20	21/21	50
MG20-16-SS-L15	M20×1.5	20	11~16	15	24/27	50
MG20-16-SS-L20	M20×1.5	20	11~16	20	24/27	50
MG20-14-SS-L15	M20×1.5	20	8~14	15	24/26	50
MG20-14-SS-L20	M20×1.5	20	8~14	20	24/26	50
MG20S-12-SS-L15	M20×1.5	20	7~12	15	24/24	50
MG20S-12-SS-L20	M20×1.5	20	7~12	20	24/24	50
MG20S-09-SS-L15	M20×1.5	20	5~9	15	24/24	50
MG20S-09-SS-L20	M20×1.5	20	5~9	20	24/24	50
MG22-14-SS-L15	M22×1.5	22	8~14	15	26/26	50
MG22-14-SS-L20	M22×1.5	22	8~14	20	26/26	50
MG24-14-SS-L15	M24×1.5	24	8~14	15	28/26	50
MG24-14-SS-L20	M24×1.5	24	8~14	20	28/26	50
MG25-18-SS-L15	M25×1.5	25	13~18	15	30/31	50
MG25-18-SS-L20	M25×1.5	25	13~18	20	30/31	50
MG27-18-SS-L17	M27×1.5(2)	27	13~18	17	30/31	50
MG27-18-SS-L20	M27×1.5(2)	27	13~18	20	30/31	50
MG30-18-SS-L15	M30×1.5(2)	30	13~18	15	34/31	50
MG30-18-SS-L20	M30×1.5(2)	30	13~18	20	34/31	50
MG32-25-SS-L15	M32×1.5	32	18~25	15	38/40	20
MG32-25-SS-L20	M32×1.5	32	18~25	20	38/40	20
MG40-31-SS-L20	M40×1.5	40	25~31	20	48/50	10
MG42-31-SS-L20	M42×2.0	42	25~31	20	48/50	10
MG48-31-SS-L20	M48×2.0	48	25~31	20	58/50	10
MG50-41-SS-L20	M50×1.5	50	33~41	20	58/60	10
MG60-44-SS-L20	M60×2.0	60	36~44	20	71/65	10
MG63-44-SS-L20	M63×1.5	63	36~44	20	71/65	10
MG63-54-SS-L20	M63×1.5	63	46~54	20	71/76	10

NGW系列-大型不锈钢防水接头

NGW Series - Large Stainless Steel Cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: -20°C~200°C, 短时可达220°C

设计特点: 车铣一体成型, 产品密度高, 抗冲击力强

应用场景: 电气, 船舶, 电机, 大型机械设备, 交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

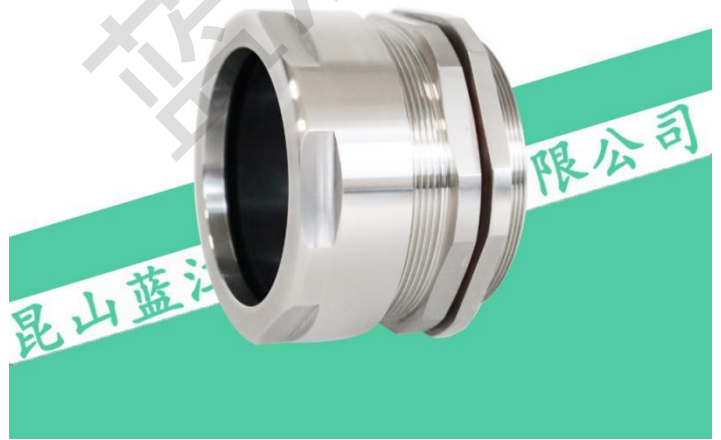

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric system, compliant with GB/T196-1981 standard

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -20 ° C to 200 ° C, short-term 220 ° C



Design Features: Milling integrated molding, high product density, strong impact resistance

Application:Electrical, marine, electric motors, large machinery, transportation, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

LAND 蓝江

LAND 蓝江

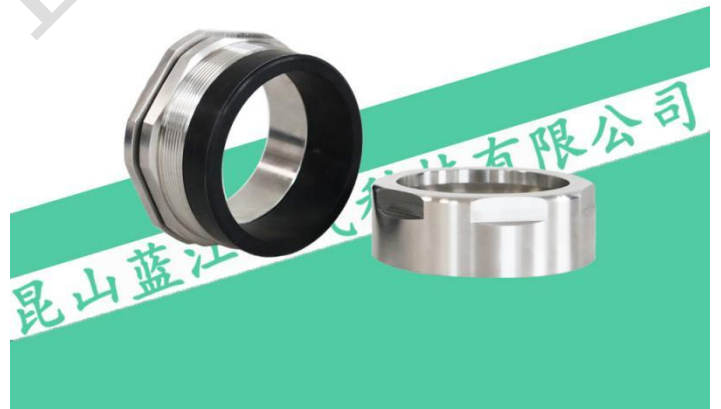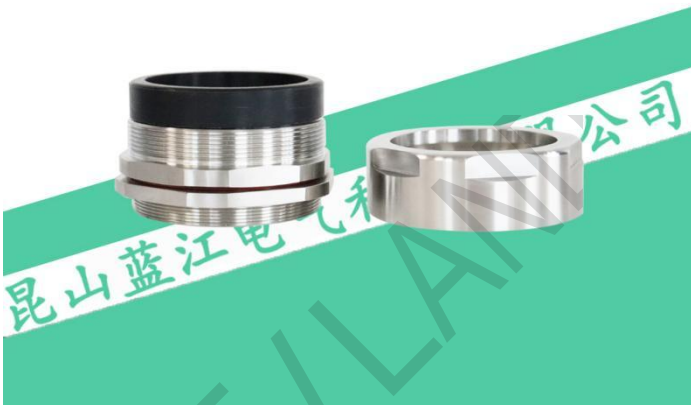

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装数量
Product model	Thread size	Hole size	Cable range	Thread length	quantity
PN.	M牙	AG φ mm	mm	mm	PCS
NGW-M50-43-SS	M50×1.5	50	35-43	15	1
NGW-M60-44-SS	M60×2.0	60	35-44	15	1
NGW-M63-44-SS	M63×1.5	63	35-44	15	1
NGW-M63-54-SS	M63×1.5	63	44-54	15	1
NGW-M64-44-SS	M64×2.0	64	35-44	15	1
NGW-M64-54-SS	M64×2.0	64	44-54	15	1
NGW-M72-54-SS	M72×1.5(2)	72	44-54	17	1
NGW-M72-60-SS	M72×1.5(2)	72	53-60	17	1
NGW-M75-54-SS	M75×1.5(2)	75	44-54	17	1
NGW-M75-60-SS	M75×1.5(2)	75	53-60	17	1
NGW-M75-68-SS	M75×1.5(2)	75	60-68	17	1
NGW-M80-60-SS	M80×2.0	80	53-60	18	1
NGW-M80-68-SS	M80×2.0	80	60-68	18	1
NGW-M88-61-SS	M88×2.0	88	52-61	18	1
NGW-M88-68-SS	M88×2.0	88	60-68	18	1
NGW-M88-77-SS	M88×2.0	88	68-77	18	1
NGW-M90-61-SS	M90×1.5(2)	90	52-61	18	1
NGW-M90-68-SS	M90×1.5(2)	90	60-68	18	1
NGW-M90-77-SS	M90×1.5(2)	90	68-77	18	1
NGW-M100-77-SS	M100×2.0	100	68-77	20	1
NGW-M100-90-SS	M100×2.0	100	80-90	20	1
NGW-M105-90-SS	M105×2.0	105	80-90	20	1
NGW-M110-90-SS	M110×2.0	110	80-90	20	1
NGW-M115-90-SS	M115×2.0	115	80-90	20	1
NGW-M115-104-SS	M120×2.0	115	95-104	20	1
NGW-M120-90-SS	M120×2.0	120	80-90	20	1
NGW-M120-104-SS	M120×2.0	120	95-104	20	1
NGW-M125-104-SS	M125×2.0	125	95-104	20	1
NGW-M130-104-SS	M130×2.0	130	95-104	20	1
NGW-M130-113-SS	M130×2.0	130	103-113	20	1
NGW-M140-113-SS	M140×2.0	140	103-113	20	1
NGW-M150-113-SS	M150×2.0	150	103-113	20	1

扁孔型不锈钢电缆防水接头

Flat hole stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙



产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 扁形密封圈分体设计, 防护等级高, 抗拉力强, 适用于各类扁电缆线及伴热带锁紧密封

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通等

订购说明: 默认不附螺母, 如需316及316L请另外说明

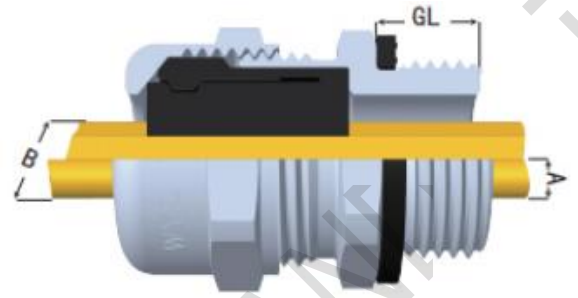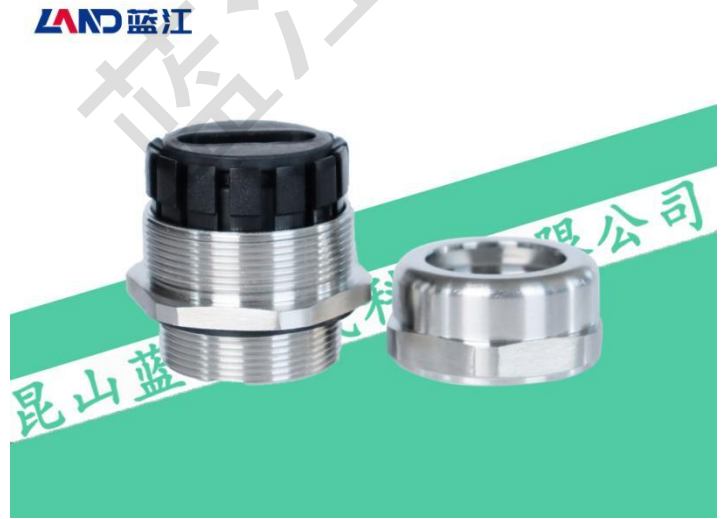

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Flat sealing ring split design, high protection level, strong tensile strength, suitable for locking and sealing of various flat cables and heat tracing belts

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG20S-0508-SS	M20×1.5	20	5*8	12	24/24	50
MG20S-0712-SS	M20×1.5	20	7*12	12	24/24	50
MG20-0410-SS	M20×1.5	20	4*10	12	24/26	50
MG20-0814-SS	M20×1.5	20	8*14	12	24/26	50
MG22-0410-SS	M22×1.5	22	4*10	12	26/26	50
MG22-0814-SS	M22×1.5	22	8*14	12	26/26	50
MG24-0410-SS	M24×1.5	24	4*10	10.5	28/26	50
MG24-0814-SS	M24×1.5	24	8*14	10.5	28/26	50
MG25-0614-SS	M25×1.5	25	7*14	12	30/31	50
MG27-0614-SS	M27×1.5(2)	27	7*14	12	30/31	50
MG30-0614-SS	M30×1.5(2)	30	7*14	12.5	34/31	50
MG30-0519-SS	M30×1.5(2)	30	5*19	12.5	34/41	50
MG32S-0714-SS	M32×1.5	32	7*14	12	38/31	50
MG32-0519-SS	M32×1.5	32	5*19	12.5	38/40	20
MG36-0519-SS	M36×1.5(2)	36	5*19	13	42/40	20
MG40S-0519-SS	M40×1.5	40	5*19	14	48/40	10
MG40-1230-SS	M40×1.5	40	12*30	14	48/50	10
MG42-1230-SS	M42×2.0	42	12*30	15	48/50	10
MG48-1230-SS	M48×2.0	48	12*30	15	58/50	10
MG50S-1230-SS	M50×1.5	50	12*30	15	58/50	10
MG50-1334-SS	M50×1.5	50	13*34	15	58/60	10
MG63S-1641-SS	M63×1.5	63	16*41	15	71/65	10
MG63S-2044-SS	M63×1.5	63	20*44	15	71/76	10
MG63-2055-SS	M63×1.5	63	20*55	15	71/76	10
MG72-2055-SS	M72×2.0	72	20*55	15	80/75	2

·产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG13.5-0508-SS	PG13.5	20.4	5*8	10	24/24	50
PG13.5-0712-SS	PG13.5	20.4	7*12	10	24/24	50
PG16-0410-SS	PG16	22.5	4*10	11	26/26	50
PG16-0814-SS	PG16	22.5	8*14	11	26/26	50
PG21-0614-SS	PG21	28.3	7*14	12	32/31	50
PG29-0519-SS	PG29	37	5*19	12	40/40	20
PG36-1230-SS	PG36	47	12*30	15	58/50	10
PG42-1334-SS	PG42	54	13*34	15.5	60/60	10
PG48-1641-SS	PG48	59.3	16*41	15	71/65	10
PG48-2044-SS	PG48	59.3	20*44	15	71/65	10
PG48-2055-SS	PG48	59.3	20*55	15	71/76	10
G1/2-0508-SS	G1/2	20.95	5*8	12	24/24	50
G1/2-0712-SS	G1/2	20.95	7*12	12	24/24	50
G1/2D-0410-SS	G1/2	20.95	4*10	12	24/26	50
G1/2D-0814-SS	G1/2	20.95	8*14	12	24/26	50
G3/4-0614-SS	G3/4	26.44	7*14	12	30/31	50
G1-0519-SS	G1	33.2	5*19	15	38/40	20
G1-1/4-1230-SS	G1-1/4	41.9	12*30	15	48/50	10
G1-1/2-1230-SS	G1-1/2	47.8	12*30	15	55/50	10
G1-1/2-1334-SS	G1-1/2	47.8	13*34	15	55/60	10
G2-1641-SS	G2	59.6	16*41	15	71/65	10
G2-2044-SS	G2	59.6	20*44	15	71/65	10
G2-2055-SS	G2	59.6	20*55	15	71/76	10
NPT1/2-0508-SS	NPT1/2	20.95	5*8	13	24	50
NPT1/2-0712-SS	NPT1/2	20.95	7*12	13	24	50
NPT1/2D-0410-SS	NPT1/2	20.95	4*10	13	26	50
NPT1/2D-0814-SS	NPT1/2	20.95	8*14	13	26	50
NPT3/4-0614-SS	NPT3/4	26.44	7*14	13	31	50
NPT1-0519-SS	NPT1	33.2	5*19	15	40	20
NPT1-1/4-1230-SS	NPT1-1/4	41.9	12*30	15	50	10
NPT1-1/2-1230-SS	NPT1-1/2	47.8	12*30	15	50	10
NPT1-1/2-1334-SS	NPT1-1/2	47.8	13*34	15	60	10
NPT2-1641-SS	NPT2	59.6	16*41	15	65	10
NPT2-2044-SS	NPT2	59.6	20*44	15	65	10
NPT2-2055-SS	NPT2	59.6	20*55	15	76	10

二孔型不锈钢电缆防水接头

Two holes stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40°C to 105°C , short-term 120°C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

LAND 蓝江

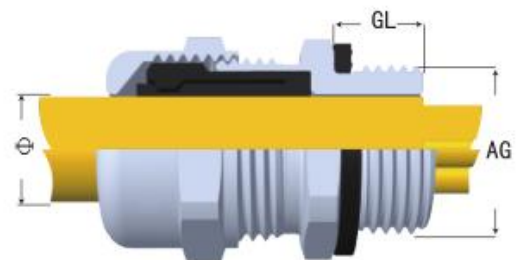

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12-H2-03-SS	M12×1.5	12	1.5~3	9	15/17	50
MG14-H2-03-SS	M14×1.5	14	1.5~3	9	17/17	50
MG16S-H2-03-SS	M16×1.5	16	1.5~3	9.5	20/17	50
MG16-H2-02-SS	M16×1.5	16	1.5~2.6	9.5	20/21	50
MG16-H2-04-SS	M16×1.5	16	2~4	9.5	20/21	50
MG18-H2-04-SS	M18×1.5	18	2~4	9.5	21/21	50
MG20S-H2-05-SS	M20×1.5	20	2~5	12	24/24	50
MG20-H2-03-SS	M20×1.5	20	1.5~3	12	24/26	50
MG20-H2-04-SS	M20×1.5	20	2~4	12	24/26	50
MG20-H2-05-SS	M20×1.5	20	2~5	12	24/26	50
MG20-H2-06-SS	M20×1.5	20	3~6	12	24/26	50
MG20-H2-07-SS	M20×1.5	20	4~7	12	24/26	50
MG22-H2-06-SS	M22×1.5	22	3~6	12	26/26	50
MG24-H2-06-SS	M24×1.5	24	3~6	10.5	28/26	50
MG25-H2-05-SS	M25×1.5	25	3~5	12	30/31	50
MG25-H2-06-SS	M25×1.5	25	3~6	12	30/31	50
MG25-H2-08-SS	M25×1.5	25	5~8	12	30/31	50
MG25-H2-09-SS	M25×1.5	25	6~9	12	30/31	50
MG27-H2-08-SS	M27×1.5 (2)	27	5~8	12	30/31	50
MG30-H2-08-SS	M30×1.5 (2)	30	5~8	12.5	34/31	50
MG30-H2-10-SS	M30×1.5 (2)	30	6~10	12.5	34/41	20
MG30-H2-12-SS	M30×1.5 (2)	30	9~12	12.5	34/41	20
MG32S-H2-08-SS	M32×1.5	32	5~8	12	38/31	20
MG32-H2-10-SS	M32×1.5	32	6~10	12.5	38/40	20
MG32-H2-12-SS	M32×1.5	32	9~12	12.5	38/40	20
MG36-H2-10-SS	M36×1.5 (2)	36	6~10	13	42/40	20
MG40S-H2-10-SS	M40×1.5	40	6~10	14	48/40	10
MG40S-H2-12-SS	M40×1.5	40	9~12	14	48/40	10
MG40-H2-13-SS	M40×1.5	40	10~13	14	48/50	10
MG42-H2-13-SS	M42×2.0	42	10~13	15	48/50	10
MG48-H2-13-SS	M48×2.0	48	10~13	15	58/50	10
MG50S-H2-13-SS	M50×1.5	50	10~13	15	58/50	10
MG50-H2-15-SS	M50×1.5	50	11~15	15	58/60	10
MG63-H2-17-SS	M63×1.5	63	14~17	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG7-H2-03-SS	PG7	12.5	1.5~3	8.5	15/17	50
PG9-H2-03-SS	PG9	15.2	1.5~3	8.5	17/17	50
PG11-H2-02-SS	PG11	18.6	1.5~2.6	10	21/21	50
PG11-H2-04-SS	PG11	18.6	2~4	10	21/21	50
PG13.5-H2-05-SS	PG13.5	20.4	2~5	10	24/24	50
PG13.5-H2-03-SS	PG13.5	20.4	1.5~3	10	24/26	50
PG13.5-H2-04-SS	PG13.5	20.4	2~4	10	24/26	50
PG13.5-H2-05-SS	PG13.5	20.4	2~5	10	24/26	50
PG13.5-H2-06-SS	PG13.5	20.4	3~6	10	24/26	50
PG13.5-H2-07-SS	PG13.5	20.4	4~7	10	24/26	50
PG16-H2-03-SS	PG16	22.5	1.5~3	11	26/26	50
PG16-H2-04-SS	PG16	22.5	2~4	11	26/26	50
PG16-H2-05-SS	PG16	22.5	2~5	11	26/26	50
PG16-H2-06-SS	PG16	22.5	3~6	11	26/26	50
PG16-H2-07-SS	PG16	22.5	4~7	11	26/26	50
PG19-H2-03-SS	PG19	23.8	1.5~3	10.5	28/26	50
PG19-H2-04-SS	PG19	23.8	2~4	10.5	28/26	50
PG19-H2-05-SS	PG19	23.8	2~5	10.5	28/26	50
PG19-H2-06-SS	PG19	23.8	3~6	10.5	28/26	50
PG19-H2-07-SS	PG19	23.8	4~7	10.5	28/26	50
PG21-H2-05-SS	PG21	28.3	2~5	12	32/31	50
PG21-H2-06-SS	PG21	28.3	3~6	12	32/31	50
PG21-H2-08-SS	PG21	28.3	5~8	12	32/31	50
PG21-H2-09-SS	PG21	28.3	6~9	12	32/31	50
PG25-H2-05-SS	PG25	29.8	2~5	12.5	34/31	50
PG25-H2-06-SS	PG25	29.8	3~6	12.5	34/31	50
PG25-H2-08-SS	PG25	29.8	5~8	12.5	34/31	50
PG25-H2-09-SS	PG25	29.8	6~9	12.5	34/31	50
PG29-H2-10-SS	PG29	37	6~10	12	40/40	20
PG29-H2-12-SS	PG29	37	9~12	12	40/40	20
PG36-H2-13-SS	PG36	47	9~13	15	58/50	10
PG42-H2-15-SS	PG42	54	11~15	15.5	60/60	10
PG48-H2-17-SS	PG48	59.3	14~17	16	71/65	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4-H2-03-SS	G1/4	13.15	1.5~3	9	17/17	50
G3/8-H2-02-SS	G3/8	16.66	1.5~2.6	9.5	21/21	50
G3/8-H2-04-SS	G3/8	16.66	2~4	9.5	21/21	50
G1/2-H2-05-SS	G1/2	20.95	2~5	12	24/24	50
G1/2D-H2-03-SS	G1/2	20.95	1.5~3	12	24/26	50
G1/2D-H2-04-SS	G1/2	20.95	2~4	12	24/26	50
G1/2D-H2-05-SS	G1/2	20.95	2~5	12	24/26	50
G1/2D-H2-06-SS	G1/2	20.95	3~6	12	24/26	50
G3/4-H2-05-SS	G3/4	26.44	3~5	12	30/31	50
G3/4-H2-06-SS	G3/4	26.44	3~6	12	30/31	50
G3/4-H2-08-SS	G3/4	26.44	5~8	12	30/31	50
G1-H2-10-SS	G1	33.2	6~10	15	38/40	20
G1-H2-12-SS	G1	33.2	8~12	15	38/40	20
G1-1/4-H2-13-SS	G1-1/4	41.9	9~13	15	48/50	10
G1-1/2-H2-13-SS	G1-1/2	47.8	9~13	15	55/50	10
G1-1/2-H2-15-SS	G1-1/2	47.8	11~15	15	55/60	10
G2-H2-17-SS	G2	59.6	14~17	15	71/76	10
NPT1/4-H2-03-SS	NPT1/4	13.15	1.5~3	9	17	50
NPT3/8-H2-02-SS	NPT3/8	16.66	1.5~2.6	10	21	50
NPT3/8-H2-04-SS	NPT3/8	16.66	2~4	10	21	50
NPT1/2-H2-05-SS	NPT1/2	20.95	2~5	13	24	50
NPT1/2D-H2-03-SS	NPT1/2	20.95	1.5~3	13	26	50
NPT1/2D-H2-04-SS	NPT1/2	20.95	2~4	13	26	50
NPT1/2D-H2-05-SS	NPT1/2	20.95	2~5	13	26	50
NPT1/2D-H2-06-SS	NPT1/2	20.95	3~6	13	26	50
NPT3/4-H2-05-SS	NPT3/4	26.44	3~5.5	13	31	50
NPT3/4-H2-06-SS	NPT3/4	26.44	3~6	13	31	50
NPT3/4-H2-08-SS	NPT3/4	26.44	5~8	13	31	50
NPT1-H2-10-SS	NPT1	33.2	6~10	15	40	20
NPT1-H2-12-SS	NPT1	33.2	8~12	15	40	20
NPT1-1/4-H2-13-SS	NPT1-1/4	41.9	9~13	15	50	10
NPT1-1/2-H2-13-SS	NPT1-1/2	47.8	9~13	15	50	10
NPT1-1/2-H2-15-SS	NPT1-1/2	47.8	11~15	15	60	10
NPT2-H2-17-SS	NPT2	59.6	14~17	15	76	10

三孔型不锈钢电缆防水接头

Three holes stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP68、UL94V-2

温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

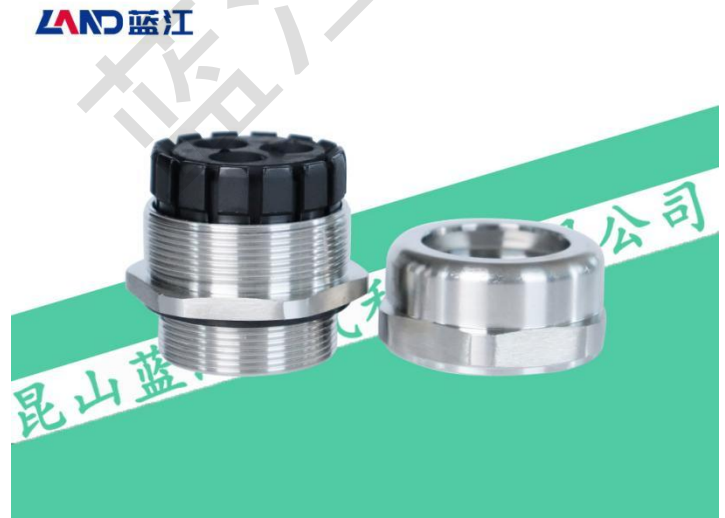

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40°C to 105°C , short-term 120°C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-H3-02-SS	M12×1.5	12	1~2.6	9	15/17	50
MG14-H3-02-SS	M14×1.5	14	1~2.6	9	17/17	50
MG16S-H3-02-SS	M16×1.5	16	1~2.6	9.5	20/17	50
MG16-H3-03-SS	M16×1.5	16	1.5~3	9.5	20/21	50
MG16-H3-04-SS	M16×1.5	16	2~4	9.5	20/21	50
MG18-H3-04-SS	M18×1.5	18	2~4	9.5	21/21	50
MG20S-H3-05-SS	M20×1.5	20	2~5	12	24/24	50
MG20-H3-03-SS	M20×1.5	20	1.5~3	12	24/26	50
MG20-H3-05-SS	M20×1.5	20	2~5	12	24/26	50
MG20-H3-06-SS	M20×1.5	20	3~6	12	24/26	50
MG22-H3-05-SS	M22×1.5	22	2~5	12	26/26	50
MG22-H3-06-SS	M22×1.5	22	3~6	12	26/26	50
MG24-H3-05-SS	M24×1.5	24	2~5	10.5	28/26	50
MG24-H3-06-SS	M24×1.5	24	3~6	10.5	28/26	50
MG25-H3-05-SS	M25×1.5	25	2~5	12	30/31	50
MG25-H3-06-SS	M25×1.5	25	3~6	12	30/31	50
MG25-H3-07-SS	M25×1.5	25	4~7	12	30/31	50
MG25-H3-08-SS	M25×1.5	25	5~8	12	30/31	50
MG27-H3-08-SS	M27×1.5(2)	27	5~8	12	30/31	50
MG30-H3-08-SS	M30×1.5(2)	30	5~8	12.5	34/31	50
MG30-H3-10-SS	M30×1.5(2)	30	6~10	12.5	34/40	50
MG32S-H3-08-SS	M32×1.5	32	5~8	12.5	38/31	20
MG32-H3-10-SS	M32×1.5	32	6~10	12.5	38/40	20
MG36-H3-10-SS	M36×1.5(2)	36	6~10	13	42/40	20
MG40S-H3-10-SS	M40×1.5	40	6~10	14	48/40	10
MG40-H3-11-SS	M40×1.5	40	8~11	14	48/50	10
MG40-H3-13-SS	M40×1.5	40	10~13	14	48/50	10
MG40-H3-14-SS	M40×1.5	40	11~14	14	48/50	10
MG42-H3-13-SS	M42×2.0	42	10~13	15	48/50	10
MG42-H3-14-SS	M42×2.0	42	11~14	15	48/50	10
MG48-H3-13-SS	M48×2.0	48	10~13	15	58/50	10
MG48-H3-14-SS	M48×2.0	48	11~14	15	58/50	10
MG50-H3-12-SS	M50×1.5	50	9~12	15	58/60	10
MG63-H3-13-SS	M63×1.5	63	9~13	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
PG7-H3-02-SS	PG7	12.5	1~2.6	9	15/17	50
PG9-H3-02-SS	PG9	15.2	1~2.6	9	17/17	50
PG11-H3-03-SS	PG11	18.6	1.5~3	9.5	21/21	50
PG11-H3-04-SS	PG11	18.6	2~4	9.5	21/21	50
PG13.5-H3-05-SS	PG13.5	20.4	2~5	10.5	24/24	50
PG13.5-H3-03-SS	PG13.5	20.4	1.5~3	10.5	24/26	50
PG13.5-H3-05-SS	PG13.5	20.4	2~5	10.5	24/26	50
PG13.5-H3-06-SS	PG13.5	20.4	3~6	10.5	24/26	50
PG16-H3-03-SS	PG16	28.3	1.5~3	12	26/26	50
PG16-H3-05-SS	PG16	22.5	2~5	12	26/26	50
PG16-H3-06-SS	PG16	22.5	3~6	12	26/26	50
PG19-H3-03-SS	PG19	23.8	1.5~3	10.5	28/26	50
PG19-H3-05-SS	PG19	23.8	2~5	10.5	28/26	50
PG19-H3-06-SS	PG19	23.8	3~6	10.5	28/26	50
PG21-H3-05-SS	PG21	28.3	2~5	12	32/31	50
PG21-H3-06-SS	PG21	28.3	3~6	12	32/31	50
PG21-H3-07-SS	PG21	28.3	4~7	12	32/31	50
PG21-H3-08-SS	PG21	28.3	5~8	12	32/31	50
PG25-H3-05-SS	PG25	29.8	2~5	12.5	34/31	50
PG25-H3-06-SS	PG25	29.8	3~6	12.5	34/31	50
PG25-H3-07-SS	PG25	29.8	4~7	12.5	34/31	50
PG25-H3-08-SS	PG25	29.8	5~8	12.5	34/31	50
PG29-H3-10-SS	PG29	37	6~10	12.5	40/40	20
PG36-H3-11-SS	PG36	47	8~11	15	58/50	10
PG36-H3-13-SS	PG36	47	10~13	15	58/50	10
PG36-H3-14-SS	PG36	47	11~14	15	58/50	10
PG42-H3-12-SS	PG42	54	9~12	15	60/60	10
PG48-H3-13-SS	PG48	59.3	9~13	16	71/65	10

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4-H3-02-SS	G1/4	13.15	1~2.6	9	17/17	50
G3/8-H3-04-SS	G3/8	16.66	2~4	9.5	21/21	50
G1/2-H3-05-SS	G1/2	20.95	2~5	12	24/24	50
G1/2D-H3-03-SS	G1/2	20.95	1.5~3	12	24/26	50
G1/2D-H3-06-SS	G1/2	20.95	3~6	12	24/26	50
G3/4-H3-05-SS	G3/4	26.44	2~5	12	30/31	50
G3/4-H3-06-SS	G3/4	26.44	3~6	12	30/31	50
G3/4-H3-07-SS	G3/4	26.44	4~7	12	30/31	50
G3/4-H3-08-SS	G3/4	26.44	5~8	12	30/31	50
G1-H3-10-SS	G1	33.2	6~10	15	38/40	20
G1-1/4-H3-11-SS	G1-1/4	41.9	8~11	15	48/50	10
G1-1/4-H3-13-SS	G1-1/4	41.9	10~13	15	48/50	10
G1-1/4-H3-14-SS	G1-1/4	41.9	11~14	15	48/50	10
G1-1/2-H3-11-SS	G1-1/2	47.8	8~11	15	55/50	10
G1-1/2-H3-13-SS	G1-1/2	47.8	10~13	15	55/50	10
G1-1/2-H3-14-SS	G1-1/2	47.8	11~14	15	55/50	10
G2-H3-13	G2	59.6	9~13	15	71/76	10
NPT1/4-H3-02-SS	NPT1/4	13.15	1~2.6	9	17	50
NPT3/8-H3-04-SS	NPT3/8	16.66	2~4	10	21	50
NPT1/2-H3-05-SS	NPT1/2	20.95	2~5	11	24	50
NPT1/2D-H3-03-SS	NPT1/2	20.95	1.5~3	13	26	50
NPT1/2D-H3-06-SS	NPT1/2	20.95	3~6	13	26	50
NPT3/4-H3-05-SS	NPT3/4	26.44	2~5	13	31	50
NPT3/4-H3-06-SS	NPT3/4	26.44	3~6	13	31	50
NPT3/4-H3-07-SS	NPT3/4	26.44	4~7	13	31	50
NPT3/4-H3-08-SS	NPT3/4	26.44	5~8	13	31	50
NPT1-H3-10-SS	NPT1	33.2	6~10	15	40	20
NPT1-1/4-H3-11-SS	NPT1-1/4	41.9	8~11	15	50	10
NPT1-1/4-H3-13-SS	NPT1-1/4	41.9	10~13	15	50	10
NPT1-1/4-H3-14-SS	NPT1-1/4	41.9	11~14	15	50	10
NPT1-1/2-H3-11-SS	NPT1-1/2	47.8	8~11	15	50	10
NPT1-1/2-H3-13-SS	NPT1-1/2	47.8	10~13	15	50	10
NPT1-1/2-H3-14-SS	NPT1-1/2	47.8	11~14	15	50	10
NPT2-H3-13	NPT2	59.6	9~13	15	76	10

四孔型不锈钢电缆防水接头

Four hole stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-H4-02-SS	M12×1.5	12	1~2.3	9	15/17	50
MG14-H4-02-SS	M14×1.5	14	1~2.3	9	17/17	50
MG16S-H4-02-SS	M16×1.5	16	1~2.6	9.5	20/17	50
MG16-H4-03-SS	M16×1.5	16	1.5~3	9.5	20/21	50
MG20S-H4-04-SS	M20×1.5	20	2~4	12	24/24	50
MG20-H4-03-SS	M20×1.5	20	1~2.5	12	24/26	50
MG20-H4-04-SS	M20×1.5	20	1.5~3.5	12	24/26	50
MG20-H4-05-SS	M20×1.5	20	2~4.5	12	24/26	50
MG22-H4-03-SS	M22×1.5	22	1~2.5	12	26/26	50
MG22-H4-04-SS	M22×1.5	22	1.5~3.5	12	26/26	50
MG22-H4-05-SS	M22×1.5	22	2~4.5	12	26/26	50
MG24-H4-03-SS	M24×1.5	24	1~2.5	10.5	28/26	50
MG24-H4-04-SS	M24×1.5	24	1.5~3.5	10.5	28/26	50
MG24-H4-05-SS	M24×1.5	24	2~4.5	10.5	28/26	50
MG25-H4-05-SS	M25×1.5	25	2~5	12	30/31	50
MG25-H4-06-SS	M25×1.5	25	3~6	12	30/31	50
MG25-H4-07-SS	M25×1.5	25	4~7	12	30/31	50
MG25-H4-08-SS	M25×1.5	25	5~8	12	30/31	50
MG25-H4-09-SS	M25×1.5	25	6~9	12	30/31	50
MG27-H4-07-SS	M27×1.5 (2)	27	4~7	12	30/31	50
MG27-H4-08-SS	M27×1.5 (2)	27	5~8	12	30/31	50
MG30-H4-07-SS	M30×1.5 (2)	30	4~7	12.5	34/31	50
MG30-H4-08-SS	M30×1.5 (2)	30	5~8	12.5	34/31	50
MG30-H4-09-SS	M30×1.5 (2)	30	6~9	12.5	34/31	50
MG32-H4-07-SS	M32×1.5	32	4~7	12.5	38/40	20
MG32-H4-09-SS	M32×1.5	32	6~9	12.5	38/40	20
MG36-H4-07-SS	M36×1.5 (2)	36	4~7	13	42/40	20
MG36-H4-09-SS	M36×1.5 (2)	36	6~9	13	42/40	20
MG40S-H4-09-SS	M40×1.5	40	6~9	14	48/40	20
MG40-H4-11-SS	M40×1.5	40	8~11	14	48/50	10
MG40-H4-12-SS	M40×1.5	40	9~12	14	48/50	10
MG42-H4-12-SS	M42×2.0	42	9~12	15	48/50	10
MG48-H4-12-SS	M48×2.0	48	9~12	15	58/50	10
MG50S-H4-12-SS	M50×1.5	50	9~12	15	58/50	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4-H4-02	G1/4	13.15	1~2.3	9	17/17	50
G3/8-H4-03	G3/8	16.66	1.5~3	9.5	21/21	50
G1/2-H4-04	G1/2	20.95	1.5~3.5	12	24/24	50
G1/2D-H4-03	G1/2	20.95	1~2.5	12	24/26	50
G1/2D-H4-04	G1/2	20.95	1.5~3.5	12	24/26	50
G1/2D-H4-05	G1/2	20.95	2~4.5	12	24/26	50
G3/4-H4-05	G3/4	26.66	2~5	12	30/31	50
G3/4-H4-06	G3/4	26.66	3~6	12	30/31	50
G3/4-H4-07	G3/4	26.66	4~7	12	30/31	50
G3/4-H4-08	G3/4	26.66	5~8	12	30/31	50
G3/4-H4-09	G3/4	26.66	6~9	12	30/31	50
G1-H4-07	G1	33.2	4~7	15	38/40	20
G1-H4-09	G1	33.2	6~9	15	38/40	20
G1-1/4-H4-11	G1-1/4	41.9	8~11	15	48/50	10
G1-1/4-H4-12	G1-1/4	41.9	9~12	15	48/50	10
G1-1/2-H4-11	G1-1/2	47.8	8~11	15	55/50	10
G1-1/2-H4-12	G1-1/2	47.8	9~12	15	55/50	10
NPT1/4-H4-02	NPT1/4	13.15	1~2.3	9	17	50
NPT3/8-H4-03	NPT3/8	16.66	1.5~3	10	21	50
NPT1/2-H4-04	NPT1/2	20.95	1.5~3.5	11	24	50
NPT1/2D-H4-03	NPT1/2	20.95	1~2.5	13	26	50
NPT1/2D-H4-04	NPT1/2	20.95	1.5~3.5	13	26	50
NPT1/2D-H4-05	NPT1/2	20.95	2~4.5	13	26	50
NPT3/4-H4-05	NPT3/4	26.66	2~5	13	31	50
NPT3/4-H4-06	NPT3/4	26.66	3~6	13	31	50
NPT3/4-H4-07	NPT3/4	26.66	4~7	13	31	50
NPT3/4-H4-08	NPT3/4	26.66	5~8	13	31	50
NPT3/4-H4-09	NPT3/4	26.66	6~9	13	31	50
NPT1-H4-07	NPT1	33.2	4~7	15	40	20
NPT1-H4-09	NPT1	33.2	6~9	15	40	20
NPT1-1/4-H4-11	NPT1-1/4	41.9	8~11	15	50	10
NPT1-1/4-H4-12	NPT1-1/4	41.9	9~12	15	50	10
NPT1-1/2-H4-11	NPT1-1/2	47.8	8~11	15	50	10
NPT1-1/2-H4-12	NPT1-1/2	47.8	9~12	15	50	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG7-H4-02-SS	PG7	12.5	1~2.3	9	15/17	50
PG9-H4-02-SS	PG9	15.2	1~2.3	9	17/17	50
PG11-H4-03-SS	PG11	18.6	1.5~3	9.5	21/21	50
PG13.5-H4-04-SS	PG13.5	20.4	2~4	10.5	24/24	50
PG16-H4-03-SS	PG16	22.5	1~2.5	12	26/26	50
PG16-H4-04-SS	PG16	22.5	1.5~3.5	12	26/26	50
PG16-H4-05-SS	PG16	22.5	2~4.5	12	26/26	50
PG19-H4-03-SS	PG19	23.8	1~2.5	10.5	28/26	50
PG19-H4-04-SS	PG19	23.8	1.5~3.5	10.5	28/26	50
PG19-H4-05-SS	PG19	23.8	3~6	10.5	28/26	50
PG21-H4-05-SS	PG21	28.6	2~5	12	32/31	50
PG21-H4-06-SS	PG21	28.6	3~6	12	32/31	50
PG21-H4-07-SS	PG21	28.6	4~7	12	32/31	50
PG21-H4-08-SS	PG21	28.6	5~8	12	32/31	50
PG21-H4-09-SS	PG21	28.6	6~9	12	32/31	50
PG25-H4-05-SS	PG25	29.8	2~5	12.5	34/31	50
PG25-H4-06-SS	PG25	29.8	3~6	12.5	34/31	50
PG25-H4-07-SS	PG25	29.8	4~7	12.5	34/31	50
PG25-H4-08-SS	PG25	29.8	5~8	12.5	34/31	50
PG25-H4-08-SS	PG25	29.8	6~9	12.5	34/31	50
PG29-H4-07-SS	PG29	37	4~7	12.5	40/40	20
PG29-H4-09-SS	PG29	37	6~9	12.5	40/40	20
PG36-H4-11-SS	PG36	47	8~11	15	58/50	10
PG36-H4-12-SS	PG36	47	9~12	15	58/50	10

五孔型不锈钢电缆防水接头

Five hole stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

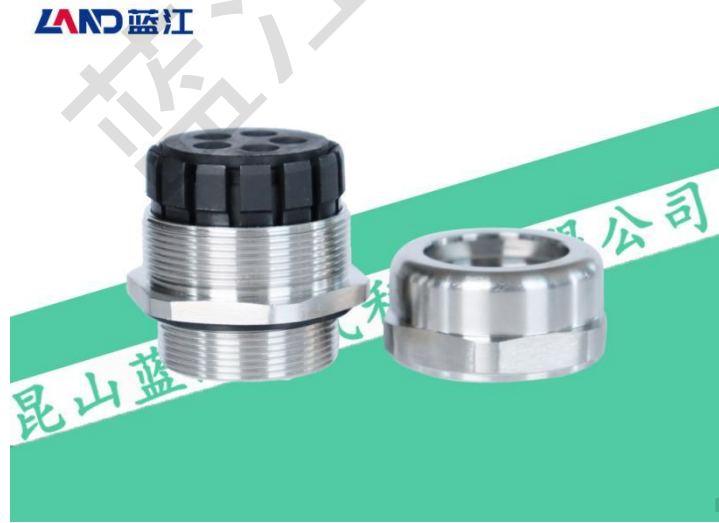

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

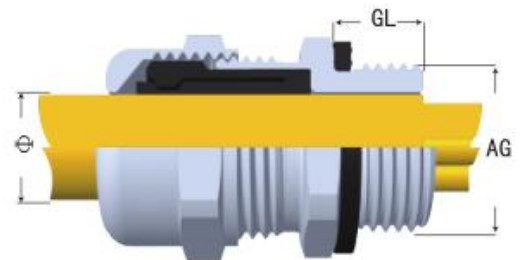

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG20-H5-03-SS	M20×1.5	20	1.5~3	12	26/26	50
MG20-H5-04-SS	M20×1.5	20	2~4	12	26/26	50
MG22-H5-03-SS	M22×1.5	22	1.5~3	12	26/26	50
MG22-H5-04-SS	M22×1.5	22	2~4	12	26/26	50
MG24-H5-03-SS	M24×1.5	24	1.5~3	10	29/27	50
MG24-H5-04-SS	M24×1.5	24	2~4	10	29/27	50
MG25-H5-05-SS	M25×1.5	25	3~5	12	30/31	50
MG25-H5-06-SS	M25×1.5	25	4~6	12	30/31	50
MG25-H5-07-SS	M25×1.5	25	5~7	12	30/31	50
MG27-H5-05-SS	M27×1.5(2)	27	3~5	12	30/31	50
MG27-H5-06-SS	M27×1.5(2)	27	4~6	12	30/31	50
MG27-H5-07-SS	M27×1.5(2)	27	5~7	12	30/31	50
MG30-H5-05-SS	M30×1.5(2)	30	3~5	12.5	34/31	50
MG30-H5-06-SS	M30×1.5(2)	30	4~6	12.5	34/31	50
MG30-H5-07-SS	M30×1.5(2)	30	5~7	12.5	34/31	50
MG32-H5-08-SS	M32×1.5	32	5~8	12.5	38/40	20
MG36-H5-08-SS	M36×1.5(2)	36	5~8	13	42/40	20
MG40-H5-08-SS	M40×1.5	40	5~8	14	48/50	10
MG40-H5-09-SS	M40×1.5	40	6~9	14	48/50	10
MG42-H5-08-SS	M42×2.0	42	5~8	15	48/50	10
MG48-H5-08-SS	M48×2.0	48	5~8	15	48/50	10
MG50S-H5-08-SS	M50×1.5	50	5~8	15	58/50	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG13.5-H5-03-SS	PG13.5	20.4	1.5~3	10.5	24/26	50
PG13.5-H5-04-SS	PG13.5	20.4	2~4	10.5	24/26	50
PG16-H5-03-SS	PG16	22.5	1.5~3	12	26/26	50
PG16-H5-04-SS	PG16	22.5	2~4	12	26/26	50
PG19-H5-04-SS	PG19	23.8	2~4	10.5	28/26	50
PG21-H5-05-SS	PG21	28.3	3~5	12	32/31	50
PG21-H5-06-SS	PG21	28.3	4~6	12	32/31	50
PG21-H5-07-SS	PG21	28.3	5~7	12	32/31	50
PG25-H5-06-SS	PG25	29.8	4~6	12.5	34/31	50
PG29-H5-08-SS	PG29	37	5~8	12.5	40/40	20
PG36-H5-08-SS	PG36	47	5~8	15	58/50	10
PG36-H5-09-SS	PG36	47	6~9	15	58/50	10
G1/2-H5-03-SS	G1/2	20.95	1.5~3	12	24/26	50
G1/2-H5-04-SS	G1/2	20.95	2~4	12	24/26	50
G3/4-H5-05-SS	G3/4	26.66	3~5	12	30/31	50
G3/4-H5-06-SS	G3/4	26.66	4~6	12	30/31	50
G3/4-H5-07-SS	G3/4	26.66	5~7	12	30/31	50
G1-H5-08-SS	G1	33.2	5~8	15	38/40	20
G1-1/4-H5-08-SS	G1-1/4	41.9	5~8	15	48/50	10
G1-1/2-H5-08-SS	G1-1/2	47.8	5~8	15	55/50	10
NPT1/2-H5-03-SS	NPT1/2	20.95	1.5~3	13	26	50
NPT1/2-H5-04-SS	NPT1/2	20.95	2~4	13	26	50
NPT3/4-H5-05-SS	NPT3/4	26.66	3~5	13	31	50
NPT3/4-H5-06-SS	NPT3/4	26.66	4~6	13	31	50
NPT3/4-H5-07-SS	NPT3/4	26.66	5~7	13	31	50
NPT1-H5-08-SS	NPT1	33.2	5~8	15	40	20
NPT1-1/4-H5-08-SS	NPT1-1/4	41.9	5~8	15	50	10
NPT1-1/2-H5-08-SS	NPT1-1/2	47.8	5~8	15	50	10

六孔型不锈钢电缆防水接头

Six hole stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

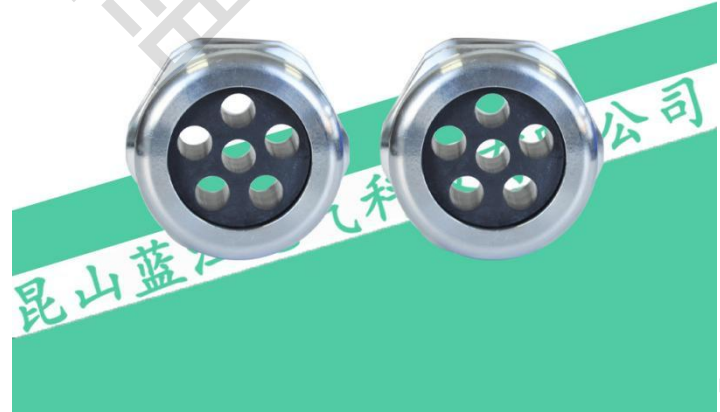

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

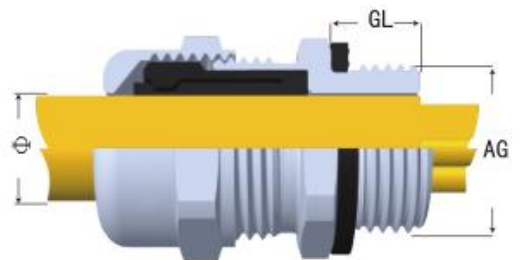

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG16-H6-02-SS	M16×1.5	16	1~2.1	9.5	20/21	50
MG18-H6-02-SS	M18×1.5	18	1~2.1	9.5	21/21	50
MG20-H6-03-SS	M20×1.5	20	2~3.5	12	24/26	50
MG20-H6-04-SS	M20×1.5	20	2~4	12	24/26	50
MG22-H6-03-SS	M22×1.5	22	2~3.5	12	26/26	50
MG22-H6-04-SS	M22×1.5	22	2~4	12	26/26	50
MG24-H6-03-SS	M24×1.5	24	2~3.5	10.5	28/26	50
MG24-H6-04-SS	M24×1.5	24	2~4	10.5	28/26	50
MG25-H6-05-SS	M25×1.5	25	3~5	12	30/31	50
MG27-H6-05-SS	M27×1.5(2)	27	3~5	12	30/31	50
MG30-H6-05-SS	M30×1.5(2)	30	3~5	12.5	34/31	50
MG32-H6-05-SS	M32×1.5	32	3~5	12.5	38/40	20
MG32-H6-07-SS	M32×1.5	32	4~7	12.5	38/40	20
MG36-H6-07-SS	M36×1.5(2)	36	4~7	13	42/40	20
MG40-H6-08-SS	M40×1.5	40	5~8	14	48/50	10
MG42-H6-08-SS	M42×2.0	42	5~8	15	48/50	10
MG48-H6-08-SS	M48×2.0	48	5~8	15	58/50	10
MG50S-H6-08-SS	M50×1.5	50	5~8	15	58/50	10
MG63-H6-12-SS	M63×1.5	63	8~12	15	71/76	10
PG11-H6-02-SS	PG11	18.6	1~2.1	9.5	21/21	50
PG13.5-H6-03-SS	PG13.5	20.5	1.5~3	10.5	24/26	50
PG16-H6-03-SS	PG16	22.5	1.5~3	12	26/26	50
PG16-H6-04-SS	PG16	22.5	2~4	12	26/26	50
PG21-H6-05-SS	PG21	28.3	3~5	12	32/31	50
PG29-H6-05-SS	PG29	37	3~5	12.5	40/40	20
PG29-H6-07-SS	PG29	37	4~7	12.5	40/40	20
PG36-H6-08-SS	PG36	47	5~8	15	58/50	10
PG48-H6-12-SS	PG48	59.3	8~12	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G3/8-H6-02-SS	G3/8	16.66	1~2.1	9.5	21/21	50
G1/2-H6-03-SS	G1/2	20.4	1.5~3	12	24/26	50
G1/2-H6-04-SS	G1/2	20.4	2~4	12	24/26	50
G3/4-H6-05-SS	G3/4	26.66	3~5	12	30/31	50
G1-H6-05-SS	G1	33.2	3~5	15	38/40	20
G1-H6-07-SS	G1	33.2	4~7	15	38/40	20
G1-1/4-H6-08-SS	G1-1/4	41.9	5~8	15	48/50	10
G1-1/2-H6-08-SS	G1-1/2	47.8	5~8	15	55/50	10
G2-H6-12-SS	G2	59.6	14~17	15	71/76	10
NPT3/8-H6-02-SS	NPT3/8	16.66	1~2.1	10	21	50
NPT1/2-H6-03-SS	NPT1/2	20.4	1.5~3	13	26	50
NPT1/2-H6-04-SS	NPT1/2	20.4	2~4	13	26	50
NPT3/4-H6-05-SS	NPT3/4	26.66	3~5	13	31	50
NPT1-H6-05-SS	NPT1	33.2	3~5	15	40	20
NPT1-H6-07-SS	NPT1	33.2	4~7	15	40	20
NPT1-1/4-H6-08-SS	NPT1-1/4	41.9	5~8	15	50	10
NPT1-1/2-H6-08-SS	NPT1-1/2	47.8	5~8	15	50	10
NPT2-H6-12-SS	NPT2	59.6	14~17	15	76	10

七孔型不锈钢电缆防水接头

Seven hole stainless steel cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

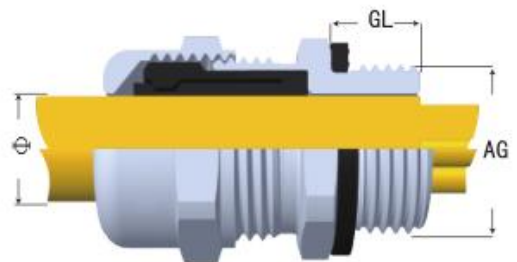

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG25-H7-04-SS	M25×1.5	25	2~4	12	30/31	50
MG27-H7-04-SS	M27×1.5 (2)	27	2~4	12	30/31	50
MG30-H7-04-SS	M30×1.5 (2)	30	2~4	12.5	34/31	50
MG32-H7-06-SS	M32×1.5	32	4~6	12.5	38/40	20
MG36-H7-06-SS	M36×1.5 (2)	36	4~6	13	42/40	20
MG40-H7-08-SS	M40×1.5	40	5~8	14	48/50	10
MG42-H7-08-SS	M42×2.0	42	5~8	15	48/50	10
MG48-H7-08-SS	M48×2.0	48	5~8	15	58/50	10
MG50S-H7-08-SS	M50×1.5	50	5~8	15	58/50	10
PG21-H7-04-SS	PG21	28.3	2~4	12	32/31	50
PG29-H7-06-SS	PG29	37	4~6	12.5	40/40	20
PG36-H7-08-SS	PG36	47	5~8	15	58/50	10
G3/4-H7-04-SS	G3/4	26.66	2~4.3	12	30/31	50
G1-H7-06-SS	G1	33.2	4~6	15	38/40	20
G1-1/4-H7-08-SS	G1-1/4	41.9	5~8	15	48/50	10
G1-1/2-H7-08-SS	G1-1/2	47.8	5~8	15	55/50	10
NPT3/4-H7-04-SS	NPT3/4	26.66	2~4.3	13	31	50
NPT1-H7-06-SS	NPT1	33.2	4~6	15	40	20
NPT1-1/4-H7-08-SS	NPT1-1/4	41.9	5~8	15	50	10
NPT1-1/2-H7-08-SS	NPT1-1/2	47.8	5~8	15	50	10

八孔型不锈钢电缆防水接头

Eight hole stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 并保持防水密封性能不变

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

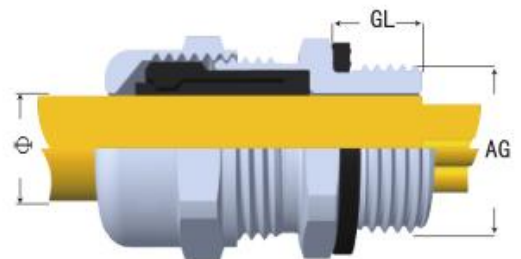

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG16-H8-02-SS	M16×1.5	16	1~2.1	15	22/22	50
MG18-H8-02-SS	M18×1.5	18	1~2.1	15	22/22	50
MG25-H8-04-SS	M25×1.5	25	2~4	15	33/33	50
MG27-H8-04-SS	M27×1.5 (2)	27	2~4	12	30/31	50
MG30-H8-04-SS	M30×1.5 (2)	30	2~4	12.5	34/31	50
MG32-H8-05-SS	M32×1.5	32	3~5	15	41/41	20
MG36-H8-05-SS	M36×1.5 (2)	36	3~5	13	42/40	20
MG40-H8-04-SS	M40×1.5	40	3~4	14	48/50	10
MG40-H8-06-SS	M40×1.5	40	4~6	14	48/50	10
MG42-H8-06-SS	M42×2.0	42	4~6	15	48/50	10
MG48-H8-06-SS	M48×2.0	48	4~6	15	58/50	10
MG50S-H8-06-SS	M50×1.5	50	4~6	15	58/50	10
PG11-H8-02-SS	PG11	18.6	1~2.1	9.5	21/21	50
PG21-H8-04-SS	PG21	28.3	2~4	12	32/31	50
PG29-H8-05-SS	PG29	37	3~5	12.5	40/40	20
PG36-H8-04-SS	PG36	47	3~4	15	58/50	10
PG36-H8-06-SS	PG36	47	4~6	15	58/50	10
G3/8-H8-02-SS	G3/8	16.66	1~2.1	9.5	21/21	50
G3/4-H8-04-SS	G3/4	26.66	2~4	12	30/31	50
G1-H8-05-SS	G1	33.2	3~5	15	38/40	20
G1-1/4-H8-04-SS	G1-1/4	41.9	3~4	15	48/50	10
G1-1/4-H8-06-SS	G1-1/4	41.9	4~6	15	48/50	10
G1-1/2-H8-04-SS	G1-1/2	47.8	3~4	15	55/50	10
G1-1/2-H8-06-SS	G1-1/2	47.8	4~6	15	55/50	10
NPT3/8-H8-02-SS	NPT3/8	16.66	1~2.1	10	21	50
NPT3/4-H8-04-SS	NPT3/4	26.66	2~4	13	31	50
NPT1-H8-05-SS	NPT1	33.2	3~5	15	40	20
NPT1-1/4-H8-04-SS	NPT1-1/4	41.9	3~4	15	50	10
NPT1-1/4-H8-06-SS	NPT1-1/4	41.9	4~6	15	50	10
NPT1-1/2-H8-04-SS	NPT1-1/2	47.8	3~4	15	50	10
NPT1-1/2-H8-06-SS	NPT1-1/2	47.8	4~6	15	50	10

九孔型不锈钢防水接头

Nine hole stainless steel cable gland


产品材料：304材质，可选316和316L

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆线，并保持防水密封性能不变

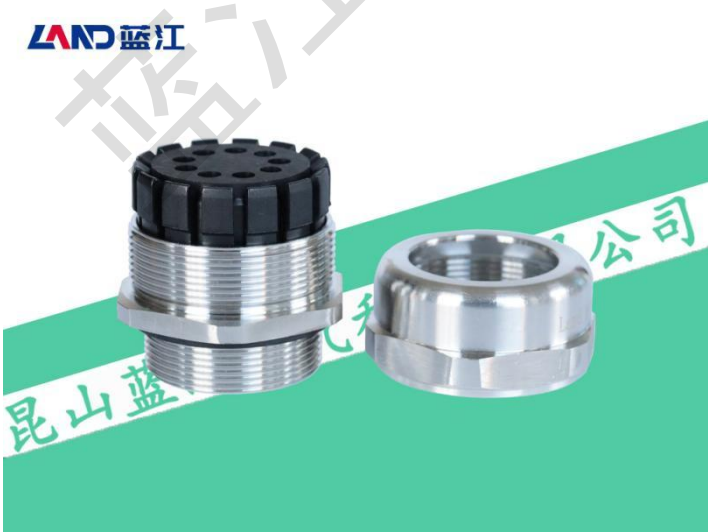

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

产品参数表（九孔）

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG40-H9-05-SS	M40×1.5	40	3~5	14	48/50	10
MG42-H9-05-SS	M42×2.0	42	3~5	15	48/50	10
MG48-H9-05-SS	M48×2.0	48	3~5	15	58/50	10
MG50S-H9-05-SS	M50×1.5	50	3~5	15	58/50	10
PG36-H9-05-SS	PG36	47	3~5	15	57/50	10
G1-1/4-H9-05-SS	G1-1/4	41.9	3~5	15	55/60	10
G1-1/2-H9-05-SS	G1-1/2	47.8	3~5	15	55/60	10
NPT1-1/4-H9-05-SS	NPT1-1/4	41.9	3~5	15	60	10
NPT1-1/2-H9-05-SS	NPT1-1/2	47.8	3~5	15	60	10

十孔型不锈钢防水接头

Ten hole stainless steel cable gland


产品材料：304材质，可选316和316L

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆线，并保持防水密封性能不变

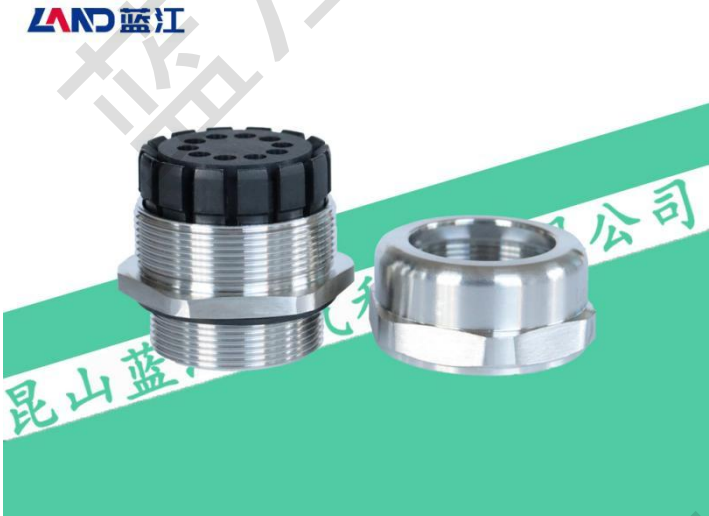

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

产品参数表（十孔）

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG40-H10-05-SS	M40×1.5	40	3~5	14	48/50	10
MG42-H10-05-SS	M42×2.0	42	3~5	15	48/50	10
MG48-H10-05-SS	M48×2.0	48	3~5	15	58/50	10
PG36-H10-05-SS	PG36	47	3~5	15	57/50	10
G1-1/4-H10-05-SS	G1-1/4	41.9	3~5	15	55/60	10
G1-1/2-H10-05-SS	G1-1/2	47.8	3~5	15	55/60	10
NPT1-1/4-H10-05-SS	NPT1-1/4	41.9	3~5	15	60	10
NPT1-1/2-H10-05-SS	NPT1-1/2	47.8	3~5	15	60	10

内螺纹不锈钢电缆防水接头

Internal thread Stainless Steel Cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C



设计特点: 内螺纹连接设计, 密封圈默认装配分体单孔内

芯, 也可以装配多孔, 扁孔等, 产品可以通过内丝连接各

类外丝产品, 防护等级高, 产品抗拉力强

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

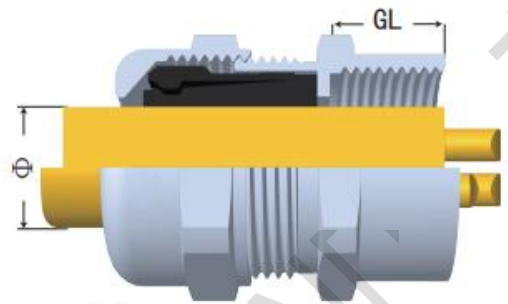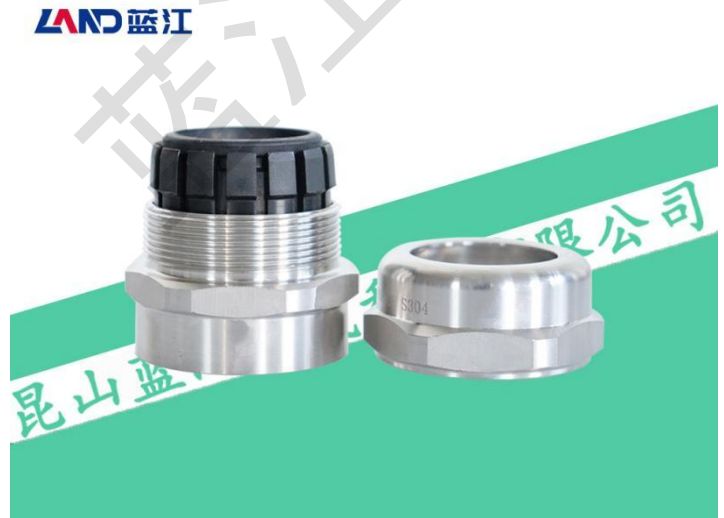

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Internal thread connection design, the sealing ring is equipped with a split single hole inner core by default, and can also be equipped with multiple holes, flat holes, etc.

The product can be connected to various external thread products through internal threads, with high protection level and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
MG12F-08-SS	M12×1.5	4~8	9	15/17	50
MG12F-05-SS	M12×1.5	3~5.5	9	15/17	50
MG12F-03-SS	M12×1.5	1.5~3	9	15/17	50
MG16F-10-SS	M16×1.5	6~10	9.5	20/21	50
MG16F-07-SS	M16×1.5	4~7	9.5	20/21	50
MG16F-05-SS	M16×1.5	3~5	9.5	20/21	50
MG16F-04-SS	M16×1.5	2~4	9.5	20/21	50
MG18F-10-SS	M18×1.5	6~10	9.5	21/21	50
MG18F-07-SS	M18×1.5	4~7	9.5	21/21	50
MG20F-14-SS	M20×1.5	8~14	12	24/26	50
MG20F-12-SS	M20×1.5	7~12	12	24/24	50
MG20F-11-SS	M20×1.5	6~11	12	24/24	50
MG20F-09-SS	M20×1.5	5~9	12	24/24	50
MG22F-14-SS	M22×1.5	8~14	12	26/26	50
MG22F-11-SS	M22×1.5	7~11	12	26/26	50
MG22F-09-SS	M22×1.5	6~9	12	26/26	50
MG25F-18-SS	M25×1.5	13~18	12	30/31	50
MG25F-16-SS	M25×1.5	12~16	12	30/31	50
MG27F-18-SS	M27×1.5 (2)	13~18	12	30/31	50
MG27F-16-SS	M27×1.5 (2)	11~16	12	30/31	50
MG30F-18-SS	M30×1.5	13~18	12.5	34/31	50
MG32F-25-SS	M32×1.5	18~25	12.5	38/40	20
MG32F-22-SS	M32×1.5	17~22	12.5	38/40	20
MG40F-31-SS	M40×1.5	25~31	14	48/50	10
MG40F-25-SS	M40×1.5	18~25	14	48/50	10
MG50F-41-SS	M50×1.5	33~41	15	58/60	10
MG50F-33-SS	M50×1.5	25~33	15	58/60	10
MG63F-54-SS	M63×1.5	46~54	15	71/76	10
MG63F-46-SS	M63×1.5	38~46	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
PG7F-08-SS	PG7	4~8	9	15/17	50
PG7F-05-SS	PG7	3~5.5	9	15/17	50
PG7F-03-SS	PG7	1.5~3	9	15/17	50
PG9F-08-SS	PG9	4~8	9	17/17	50
PG9F-05-SS	PG9	3~5.5	9	17/17	50
PG9F-03-SS	PG9	1.5~3	9	17/17	50
PG11F-10-SS	PG11	6~10	9.5	21/21	50
PG11F-07-SS	PG11	4~7	9.5	21/21	50
PG11F-05-SS	PG11	3~5	9.5	21/21	50
PG11F-04-SS	PG11	2~4	9.5	21/21	50
PG13.5F-12-SS	PG13.5	7~12	10.5	24/24	50
PG13.5F-11-SS	PG13.5	6~11	10.5	24/24	50
PG13.5F-09-SS	PG13.5	5~9	10.5	24/24	50
PG16F-14-SS	PG16	8~14	12	26/26	50
PG16F-11-SS	PG16	7~11	12	26/26	50
PG16F-09-SS	PG16	6~9	12	26/26	50
PG16F-06-SS	PG16	3~6	12	26/26	50
PG21F-18-SS	PG21	13~18	12	32/31	50
PG21F-16-SS	PG21	12~16	12	32/31	50
PG21F-14-SS	PG21	8~14	12	32/31	50
PG21F-10-SS	PG21	6~10	12	32/31	50
PG29F-25-SS	PG29	18~25	12.5	40/40	20
PG29F-22-SS	PG29	17~22	12.5	40/40	20
PG36F-31-SS	PG36	25~31	15	58/50	10
PG36F-25-SS	PG36	18~25	15	58/50	10
PG42F-41-SS	PG42	33~41	15	60/60	10
PG42F-33-SS	PG42	25~33	15	60/60	10
PG48F-44-SS	PG48	36~44	15	71/76	10
PG48F-54-SS	PG48	46~54	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
G1/4F-08-SS	G1/4	4~8	9	17/17	50
G1/4F-05-SS	G1/4	3~5.5	9	17/17	50
G3/8F-10-SS	G3/8	6~10	9.5	21/21	50
G3/8F-07-SS	G3/8	4~7	9.5	21/21	50
G1/2F-14-SS	G1/2	8~14	12	24/26	50
G1/2F-12-SS	G1/2	7~12	12	24/24	50
G1/2F-11-SS	G1/2	6~11	12	24/24	50
G1/2F-09-SS	G1/2	5~9	12	24/24	50
G3/4F-18-SS	G3/4	13~18	12	30/31	50
G3/4F-16-SS	G3/4	12~16	12	30/31	50
G1F-25-SS	G1	18~25	15	38/40	20
G1F-22-SS	G1	17~22	15	38/40	20
G1-1/4F-31-SS	G1-1/4	25~31	15	48/50	10
G1-1/4F-25-SS	G1-1/4	18~25	15	48/50	10
G1-1/2F-31-SS	G1-1/2	25~31	15	55/50	10
G1-1/2F-25-SS	G1-1/2	18~25	15	55/50	10
G2F-44-SS	G2	36~44	15	71/65	1
NPT1/4F-08-SS	NPT1/4	4~8	9	17	50
NPT1/4F-05-SS	NPT1/4	3~5.5	9	17	50
NPT3/8F-10-SS	NPT3/8	6~10	10	21	50
NPT1/2F-14-SS	NPT1/2	8~14	13	26	50
NPT1/2F-12-SS	NPT1/2	7~12	11	24	50
NPT1/2F-11-SS	NPT1/2	6~11	11	24	50
NPT1/2F-09-SS	NPT1/2	5~9	11	24	50
NPT3/4F-18-SS	NPT3/4	13~18	13	31	50
NPT3/4F-16-SS	NPT3/4	12~16	13	31	50
NPT1F-25-SS	NPT1	18~25	15	40	20
NPT1F-22-SS	NPT1	17~22	15	40	20
NPT1-1/4F-31-SS	NPT1-1/4	25~31	15	50	10
NPT1-1/4F-25-SS	NPT1-1/4	18~25	15	50	10
NPT1-1/2F-31-SS	NPT1-1/2	25~31	15	50	10
NPT1-1/2F-25-SS	NPT1-1/2	18~25	15	50	10
NPT2F-44-SS	NPT2	36~44	15	65	10

接管式不锈钢防水接头

Pipe connected stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C


设计特点: 内外丝接管设计, 密封圈默认为单孔内芯,

也可以装配多孔, 扁孔等, 产品外丝连接设备, 内丝

可以连接各类管件, 符合防爆Ex eb IIC Gb/Ex tb IIIC Db标准。

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通等

订购说明: 默认不附螺母, 如需316及316L请另外说明

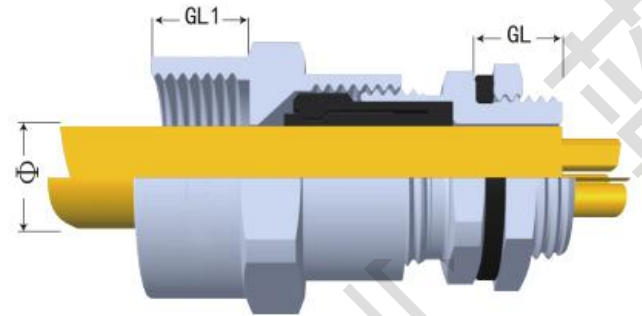

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Internal and external wire connection design, the sealing ring defaults to a single hole inner core, but can also be equipped with multiple holes, flat holes, etc. The product's external wire connection equipment and internal wire can be connected to various pipe fittings, complying with explosion-proof Ex eb IIC Gb/Ex tb IIIC Db standards

Application:Electrical, marine, electrical, mechanical equipment, rail transit

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

常规接管参数表

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M-thread	F-thread	Cable range	Thread L	Wrench Size	packaging
PN.	M	F	Φ mm	GL mm	nut/cap mm	PCS
JGEX-M12-08-SS	M12×1.5	M12×1.5	4~8	9	15/17	50
JGEX-M16-08-SS	M16×1.5	M16×1.5	4~8	9.5	20/17	50
JGEX-M16-10-SS	M16×1.5	M16×1.5	6~10	9.5	20/21	50
JGEX-M20-14-SS	M20×1.5	M20×1.5	8~14	12	24/26	50
JGEX-M20-12-SS	M20×1.5	M20×1.5	7~12	12	24/24	50
JGEX-M20-11-SS	M20×1.5	M20×1.5	6~10.5	12	24/24	50
JGEX-M20-09-SS	M20×1.5	M20×1.5	5~9	12	24/24	50
JGEX-M22-14-SS	M22×1.5	M22×1.5	8~14	12	26/26	50
JGEX-M24-14-SS	M24×1.5	M24×1.5	8~14	10.5	28/26	50
JGEX-M25-18-SS	M25×1.5	M25×1.5	13~18	12	30/31	50
JGEX-M32-25-SS	M32×1.5	M32×1.5	18~25	12.5	38/40	20
JGEX-M40-31-SS	M40×1.5	M40×1.5	25~31	14	48/50	10
JGEX-M50-41-SS	M50×1.5	M50×1.5	33~41	15	58/60	10
JGEX-M63-44-SS	M63×1.5	M63×1.5	36~44	15	71/65	10
JGEX-G1/4-08-SS	G1/4	G1/4	4~8	9	17/17	50
JGEX-G3/8-10-SS	G3/8	G3/8	6~10	9.5	21/21	50
JGEX-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
JGEX-G1/2-12-SS	G1/2	G1/2	7~12	12	24/24	50
JGEX-G3/4-18-SS	G3/4	G3/4	13~18	12	31/31	50
JGEX-G1-25-SS	G1	G1	18~25	12.5	38/40	20
JGEX-G1-1/4-31-SS	G1-1/4	G1-1/4	25~31	14	48/50	10
JGEX-G1-1/2-31-SS	G1-1/2	G1-1/2	25~31	15	58/50	10
JGEX-G2-44-SS	G2	G2	36~44	15	71/65	10
JGEX-NPT1/4-08-SS	NPT1/4	NPT1/4	4~8	9	17	50
JGEX-NPT3/8-10-SS	NPT3/8	NPT3/8	6~10	10	21	50
JGEX-NPT1/2-14-SS	NPT1/2	NPT1/2	8~14	13	26	50
JGEX-NPT1/2-12-SS	NPT1/2	NPT1/2	7~12	12	24/24	50
JGEX-NPT3/4-18-SS	NPT3/4	NPT3/4	13~18	12	30/31	50
JGEX-NPT1-25-SS	NPT1	NPT1	18~25	12.5	38/40	20
JGEX-NPT1-1/4-31-SS	NPT1-1/4	NPT1-1/4	25~31	14	48/50	10
JGEX-NPT1-1/2-31-SS	NPT1-1/2	NPT1-1/2	25~31	15	58/50	10
JGEX-NPT2-44-SS	NPT2	NPT2	36~44	15	71/65	10

非标接管参数表

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M-thread	F-thread	Cable range	Thread L	Wrench Size	packaging
PN.	M	F	Φ mm	GL mm	nut/cap mm	PCS
JGEX-M20-G1/2-12-SS	M20×1.5	G1/2	7~12	12	24/24	50
JGEX-M20-G3/4-12-SS	M20×1.5	G3/4	7~12	12	24/31	50
JGEX-M20-NPT1/2-12-SS	M20×1.5	NPT1/2	7~12	12	24/24	50
JGEX-M20-NPT3/4-12-SS	M20×1.5	NPT3/4	7~12	12	24/31	50
JGEX-M20-M25-12-SS	M20×1.5	M25×1.5	7~12	12	24/31	50
JGEX-M25-G3/4-18-SS	M25×1.5	G3/4	13~18	12	30/31	50
JGEX-M25-G1-18-SS	M25×1.5	G1	13~18	12	30/40	50
JGEX-M25-NPT3/4-18-SS	M25×1.5	NPT3/4	13~18	12	30/31	50
JGEX-M25-NPT1-18-SS	M25×1.5	NPT1	13~18	12	30/40	50
JGEX-M25-M32-18-SS	M25×1.5	M32×1.5	13~18	12	30/40	50
JGEX-M32-G1-25-SS	M32×1.5	G1	18~25	12.5	38/40	20
JGEX-M32-NPT1-25-SS	M32×1.5	NPT1	18~25	12.5	38/40	20
JGEX-G1/2-M20-12-SS	G1/2	M20×1.5	7~12	12	24/24	50
JGEX-G1/2-M25-12-SS	G1/2	M25×1.5	7~12	12	24/31	50
JGEX-G1/2-NPT1/2-12-SS	G1/2	NPT1/2	7~12	12	24/24	50
JGEX-G1/2-NPT3/4-12-SS	G1/2	NPT3/4	7~12	12	24/31	50
JGEX-G1/2-G3/4-12-SS	G1/2	G3/4	7~12	12	24/31	50
JGEX-G3/4-M25-18-SS	G3/4	M25×1.5	13~18	12	31/31	50
JGEX-G3/4-NPT3/4-18-SS	G3/4	NPT3/4	13~18	12	31/31	50
JGEX-G1-M32-25-SS	G1	M32×1.5	18~25	12.5	38/40	20
JGEX-G1-NPT1-25-SS	G1	NPT1	18~25	12.5	38/40	20
JGEX-NPT1/2-M20-12-SS	NPT1/2	M20×1.5	7~12	12	24/24	50
JGEX-NPT1/2-M25-12-SS	NPT1/2	M25×1.5	7~12	12	24/31	50
JGEX-NPT1/2-G1/2-12-SS	NPT1/2	G1/2	7~12	12	24/24	50
JGEX-NPT1/2-G3/4-12-SS	NPT1/2	G3/4	7~12	12	24/31	50
JGEX-NPT1/2-NPT3/4-12-SS	NPT1/2	NPT3/4	7~12	12	24/31	50
JGEX-NPT3/4-M25-18-SS	NPT3/4	M25×1.5	13~18	12	30/31	50
JGEX-NPT3/4-G3/4-18-SS	NPT3/4	G3/4	13~18	12	30/31	50
JGEX-NPT1-M32-25-SS	NPT1	M32×1.5	18~25	12.5	38/40	20
JGEX-NPT1-G1-25-SS	NPT1	G1	18~25	12.5	38/40	20

双锁紧不锈钢电缆防水接头

Double locking stainless steel cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C


设计特点: 双层锁紧密封设计, 密封圈默认为单孔内芯,

也可以装配多孔, 扁孔内芯等, 可同时锁紧电缆与外护

套, 防护等级高, 抗拉力强, 广泛应用于各类机械设备

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

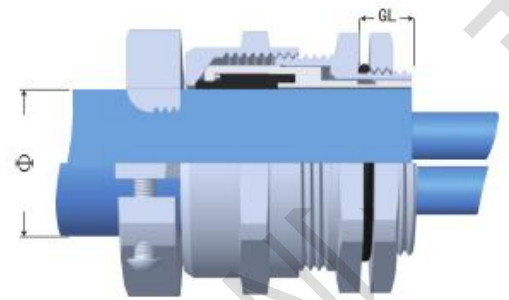

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Double layer locking seal design, the sealing ring defaults to a single hole inner core, but can also be equipped with multiple holes, flat hole inner cores, etc. It can simultaneously lock cables and outer sheaths, provide high protection, and has strong tensile strength. It is widely used in various mechanical equipment

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
SJ-M12-08-SS	M12×1.5	12	4~8	9	15/17	50
SJ-M12-05-SS	M12×1.5	12	3~5.5	9	15/17	50
SJ-M14-08-SS	M14×1.5	14	4~8	9	17/17	50
SJ-M14-05-SS	M14×1.5	14	3~5.5	9	17/17	50
SJ-M16S-08-SS	M16×1.5	16	4~8	9.5	20/17	50
SJ-M16S-05-SS	M16×1.5	16	3~5.5	9.5	20/17	50
SJ-M16-10-SS	M16×1.5	16	6~10	9.5	20/21	50
SJ-M16-07-SS	M16×1.5	16	4~7	9.5	20/21	50
SJ-M18-10-SS	M18×1.5	18	6~10	9.5	21/21	50
SJ-M18-07-SS	M18×1.5	18	4~7	9.5	21/21	50
SJ-M20-14-SS	M20×1.5	20	8~14	12	24/26	50
SJ-M20-12-SS	M20×1.5	20	7~12	12	24/24	50
SJ-M22-14-SS	M22×1.5	22	8~14	12	26/26	50
SJ-M24-14-SS	M24×1.5	24	8~14	10.5	28/26	50
SJ-M25-18-SS	M25×1.5	25	13~18	12	30/31	50
SJ-M25-16-SS	M25×1.5	25	12~16	12	30/31	50
SJ-M27-18-SS	M27×1.5(2)	27	13~18	12	30/31	50
SJ-M30-18-SS	M30×1.5(2)	30	13~18	12.5	34/31	50
SJ-M32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
SJ-M32-22-SS	M32×1.5	32	17~22	12.5	38/40	20
SJ-M33-25-SS	M33×2.0	33	18~25	14.5	38/40	20
SJ-M36-25-SS	M36×1.5(2)	36	18~25	13	42/40	20
SJ-M40-31-SS	M40×1.5	40	25~31	14	48/50	10
SJ-M40-25-SS	M40×1.5	40	18~25	14	48/50	10
SJ-M42-31-SS	M42×2.0	42	25~31	15	48/50	10
SJ-M48-31-SS	M48×2.0	48	25~31	15	58/50	10
SJ-M50-41-SS	M50×1.5	50	33~41	15	58/60	10
SJ-M50-33-SS	M50×1.5	50	25~33	15	58/60	10
SJ-M60-41-SS	M60×2.0	60	33~41	15	71/60	10
SJ-M63-41-SS	M63×1.5	63	33~41	15	71/60	10
SJ-M63-54-SS	M63×1.5	63	46~54	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹尺寸	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	AG Φ mm	mm	mm	nut/cap mm	PCS
SJ-PG7-08-SS	PG7	12.5	4~8	9	15/17	50
SJ-PG7-05-SS	PG7	12.5	3~5.5	9	15/17	50
SJ-PG9-08-SS	PG9	15.2	4~8	9	17/17	50
SJ-PG9-05-SS	PG9	15.2	3~5.5	9	17/17	50
SJ-PG11-10-SS	PG11	18.6	6~10	9.5	21/21	50
SJ-PG11-07-SS	PG11	18.6	4~7	9.5	21/21	50
SJ-PG13.5-14-SS	PG13.5	20.4	8~14	10.5	24/26	50
SJ-PG13.5-12-SS	PG13.5	20.4	7~12	10.5	24/24	50
SJ-PG13.5-11-SS	PG13.5	20.4	6~11	10.5	24/24	50
SJ-PG13.5-09-SS	PG13.5	20.4	5~9	10.5	24/24	50
SJ-PG16-14-SS	PG16	22.5	8~14	12	26/26	50
SJ-PG16-11-SS	PG16	22.5	7~11	12	26/26	50
SJ-PG16-06-SS	PG16	22.5	3~6	12	26/26	50
SJ-PG21-18-SS	PG21	28.3	13~18	12	32/31	50
SJ-PG21-16-SS	PG21	28.3	12~16	12	32/31	50
SJ-PG21-14-SS	PG21	28.3	8~14	12	32/31	50
SJ-PG21-10-SS	PG21	28.3	6~10	12	32/31	50
SJ-PG29-25-SS	PG29	37	18~25	12.5	40/40	20
SJ-PG29-22-SS	PG29	37	17~22	12.5	40/40	20
SJ-PG36-31-SS	PG36	47	25~31	15	58/50	10
SJ-PG36-25-SS	PG36	47	18~25	15	58/50	10
SJ-PG42-41-SS	PG42	54	33~41	15	60/60	10
SJ-PG42-33-SS	PG42	54	25~33	15	60/60	10
SJ-PG48-41-SS	PG48	59.3	33~41	15	71/65	10
SJ-PG48-44-SS	PG48	59.3	36~44	15	71/65	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G (PF)	Φ mm	mm	mm	nut/cap mm	PCS
SJ-G1/4-08-SS	G1/4	13.15	4~8	9	17/17	50
SJ-G3/8-10-SS	G3/8	16.66	6~10	9.5	21/21	50
SJ-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
SJ-G1/2-12-SS	G1/2	20.99	7~12	12	24/26	50
SJ-G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
SJ-G3/4-16-SS	G3/4	26.44	12~16	12	30/31	50
SJ-G1-25-SS	G1	33.25	18~25	15	38/40	20
SJ-G1-22-SS	G1	33.25	17~22	15	38/40	20
SJ-G1-1/4-31-SS	G1-1/4	41.91	25~31	15	48/50	10
SJ-G1-1/4-25-SS	G1-1/4	41.91	18~25	15	48/50	10
SJ-G1-1/2-41-SS	G1-1/2	47.8	33~41	15	55/60	10
SJ-G1-1/2-31-SS	G1-1/2	47.8	25~31	15	55/50	10
SJ-G2-41-SS	G2	59.61	33~41	15	71/65	1
SJ-NPT1/4-08-SS	NPT1/4	13.15	4~8	9	17	50
SJ-NPT3/8-10-SS	NPT3/8	17.05	6~10	10	21	50
SJ-NPT1/2-14-SS	NPT1/2	21.22	8~14	13	26	50
SJ-NPT1/2-12-SS	NPT1/2	21.22	7~12	11	26	50
SJ-NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
SJ-NPT3/4-16-SS	NPT3/4	26.56	12~16	13	31	50
SJ-NPT1-25-SS	NPT1	33.23	18~25	15	40	20
SJ-NPT1-22-SS	NPT1	33.23	17~22	15	40	20
SJ-NPT1-1/4-31-SS	NPT1-1/4	41.98	25~31	15	50	10
SJ-NPT1-1/4-25-SS	NPT1-1/4	41.98	18~25	15	50	10
SJ-NPT1-1/2-41-SS	NPT1-1/2	48.05	33~41	15	60	10
SJ-NPT1-1/2-31-SS	NPT1-1/2	48.05	25~31	15	50	10
SJ-NPT2-41-SS	NPT2	60.09	33~41	15	65	10

EMC型-防磁波不锈钢防水接头

EMC style stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多爪式防磁波片设计, 紫铜材质制成, 具有防电磁干扰, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

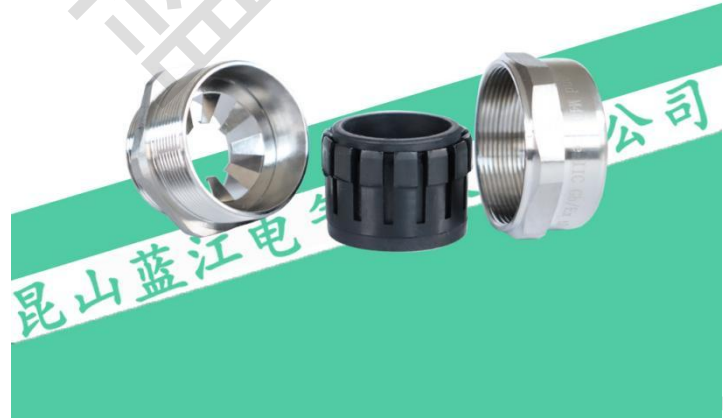

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Multi claw anti magnetic wave plate design, made of purple copper material, with characteristics of anti electromagnetic interference, high protection level, strong tensile strength, etc

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG10-06-SS	M10×1 (1.5)	10	3~6	7	14/14	100
EMC-MG12-08-SS	M12×1.5	12	4~8	9	15/17	50
EMC-MG12-05-SS	M12×1.5	12	3~5	9	15/17	50
EMC-MG16S-08-SS	M16×1.5	16	4~8	9.5	20/17	50
EMC-MG16-10-SS	M16×1.5	16	6~10	9.5	20/21	50
EMC-MG16-07-SS	M16×1.5	16	4~7	9.5	20/21	50
EMC-MG18-10-SS	M18×1.5	18	6~10	9.5	21/21	50
EMC-MG20S-12-SS	M20×1.5	20	7~12	12	24/24	50
EMC-MG20S-09-SS	M20×1.5	20	5~9	12	24/24	50
EMC-MG20-14-SS	M20×1.5	20	8~14	12	24/26	50
EMC-MG22-14-SS	M22×1.5	22	8~14	12	26/26	50
EMC-MG24-14-SS	M24×1.5	24	8~14	10.5	28/26	50
EMC-MG25-18-SS	M25×1.5	25	13~18	12	30/31	50
EMC-MG25-16-SS	M25×1.5	25	11~16	12	30/31	50
EMC-MG27-18-SS	M27×1.5 (2)	27	13~18	12	30/31	50
EMC-MG30-18-SS	M30×1.5 (2)	30	13~18	12.5	34/31	50
EMC-MG32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
EMC-MG32-22-SS	M32×1.5	32	16~22	12.5	38/40	20
EMC-MG33-25-SS	M33×2.0	33	18~25	14.5	38/40	20
EMC-MG36-25-SS	M36×1.5 (2)	36	18~25	13	42/40	20
EMC-MG40-31-SS	M40×1.5	40	25~31	14	48/50	10
EMC-MG40-25-SS	M40×1.5	40	18~25	14	48/50	10
EMC-MG42-31-SS	M42×2.0	42	25~31	15	48/50	10
EMC-MG48-31-SS	M48×2.0	48	25~31	15	58/50	10
EMC-MG50-41-SS	M50×1.5	50	33~41	15	58/60	10
EMC-MG50-33-SS	M50×1.5	50	26~33	15	58/60	10
EMC-MG60-44-SS	M60×2.0	60	36~44	15	71/65	10
EMC-MG63-44-SS	M63×1.5	63	36~44	15	71/65	10
EMC-MG63-54-SS	M63×1.5	63	46~54	15	71/76	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-PG7-08-SS	PG7	12.5	4~8	9	15/17	50
EMC-PG9-08-SS	PG9	15.2	4~8	9	17/17	50
EMC-PG11-10-SS	PG11	18.6	6~10	9.5	21/21	50
EMC-PG13.5-12-SS	PG13.5	20.4	7~12	10.5	24/24	50
EMC-PG16-14-SS	PG16	22.5	8~14	12	26/26	50
EMC-PG19-14-SS	PG19	22.5	8~14	10.5	28/26	50
EMC-PG21-18-SS	PG21	28.3	13~18	12	32/31	50
EMC-PG29-25-SS	PG29	37	18~25	12.5	40/40	20
EMC-PG36-31-SS	PG36	47	25~31	15	58/50	10
EMC-PG42-41-SS	PG42	54	33~41	15	60/60	10
EMC-PG48-44-SS	PG48	59.3	36~44	15	71/65	10
EMC-G1/4-08-SS	G1/4	13.15	4~8	9	17/17	50
EMC-G3/8-10-SS	G3/8	16.66	6~10	9.5	21/21	50
EMC-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
EMC-G1/2-12-SS	G1/2	20.99	7~12	12	24/24	50
EMC-G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
EMC-G1-25-SS	G1	33.25	18~25	15	38/40	20
EMC-G1-1/4-31-SS	G1-1/4	41.91	25~31	15	48/50	10
EMC-G1-1/2-31-SS	G1-1/2	47.8	25~31	15	55/50	10
EMC-G1-1/2-41-SS	G1-1/2	47.8	33~41	15	55/60	10
EMC-G2-44-SS	G2	59.61	36~44	15	71/65	1
EMC-NPT1/4-08-SS	NPT1/4	13.15	4~8	9	17	50
EMC-NPT3/8-10-SS	NPT3/8	17.05	6~10	10	21	50
EMC-NPT1/2-14-SS	NPT1/2	21.22	8~14	13	26	50
EMC-NPT1/2-12-SS	NPT1/2	21.22	7~12	11	24	50
EMC-NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
EMC-NPT1-25-SS	NPT1	33.23	18~25	15	40	20
EMC-NPT1-1/4-31-SS	NPT1-1/4	41.98	25~31	15	50	10
EMC-NPT1-1/2-31-SS	NPT1-1/2	48.05	25~31	15	50	10
EMC-NPT1-1/2-41-SS	NPT1-1/2	48.05	33~41	15	60	10
EMC-NPT2-44-SS	NPT2	60.09	36~44	15	65	10

KEMC型-铠装防磁波不锈钢接头

KEMC style stainless steel armor cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 压环式防磁波设计, 同时适用于铠装电缆, 具有防电磁干扰, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

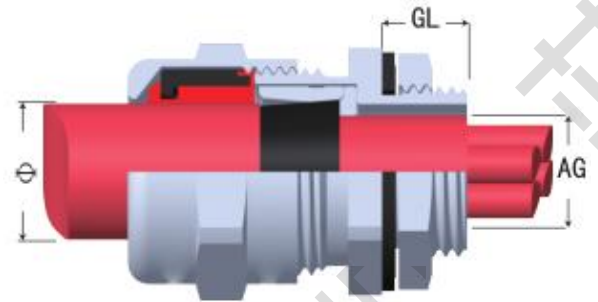

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Pressure ring anti magnetic wave design, suitable for armored cables, with anti electromagnetic interference, high protection level, strong tensile strength and other characteristics

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装
Product model	Thread size	Hole size	Cable range	Thread length	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	PCS
KEMC-M16-10-SS	M16×1.5	16	6~10	9	50
KEMC-M18-10-SS	M18×1.5	18	6~10	9	50
KEMC-M20-10-SS	M20×1.5	20	6~10	10	50
KEMC-M20-14-SS	M20×1.5	20	8~14	10	50
KEMC-M20-16-SS	M20×1.5	20	11~16	10	50
KEMC-M20-18-SS	M20×1.5	20	13~18	10	50
KEMC-M20-20-SS	M20×1.5	20	15~20	10	50
KEMC-M22-14-SS	M22×1.5	20	8~14	10	50
KEMC-M24-14-SS	M22×1.5	20	8~14	10	50
KEMC-M25-14-SS	M25×1.5	25	8~14	12	20
KEMC-M25-16-SS	M25×1.5	25	11~16	12	20
KEMC-M25-18-SS	M25×1.5	25	13~18	12	20
KEMC-M25-21-SS	M25×1.5	25	16~21	12	20
KEMC-M25-24-SS	M25×1.5	25	17~24	12	20
KEMC-M27-18-SS	M27×1.5/2	27	13~18	12	20
KEMC-M30-21-SS	M30×1.5/2	30	16~21	12	20
KEMC-M32-25-SS	M32×1.5	32	18~25	12	10
KEMC-M32-28-SS	M32×1.5	32	20~28	12	10
KEMC-M36-25-SS	M36×1.5/2	32	18~25	12	10
KEMC-M40-35-SS	M40×1.5	40	26~35	15	10
KEMC-M40-38-SS	M40×1.5	40	31~38	15	10
KEMC-M42-35-SS	M42×2.0	42	26~35	15	10
KEMC-M48-38-SS	M48×2.0	48	31~38	15	10
KEMC-M50-41-SS	M50×1.5	50	34~41	15	5
KEMC-M50-44-SS	M50×1.5	50	37~44	15	5
KEMC-M63-50-SS	M63×1.5	63	40~50	18	1
KEMC-M63-55-SS	M63×1.5	63	43~55	18	1
KEMC-M75-68-SS	M75×2.0	63	54~68	18	1
KEMC-M90-78-SS	M75×2.0	63	65~78	18	1

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装
Product model	Thread size	Hole size	Cable range	Thread length	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	PCS
KEMC-G1/2-14-SS	G1/2	20.99	8~14	10	50
KEMC-G1/2-18-SS	G1/2	20.99	13~18	10	50
KEMC-G1/2-21-SS	G1/2	20.99	16~21	10	50
KEMC-G3/4-18-SS	G3/4	26.44	13~18	12	20
KEMC-G3/4-21-SS	G3/4	26.44	16~21	12	20
KEMC-G3/4-24-SS	G3/4	26.44	17~24	12	20
KEMC-G1-25-SS	G1	33.25	18~25	12	10
KEMC-G1-28-SS	G1	33.25	20~28	12	10
KEMC-G1-1/4-35-SS	G1-1/4	41.91	26~35	15	10
KEMC-G1-1/4-38-SS	G1-1/4	41.91	31~38	15	10
KEMC-G1-1/2-41-SS	G1-1/2	47.8	34~41	15	5
KEMC-G1-1/2-44-SS	G1-1/2	47.8	37~44	15	5
KEMC-G2-50-SS	G2	59.61	40~50	18	1
KEMC-G2-55-SS	G2	59.61	43~55	18	1
KEMC-NPT1/2-14-SS	NPT1/2	20.99	8~14	10	50
KEMC-NPT1/2-18-SS	NPT1/2	20.99	13~18	10	50
KEMC-NPT1/2-21-SS	NPT1/2	20.99	16~21	10	50
KEMC-NPT3/4-18-SS	NPT3/4	26.44	13~18	12	20
KEMC-NPT3/4-21-SS	NPT3/4	26.44	16~21	12	20
KEMC-NPT3/4-24-SS	NPT3/4	26.44	17~24	12	20
KEMC-NPT1-25-SS	NPT1	33.25	18~25	12	10
KEMC-NPT1-28-SS	NPT1	33.25	20~28	12	10
KEMC-NPT1-1/4-35-SS	NPT1-1/4	41.91	26~35	15	10
KEMC-NPT1-1/4-38-SS	NPT1-1/4	41.91	31~38	15	10
KEMC-NPT1-1/2-41-SS	NPT1-1/2	47.8	34~41	15	5
KEMC-NPT1-1/2-44-SS	NPT1-1/2	47.8	37~44	15	5
KEMC-NPT2-50-SS	NPT2	59.61	40~50	18	1
KEMC-NPT2-55-SS	NPT2	59.61	43~55	18	1

防折弯不锈钢电缆防水接头

Stress relief stainless steel cable gland

产品材料：304材质，可选316和316L

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：本产品为防水接头配合耐扭弹簧组合而成，

具有保护电缆耐折弯，防护等级高，抗拉力强等特性

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：默认不附螺母，如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread



Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is composed of a cable gland combined with a torsion resistant spring, which has the characteristics of protecting the cable from bending, high protection level, and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

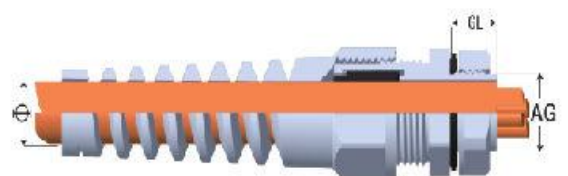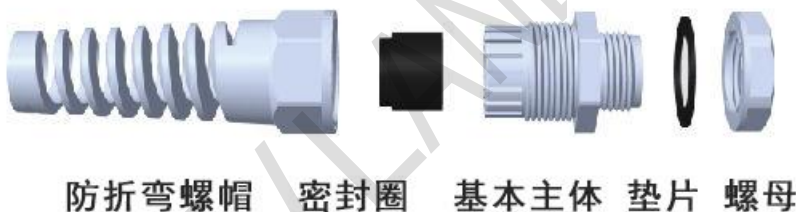

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-P-06-SS	M12×1.5	12	3~6	7	14	20
MG16-P-08-SS	M16×1.5	16	4~8	7	18	20
MG18-P-10-SS	M18×1.5	18	6~10	8	20	20
MG20-P-14-SS	M20×1.5	20	8~14	8	22	20
MG20-P-12-SS	M20×1.5	20	8~12	8	24	20
MG22-P-14-SS	M22×1.5	22	8~14	8	24	20
MG25-P-18-SS	M25×1.5	25	13~18	9	27	10
MG27-P-18-SS	M27×1.5	27	13~18	9	30	10
MG30-P-18-SS	M30×1.5	30	13~18	10	32	10
MG32-P-25-SS	M32×1.5	32	18~25	10	34	10
PG7-P-06-SS	PG7	12.5	3~6	7	14	20
PG9-P-08-SS	PG9	15.2	4~8	7	18	20
PG11-P-10-SS	PG11	18.6	6~10	8	20	20
PG13.5-P-12-SS	PG13.5	20.5	8~12	8	24	20
PG16-P-14-SS	PG16	22.5	8~14	8	24	20
PG21-P-18-SS	PG21	28.3	13~18	9	27	10
PG29-P-25-SS	PG29	37	18~25	10	34	10
G1/4-P-06-SS	G1/4	13.15	3~6	7	14	20
G3/8-P-10-SS	G3/8	16.66	6~10	8	20	20
G1/2-P-12-SS	G1/2	20.99	8~12	8	24	20
G1/2-P-14-SS	G1/2	20.99	8~14	8	24	20
G3/4-P-18-SS	G3/4	26.44	13~18	9	27	10
G1-P-25-SS	G1	33.23	18~25	10	34	10

硅胶不锈钢电缆防水接头

Silicone stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 其他螺纹接受定制

产品特性: 符合CE, IP68

温度测试: -20℃~180℃, 短时可达220℃

设计特点: 锥形硅胶密封圈设计, 耐高温, 防护等级高

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term 220 ° C

Design Features: Silicone sealing ring, high temperature resistance, high protection level

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12C-06-SS	M12×1.5	12	3~6	7	17	50
MG16C-08-SS	M16×1.5	16	5~8	8	18	50
MG20C-12-SS	M20×1.5	20	10~12	8	22	50

耐高温不锈钢电缆防水接头

High temperature stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP68

温度测试: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$, 短时可达 220°C

设计特点: 本产品采用改性硅橡胶制成, 具有耐高温, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

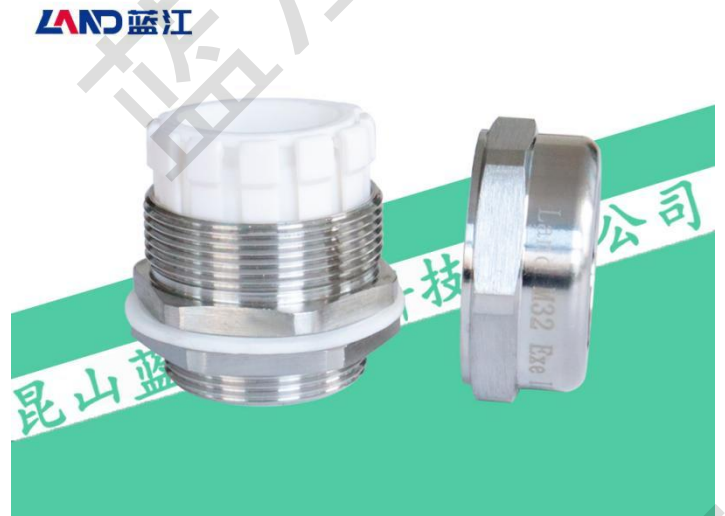

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68

Temperature test: -20°C to 180°C , short-term up to 220°C

Design Features: This product is made of modified silicone rubber, which has the characteristics of high temperature resistance, high protection level, and strong tensile strength. The rubber and clamping claws are both white.

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

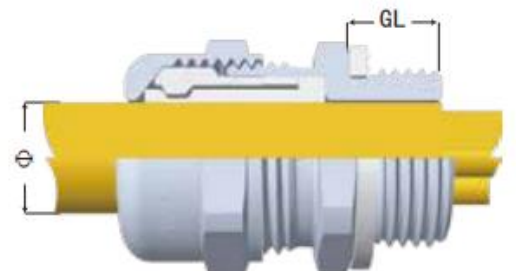

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12-08-HT-SS	M12×1.5	12	4~8	9	15/17	50
MG14-08-HT-SS	M14×1.5	14	4~8	9	17/17	50
MG16S-08-HT-SS	M16×1.5	16	4~8	9.5	20/17	50
MG16-10-HT-SS	M16×1.5	16	6~10	9.5	20/21	50
MG18-10-HT-SS	M18×1.5	18	6~10	9.5	21/21	50
MG20S-12-HT-SS	M20×1.5	20	7~12	12	24/24	50
MG20-14-HT-SS	M20×1.5	20	8~14	12	24/26	50
MG22-14-HT-SS	M22×1.5	22	8~14	12	26/26	50
MG24-14-HT-SS	M24×1.5	24	8~14	10.5	28/26	50
MG25-18-HT-SS	M25×1.5	25	13~18	12	30/31	50
MG27-18-HT-SS	M27×1.5 (2)	27	13~18	12	30/31	50
MG30-18-HT-SS	M30×1.5 (2)	30	13~18	12.5	34/31	50
MG32-25-HT-SS	M32×1.5	32	18~25	12.5	38/40	20
MG40-31-HT-SS	M40×1.5	40	25~31	14	48/50	10
MG50-41-HT-SS	M50×1.5	50	33~41	15	58/60	10
MG63-54-HT-SS	M63×1.5	63	46~54	15	71/76	10
PG7-08-HT-SS	PG7	12.5	4~8	9	15/17	50
PG9-08-HT-SS	PG9	15.2	4~8	9	17/17	50
PG11-10-HT-SS	PG11	18.6	6~10	9.5	21/21	50
PG13.5-12-HT-SS	PG13.5	20.4	7~12	10.5	24/24	50
PG13.5-14-HT-SS	PG13.5	20.4	8~14	10.5	24/26	50
PG16-14-HT-SS	PG16	22.5	8~14	12	26/26	50
PG21-18-HT-SS	PG21	28.3	13~18	12	32/31	50
PG29-25-HT-SS	PG29	37	18~25	12.5	40/40	20
PG36-31-HT-SS	PG36	47	25~31	15	58/50	10
PG42-41-HT-SS	PG42	54	33~41	15	60/60	10
PG48-54-HT-SS	PG48	59.3	44~54	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
G1/4-08-HT-SS	G1/4	13.15	4~8	9	17/17	50
G3/8-10-HT-SS	G3/8	16.66	6~10	9.5	21/21	50
G1/2-12-HT-SS	G1/2	20.99	7~12	12	24/24	50
G1/2-14-HT-SS	G1/2	20.99	8~14	12	24/26	50
G3/4-18-HT-SS	G3/4	26.44	13~18	12	30/31	50
G1-25-HT-SS	G1	33.25	18~25	15	38/40	20
G1-1/4-31-HT-SS	G1-1/4	41.91	25~31	15	48/50	10
G1-1/2-31-HT-SS	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-41-HT-SS	G1-1/2	47.8	33~41	15	55/60	10
G2-54-HT-SS	G2	59.61	47~54	15	71/76	1
NPT1/4-08-HT-SS	NPT1/4	13.15	4~8	9	17	50
NPT3/8-10-HT-SS	NPT3/8	17.05	6~10	10	21	50
NPT1/2-12-HT-SS	NPT1/2	21.22	7~12	13	26	50
NPT1/2-14-HT-SS	NPT1/2	21.22	8~14	13	26	50
NPT3/4-18-HT-SS	NPT3/4	26.56	13~18	13	31	50
NPT1-25-HT-SS	NPT1	33.23	18~25	15	40	20
NPT1-1/4-31-HT-SS	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/2-31-HT-SS	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-41-HT-SS	NPT1-1/2	48.05	33~41	15	60	10
NPT2-54-HT-SS	NPT2	60.09	44~54	15	76	10

阻燃不锈钢电缆防水接头

Flame retardant stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-0

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本产品采用改性阻燃橡胶制成, 具有防火阻燃, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-0

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of modified flame-retardant rubber, which has the characteristics of fire resistance, high protection level, and strong tensile strength. The rubber is red and the clamping claws are black

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12-08-V0-SS	M12 $\times$ 1.5	12	4~8	9	15/17	50
MG16S-08-V0-SS	M16 $\times$ 1.5	16	4~8	9.5	20/17	50
MG16-10-V0-SS	M16 $\times$ 1.5	16	6~10	9.5	20/21	50
MG18-10-V0-SS	M18 $\times$ 1.5	18	6~10	9.5	21/21	50
MG20S-12-V0-SS	M20 $\times$ 1.5	20	7~12	12	24/24	50
MG20-14-V0-SS	M20 $\times$ 1.5	20	8~14	12	24/26	50
MG20-11-V0-SS	M20 $\times$ 1.5	20	6~11	12	24/26	50
MG22-14-V0-SS	M22 $\times$ 1.5	22	8~14	12	26/26	50
MG22-11-V0-SS	M22 $\times$ 1.5	22	6~11	12	26/26	50
MG24-14-V0-SS	M24 $\times$ 1.5	24	8~14	10.5	28/26	50
MG24-11-V0-SS	M24 $\times$ 1.5	24	6~11	10.5	28/26	50
MG25-18-V0-SS	M25 $\times$ 1.5	25	13~18	12	30/31	50
MG25-16-V0-SS	M25 $\times$ 1.5	25	11~16	12	30/31	50
MG27-18-V0-SS	M27 $\times$ 1.5 (2)	27	13~18	12	30/31	50
MG30-18-V0-SS	M30 $\times$ 1.5 (2)	30	13~18	12.5	34/31	50
MG32-25-V0-SS	M32 $\times$ 1.5	32	18~25	12.5	38/40	20
MG32-22-V0-SS	M32 $\times$ 1.5	32	16~22	12.5	38/40	20
MG40-31-V0-SS	M40 $\times$ 1.5	40	25~31	14	48/50	10
MG50-41-V0-SS	M50 $\times$ 1.5	50	33~41	15	58/60	10
MG63-54-V0-SS	M63 $\times$ 1.5	63	46~54	15	71/76	10
PG7-08-V0-SS	PG7	12.5	4~8	9	15/17	50
PG9-08-V0-SS	PG9	15.2	4~8	9	17/17	50
PG11-10-V0-SS	PG11	18.6	6~10	9.5	21/21	50
PG13.5-12-V0-SS	PG13.5	20.4	7~12	10.5	24/26	50
PG13.5-14-V0-SS	PG13.5	20.4	8~14	10.5	24/26	50
PG16-14-V0-SS	PG16	22.5	8~14	12	26/26	50
PG16-12-V0-SS	PG16	22.5	7~12	12	26/26	50
PG21-18-V0-SS	PG21	28.3	13~18	12	32/31	50
PG21-16-V0-SS	PG21	28.3	11~16	12	32/31	50
PG29-25-V0-SS	PG29	37	18~25	12.5	40/40	20
PG29-22-V0-SS	PG29	37	18~25	12.5	40/40	20
PG36-31-V0-SS	PG36	47	25~31	15	58/50	10
PG42-41-V0-SS	PG42	54	33~41	15	60/60	10
PG48-54-V0-SS	PG48	59.3	44~54	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4-08-V0-SS	G1/4	13.15	4~8	9	17/17	50
G3/8-10-V0-SS	G3/8	16.66	6~10	9.5	21/21	50
G1/2-14-V0-SS	G1/2	20.99	8~14	12	24/26	50
G1/2-11-V0-SS	G1/2	20.99	6~11	12	24/26	50
G1/2-12-V0-SS	G1/2	20.99	7~12	12	24/24	50
G3/4-18-V0-SS	G3/4	26.44	13~18	12	30/31	50
G3/4-16-V0-SS	G3/4	26.44	11~16	12	30/31	50
G1-25-V0-SS	G1	33.25	18~25	15	38/40	20
G1-22-V0-SS	G1	33.25	16~22	15	38/40	20
G1-1/4-31-V0-SS	G1-1/4	41.91	25~31	15	48/50	10
G1-1/2-31-V0-SS	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-41-V0-SS	G1-1/2	47.8	25~31	15	55/60	10
G2-54-V0-SS	G2	59.61	47~54	15	71/76	1
NPT1/4-08-V0-SS	NPT1/4	13.15	4~8	9	17	50
NPT3/8-10-V0-SS	NPT3/8	17.05	6~10	10	21	50
NPT1/2-14-V0-SS	NPT1/2	21.22	8~14	13	26	50
NPT1/2-11-V0-SS	NPT1/2	21.22	6~11	13	26	50
NPT1/2-12-V0-SS	NPT1/2	21.22	7~12	13	26	50
NPT3/4-18-V0-SS	NPT3/4	26.56	13~18	13	31	50
NPT3/4-16-V0-SS	NPT3/4	26.56	11~16	13	31	50
NPT1-25-V0-SS	NPT1	33.23	18~25	15	40	20
NPT1-22-V0-SS	NPT1	33.23	16~22	15	40	20
NPT1-1/4-31-V0-SS	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/2-31-V0-SS	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-31-V0-SS	NPT1-1/2	48.05	25~31	15	60	10
NPT2-54-V0-SS	NPT2	60.09	44~54	15	76	10

90度不锈钢电缆防水接头

90 degree stainless steel elbow

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 英制G(PF)牙, 美制NPT牙

产品特性: 符合CE, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C


设计特点: 本款产品采用90度弯头一体成型铸造, 使得转角穿线更加便捷, 防护等级高, 抗拉力强

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通等

订购说明: 默认不附螺母, 如需316及316L请另外说明

部分型号需要定制, 具体交期联系客户经理

LAND 蓝江

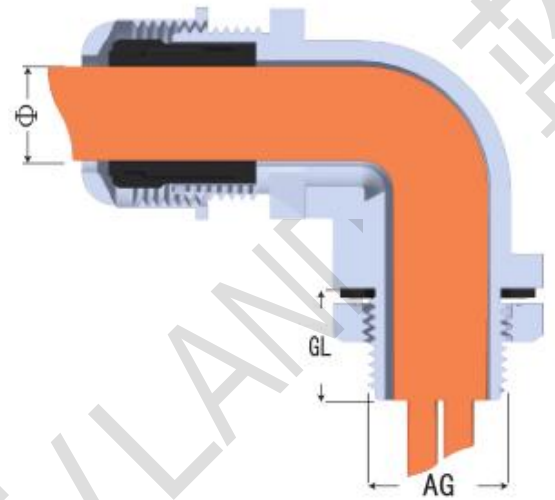

Product materials: SUS304, Optional 316 or 316L

Thread Standard: M thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product adopts a 90 degree elbow integrated molding casting, making corner threading more convenient, with high protection level and strong tensile strength

Application:Electrical, ship, motor, mechanical equipment, rail transit, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify, Some models require customization, please contact the customer manager for specific delivery time

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
SW90-M20-14-SS	M20×1.5	20	8~14	12	24/26	50
SW90-M20-12-SS	M20×1.5	20	7~12	12	24/26	50
SW90-M20-09-SS	M20×1.5	20	5~9	12	24/26	50
SW90-M20-06-SS	M20×1.5	20	3~6	12	24/26	50
SW90-M25-18-SS	M25×1.5	25	13~18	12	30/31	50
SW90-M25-16-SS	M25×1.5	25	12~16	12	30/31	50
SW90-M25-14-SS	M25×1.5	25	8~14	12	30/31	50
SW90-M25-10-SS	M25×1.5	25	6~10	12	30/31	50
SW90-M32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
SW90-M32-22-SS	M32×1.5	32	17~22	12.5	38/40	20
SW90-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
SW90-G1/2-12-SS	G1/2	20.99	7~12	12	24/26	50
SW90-G1/2-09-SS	G1/2	20.99	5~9	12	24/26	50
SW90-G1/2-06-SS	G1/2	20.99	3~6	12	24/26	50
SW90-G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
SW90-G3/4-16-SS	G3/4	26.44	12~16	12	30/31	50
SW90-G3/4-14-SS	G3/4	26.44	8~14	12	30/31	50
SW90-G3/4-10-SS	G3/4	26.44	6~10	12	30/31	50
SW90-G1-25-SS	G1	33.25	18~25	15	38/40	20
SW90-G1-22-SS	G1	33.25	17~22	15	38/40	20
SW90-NPT1/2-14-SS	NPT1/2	21.22	8~14	13	26	50
SW90-NPT1/2-12-SS	NPT1/2	21.22	7~12	11	26	50
SW90-NPT1/2-09-SS	NPT1/2	21.22	5~9	11	26	50
SW90-NPT1/2-06-SS	NPT1/2	21.22	3~6	11	26	50
SW90-NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
SW90-NPT3/4-16-SS	NPT3/4	26.56	12~16	13	31	50
SW90-NPT3/4-14-SS	NPT3/4	26.56	8~14	13	31	50
SW90-NPT3/4-10-SS	NPT3/4	26.56	6~10	13	31	50
SW90-NPT1-25-SS	NPT1	33.23	18~25	15	40	20
SW90-NPT1-22-SS	NPT1	33.23	17~22	15	40	20

LBEX系列-喇叭口铠装防爆填料函

LBEX Explosion-proof Armored cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品采用喇叭口出线设计, 内部为铠装夹紧装置, 可以采用单密封或双密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点。

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: 默认不附螺母, 如需316及316L请另外说明



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product adopts a horn mouth outlet design, with an armored clamping device inside. It can adopt a single seal or double seal structure, and has the characteristics of waterproof and explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
LBEX-M20-16-SS	M20×1.5	12~16	6~10	15	20
LBEX-M20-20-SS	M20×1.5	15~20	11~15	15	20
LBEX-M25-20-SS	M25×1.5	15~20	11~15	15	20
LBEX-M25-25-SS	M25×1.5	17~25	11~15	15	20
LBEX-M32-25-SS	M32×1.5	17~25	15~20	15	10
LBEX-M32-25-SS	M32×1.5	23~32	15~20	15	10
LBEX-M40-32-SS	M40×1.5	23~32	18~26	15	10
LBEX-M50-40-SS	M50×1.5	34~40	28~32	15	5
LBEX-M63-50-SS	M63×1.5	44~50	35~45	15	5
LBEX-G1/2-16-SS	G1/2	12~16	6~10	15	20
LBEX-G1/2-20-SS	G1/2	15~20	11~15	15	20
LBEX-G3/4-20-SS	G3/4	15~20	11~15	15	20
LBEX-G3/4-25-SS	G3/4	17~25	11~15	15	20
LBEX-G1-25-SS	G1	17~25	15~20	15	10
LBEX-G1-32-SS	G1	23~32	15~20	15	10
LBEX-G1-1/4-32-SS	G1-1/4	23~32	18~26	15	10
LBEX-G1-1/2-40-SS	G1-1/2	34~40	28~32	15	5
LBEX-G2-50-SS	G2	44~50	35~45	15	5
LBEX-NPT1/2-16-SS	NPT1/2	12~16	6~10	15	20
LBEX-NPT1/2-20-SS	NPT1/2	15~20	11~15	15	20
LBEX-NPT3/4-20-SS	NPT3/4	15~20	11~15	15	20
LBEX-NPT3/4-25-SS	NPT3/4	17~25	11~15	15	20
LBEX-NPT1-25-SS	NPT1	17~25	15~20	15	10
LBEX-NPT1-32-SS	NPT1	23~32	15~20	15	10
LBEX-NPT1-1/4-32-SS	NPT1-1/4	23~32	18~26	15	10
LBEX-NPT1-1/2-40-SS	NPT1-1/2	34~40	28~32	15	5
LBEX-NPT2-50-SS	NPT2	44~50	35~45	15	5

DEX2系列-单密封铠装防爆填料函

DEX2 Explosion-proof Armored cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品胶泥型单密封出线设计, 内部为铠装夹紧装置, 采用单密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备等

订购说明: 默认不附螺母, 如需316及316L请另外说明

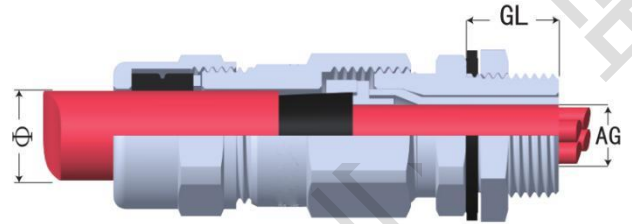

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a single sealed lead out design with adhesive mud type, and an armored clamping device inside. It adopts a single sealed structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
DEX2-M20-16-SS	M20×1.5	12~16	6~10	15	20
DEX2-M20-20-SS	M20×1.5	15~20	11~15	15	20
DEX2-M25-20-SS	M25×1.5	15~20	11~15	15	20
DEX2-M25-25-SS	M25×1.5	17~25	11~15	15	20
DEX2-M32-25-SS	M32×1.5	17~25	15~20	15	10
DEX2-M32-25-SS	M32×1.5	23~32	15~20	15	10
DEX2-M40-32-SS	M40×1.5	23~32	18~26	15	10
DEX2-M50-40-SS	M50×1.5	34~40	28~32	15	5
DEX2-M63-50-SS	M63×1.5	44~50	35~45	15	5
DEX2-G1/2-16-SS	G1/2	12~16	6~10	15	20
DEX2-G1/2-20-SS	G1/2	15~20	11~15	15	20
DEX2-G3/4-20-SS	G3/4	15~20	11~15	15	20
DEX2-G3/4-25-SS	G3/4	17~25	11~15	15	20
DEX2-G1-25-SS	G1	17~25	15~20	15	10
DEX2-G1-32-SS	G1	23~32	15~20	15	10
DEX2-G1-1/4-32-SS	G1-1/4	23~32	18~26	15	10
DEX2-G1-1/2-40-SS	G1-1/2	34~40	28~32	15	5
DEX2-G2-50-SS	G2	44~50	35~45	15	5
DEX2-NPT1/2-16-SS	NPT1/2	12~16	6~10	15	20
DEX2-NPT1/2-20-SS	NPT1/2	15~20	11~15	15	20
DEX2-NPT3/4-20-SS	NPT3/4	15~20	11~15	15	20
DEX2-NPT3/4-25-SS	NPT3/4	17~25	11~15	15	20
DEX2-NPT1-25-SS	NPT1	17~25	15~20	15	10
DEX2-NPT1-32-SS	NPT1	23~32	15~20	15	10
DEX2-NPT1-1/4-32-SS	NPT1-1/4	23~32	18~26	15	10
DEX2-NPT1-1/2-40-SS	NPT1-1/2	34~40	28~32	15	5
DEX2-NPT2-50-SS	NPT2	44~50	35~45	15	5

SKZEX系列-双密封铠装防爆填料函

SKZEX Explosion-proof Armored cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品双密封圈出线锁紧设计, 内部为铠装夹紧装置, 采用双密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备等

订购说明: 默认不附螺母, 如需316及316L请另外说明

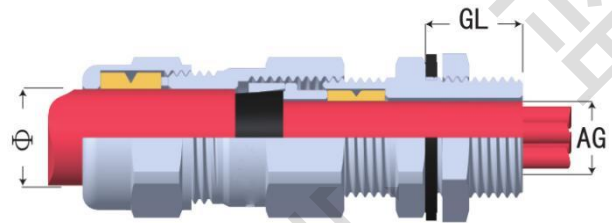

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a dual sealing ring locking design for the outgoing line, with an armored clamping device inside. It adopts a dual sealing structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
SKZEX-M20-16-SS	M20×1.5	12~16	6~10	15	20
SKZEX-M20-20-SS	M20×1.5	15~20	11~15	15	20
SKZEX-M25-20-SS	M25×1.5	15~20	11~15	15	20
SKZEX-M25-25-SS	M25×1.5	17~25	11~15	15	20
SKZEX-M32-25-SS	M32×1.5	17~25	15~20	15	10
SKZEX-M32-25-SS	M32×1.5	23~32	15~20	15	10
SKZEX-M40-32-SS	M40×1.5	23~32	18~26	15	10
SKZEX-M50-40-SS	M50×1.5	34~40	28~32	15	5
SKZEX-M63-50-SS	M63×1.5	44~50	35~45	15	5
SKZEX-G1/2-16-SS	G1/2	12~16	6~10	15	20
SKZEX-G1/2-20-SS	G1/2	15~20	11~15	15	20
SKZEX-G3/4-20-SS	G3/4	15~20	11~15	15	20
SKZEX-G3/4-25-SS	G3/4	17~25	11~15	15	20
SKZEX-G1-25-SS	G1	17~25	15~20	15	10
SKZEX-G1-32-SS	G1	23~32	15~20	15	10
SKZEX-G1-1/4-32-SS	G1-1/4	23~32	18~26	15	10
SKZEX-G1-1/2-40-SS	G1-1/2	34~40	28~32	15	5
SKZEX-G2-50-SS	G2	44~50	35~45	15	5
SKZEX-NPT1/2-16-SS	NPT1/2	12~16	6~10	15	20
SKZEX-NPT1/2-20-SS	NPT1/2	15~20	11~15	15	20
SKZEX-NPT3/4-20-SS	NPT3/4	15~20	11~15	15	20
SKZEX-NPT3/4-25-SS	NPT3/4	17~25	11~15	15	20
SKZEX-NPT1-25-SS	NPT1	17~25	15~20	15	10
SKZEX-NPT1-32-SS	NPT1	23~32	15~20	15	10
SKZEX-NPT1-1/4-32-SS	NPT1-1/4	23~32	18~26	15	10
SKZEX-NPT1-1/2-40-SS	NPT1-1/2	34~40	28~32	15	5
SKZEX-NPT2-50-SS	NPT2	44~50	35~45	15	5

JGKEX系列-接管式铠装防爆填料函

JGEX Explosion-proof Armored cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙



产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品内外丝接管式设计, 内部为铠装夹
紧装置, 可采用单密封或双密封结构, 具有防水防爆,
防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备等

订购说明: 默认不附螺母, 如需316及316L请另外说明

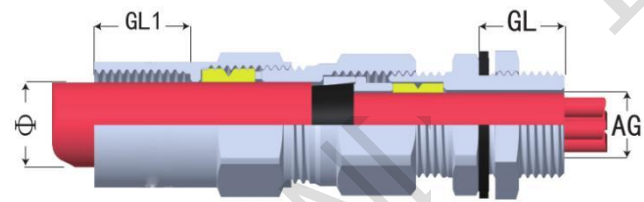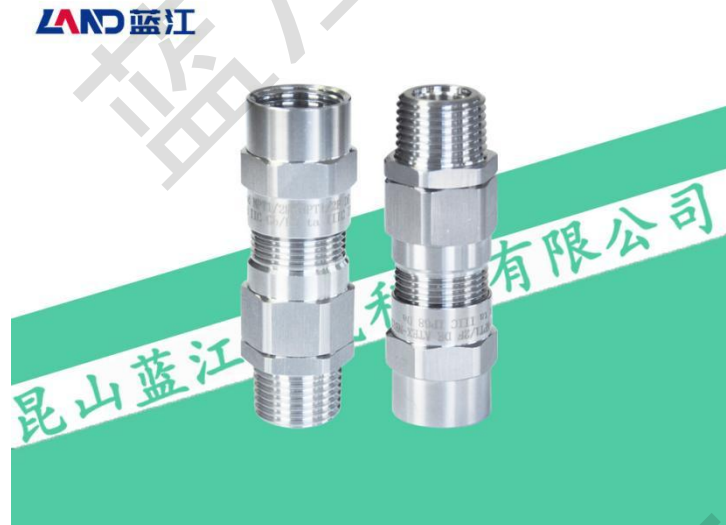

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features an inner and outer wire connection design, with an armored clamping device inside. It can adopt a single seal or double seal structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格		电缆范围/Cable range		螺纹长度	包装
	外螺纹	内螺纹	带铠电缆	内部电缆		
Product model	External thread	internal thread	Armored cable	Internal cable	Thread L	packaging
PN.			Φ mm	AG mm	GL mm	PCS
JGKEX-M20-16-SS	M20×1.5	M20×1.5	12~16	6~10	15	20
JGKEX-M25-20-SS	M25×1.5	M25×1.5	15~20	11~15	15	20
JGKEX-M32-25-SS	M32×1.5	M32×1.5	17~25	15~20	15	10
JGKEX-M40-32-SS	M40×1.5	M40×1.5	23~32	18~26	15	10
JGKEX-M50-40-SS	M50×1.5	M50×1.5	34~40	28~32	15	5
JGKEX-M63-50-SS	M63×1.5	M63×1.5	44~50	35~45	15	5
JGKEX-G1/2-16-SS	G1/2	G1/2	12~16	6~10	15	20
JGKEX-G3/4-20-SS	G3/4	G3/4	15~20	11~15	15	20
JGKEX-G1-25-SS	G1	G1	17~25	15~20	15	10
JGKEX-G1-1/4-32-SS	G1-1/4	G1-1/4	23~32	18~26	15	10
JGKEX-G1-1/2-40-SS	G1-1/2	G1-1/2	34~40	28~32	15	5
JGKEX-G2-50-SS	G2	G2	44~50	35~45	15	5
JGKEX-NPT1/2-16-SS	NPT1/2	NPT1/2	12~16	6~10	15	20
JGKEX-NPT3/4-20-SS	NPT3/4	NPT3/4	15~20	11~15	15	20
JGKEX-NPT1-25-SS	NPT1	NPT1	17~25	15~20	15	10
JGKEX-NPT1-1/4-32-SS	NPT1-1/4	NPT1-1/4	23~32	18~26	15	10
JGKEX-NPT1-1/2-40-SS	NPT1-1/2	NPT1-1/2	34~40	28~32	15	5
JGKEX-NPT2-50-SS	NPT2	NPT2	44~50	35~45	15	5

EXd1系列-隔爆不锈钢填料函

EXd1 Explosion-proof cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品本体与密封圈加长设计, 符合隔爆标准, 密封圈为硅胶, 本体为不锈钢, 安装便捷

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: 默认不附螺母, 如需316及316L请另外说明



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 05 ° C, short-term up to 120 ° C

Design Features: This product has an extended design for the body and sealing ring, which meets explosion-proof standards. The sealing ring is made of silicone and the body is made of stainless steel

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
Exd1-M20-14-SS	M20×1.5	20	8~14	15	26	20
Exd1-M25-16-SS	M25×1.5	25	8~16	15	30	20
Exd1-M25-20-SS	M25×1.5	25	10~20	15	38	20
Exd1-M32-20-SS	M32×1.5	32	10~20	18	38	10
Exd1-M32-25-SS	M32×1.5	32	10~25	18	46	10
Exd1-M40-25-SS	M40×1.5	40	10~25	18	46	5
Exd1-M40-32-SS	M40×1.5	40	14~32	18	50	5
Exd1-M50-32-SS	M50×1.5	50	14~32	18	50	5
Exd1-M50-41-SS	M50×1.5	50	17~41	18	62	5
Exd1-M63-41-SS	M63×1.5	63	17~41	18	62	1
Exd1-G1/2-14-SS	G1/2	20.95	8~14	15	26	20
Exd1-G3/4-16-SS	G3/4	26.44	8~16	15	30	20
Exd1-G3/4-20-SS	G3/4	26.44	10~20	15	38	20
Exd1-G1-20-SS	G1	33.2	10~20	18	38	10
Exd1-G1-25-SS	G1	33.1	10~25	18	46	10
Exd1-G1-1/4-25-SS	G1-1/4	41.9	10~25	18	46	5
Exd1-G1-1/4-32-SS	G1-1/4	41.9	14~32	18	50	5
Exd1-G1-1/2-32-SS	G1-1/2	47.8	14~32	18	50	5
Exd1-G1-1/2-41-SS	G1-1/2	47.8	17~41	18	62	5
Exd1-G2-41-SS	G2	59.6	17~41	18	62	1
Exd1-NPT1/2-14-SS	NPT1/2	20.95	8~14	15	26	20
Exd1-NPT3/4-16-SS	NPT3/4	26.44	8~16	15	30	20
Exd1-NPT3/4-20-SS	NPT3/4	26.44	10~20	15	38	20
Exd1-NPT1-20-SS	NPT1	33.5	10~20	18	38	10
Exd1-NPT1-25-SS	NPT1	33.5	10~25	18	46	10
Exd1-NPT1-1/4-25-SS	NPT1-1/4	42	10~25	18	46	5
Exd1-NPT1-1/4-32-SS	NPT1-1/4	42	14~32	18	50	5
Exd1-NPT1-1/2-32-SS	NPT1-1/2	48	14~32	18	50	5
Exd1-NPT1-1/2-41-SS	NPT1-1/2	48	17~41	18	62	5
Exd1-NPT2-41-SS	NPT2	60	17~41	18	62	1

EXd2系列-耐温防水不锈钢填料函

EXd2 High temperature waterproof cable gland


产品材料：默认304材质，可选316和316L

产品特性：符合CE， IP68

温度测试：-20℃～180℃，短时可达220℃

设计特点：锥形硅胶密封圈设计，内压迫紧密封锁紧电缆

订购说明：默认不附螺母，如需316及316L请另外说明

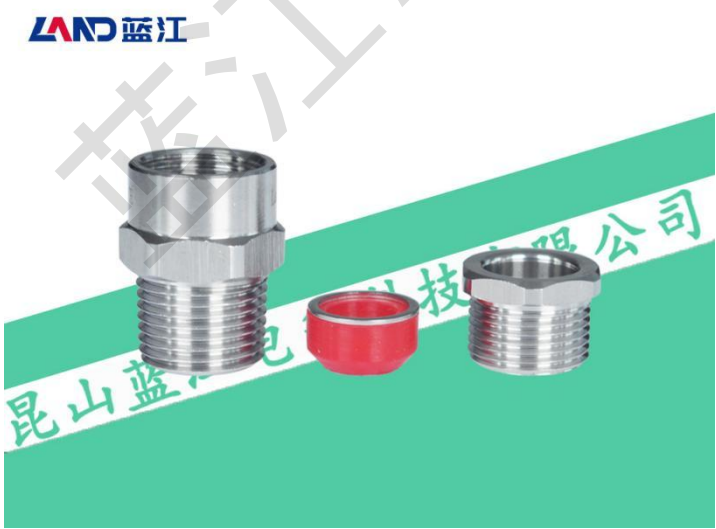

Product materials: SUS304, Optional 316 or 316L

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: Cone shaped silicone sealing ring design, internal compression tightly seals and locks the cable

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
Exd2-M20-14-SS	M20×1.5	20	8~14	15	30	50
Exd2-M20-12-SS	M20×1.5	20	7~12	15	26	50
Exd2-M20-08-SS	M20×1.5	20	4~8	15	26	50
Exd2-M20-06-SS	M20×1.5	20	3~6	15	26	50
Exd2-G1/2-14-SS	G1/2	20.95	8~14	15	30	50
Exd2-G1/2-12-SS	G1/2	20.95	7~12	15	30	50
Exd2-G1/2-08-SS	G1/2	20.95	4~8	15	26	50
Exd2-G1/2-06-SS	G1/2	20.95	3~6	15	26	50
Exd2-NPT1/2-14-SS	NPT1/2	20.95	8~14	15	30	50
Exd2-NPT1/2-12-SS	NPT1/2	20.95	7~12	15	26	50
Exd2-NPT1/2-08-SS	NPT1/2	20.95	4~8	15	26	50
Exd2-NPT1/2-06-SS	NPT1/2	20.95	3~6	15	26	50

TJ不锈钢船用夹紧填料函

TJ stainless steel marine stuffing box


产品材料：默认304材质，可选316和316L

产品特性：符合CE，IP65

温度测试：-40℃~105℃，短时可达120℃

设计特点：压紧式密封设计，不锈钢船用填料函

订购说明：默认不附螺母，如需316及316L请另外说明

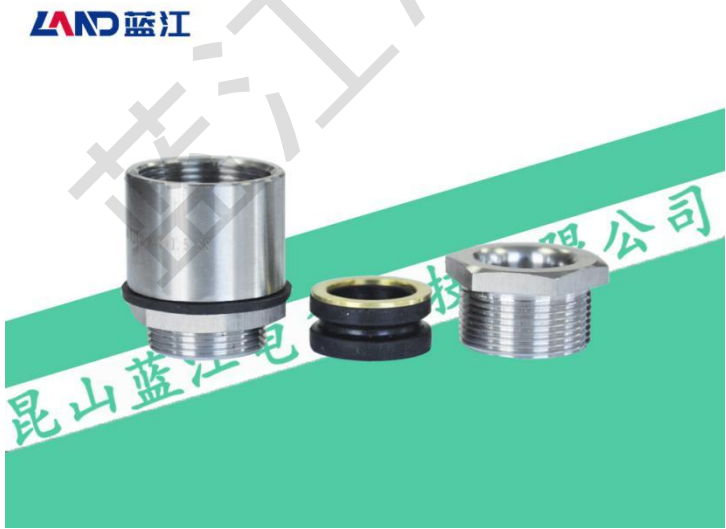

Product materials: SUS304, Optional 316 or 316L

Product Features: Compliant with CE, IP68

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: Compression sealing design, stainless steel marine stuffing box

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
TJ08-M14-SS	M14×1.0	14	5~7	10	18/18	50
TJ13-M18-SS	M18×1.0	18	9~12	11	24/24	50
TJ16-M22-SS	M22×1.0	22	11~15	12	27/28	20
TJ19-M27-SS	M27×1.5	27	14~18	14	32/32	20
TJ24-M30-SS	M30×1.5	30	18~23	14	38/38	20
TJ28-M36-SS	M36×2.0	36	23~27	14	45/45	10
TJ34-M42-SS	M42×2.0	42	27~33	14	50/50	10
TJ42-M52-SS	M52×2.0	52	33~41	14	62/60	5
TJ50-M58-SS	M58×2.0	58	33~49	20	65/70	5
TJ58-M68-SS	M68×2.0	68	33~57	20	85/80	1