

镀锌金属软管/单扣

Galvanized metal hose/Single buckle

品牌：蓝江/Land

材料：热镀锌钢带

结构：单扣

防腐：镀锌防腐处理

特性：本款镀锌金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，容易分割，防护及抗拉力一般



Brand: Land


Material: Hot dip galvanized steel strip

Structure: single buckle

Anti corrosion: Galvanized anti-corrosion treatment

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Single button: Low cost, easy to separate, average protection and tensile strength

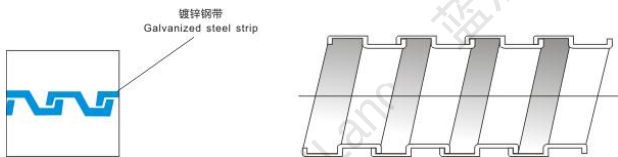

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSH-6	Φ 6	3/16"	8.2±0.3	40	200
JSH-8	Φ 8	1/4"	11.0±0.3	45	100
JSH-10	Φ 10	5/16"	13.5±0.3	55	100
JSH-13	Φ 13	3/8"	15.5±0.35	65	100
JSH-16	Φ 16	1/2"	20.0±0.4	85	100
JSH-20	Φ 20	3/4"	24.3±0.4	100	50
JSH-25	Φ 25	1"	30.3±0.45	115	50
JSH-32	Φ 32	1-1/4"	38.0±0.5	140	25
JSH-38	Φ 38	1-1/2"	45.0±0.6	160	25
JSH-51	Φ 51	2"	58.0±0.6	190	20
JSH-64	Φ 64	2 1/2"	72.5±2.0	280	20
JSH-75	Φ 75	3"	83.5±2.0	320	20
JSH-100	Φ 100	4"	108.5±3.0	380	10
JSH-125	Φ 125	5"	133.0±4.0	460	5
JSH-150	Φ 150	6"	157.0±5.0	500	5

镀锌金属软管/双扣

Galvanized metal hose/Double buckle

品牌：蓝江/Land

材料：热镀锌钢带

结构：双扣

防腐：镀锌防腐处理

特性：本款镀锌金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，正反拧都不脱钩，抗拉力极强

Brand: Land

Material: Hot dip galvanized steel strip

Structure: double buckle


Anti corrosion: Galvanized anti-corrosion treatment

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Double buckle: With a tight structure, it does not detach even when twisted forward or backward, and has extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSHK-10	Φ 10	5/16"	13.5±0.3	50	100
JSHK-13	Φ 13	3/8"	15.5±0.35	70	100
JSHK-16	Φ 16	1/2"	20.0±0.4	82.5	100
JSHK-20	Φ 20	3/4"	24.3±0.4	90	50
JSHK-25	Φ 25	1"	30.3±0.45	100	50
JSHK-32	Φ 32	1-1/4"	38.0±0.5	115	25
JSHK-38	Φ 38	1-1/2"	45.0±0.6	125	25
JSHK-51	Φ 51	2"	58.0±0.8	150	20

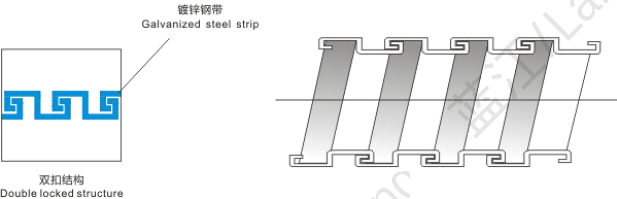

包塑镀锌金属软管/单扣

Plastic coated metal hose/Single buckle

品牌：蓝江/Land



材料：热镀锌钢带/外PVC原料

结构：单扣


温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

单扣：成本较低，防水绝缘，单型反扣不易折断

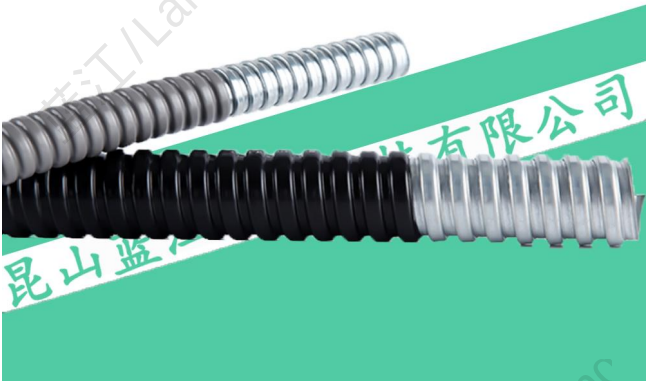

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Structure: single buckle

Temperature:- 10 ° C to 80 ° C,

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Single button: Low cost, good bending performance, and not easy to break

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JS-6B	Φ 6	3/16"	9.0±0.25	40	200
JS-8B	Φ 8	1/4"	11.8±0.3	45	100
JS-10B	Φ 10	5/16"	14.2±0.3	50	100
JS-13B	Φ 13	3/8"	16.5±0.35	70	100
JS-16B	Φ 16	1/2"	20.5±0.4	82.5	100
JS-20B	Φ 20	3/4"	25.7±0.4	90	50
JS-25B	Φ 25	1"	31.7±0.45	100	50
JS-32B	Φ 32	1-1/4"	39.5±0.5	115	25
JS-38B	Φ 38	1-1/2"	46.5±0.6	125	25
JS-51B	Φ 51	2"	60.0±0.8	150	20
JS-64B	Φ 64	2 1/2"	74.1±2.0	215	10
JS-75B	Φ 75	3"	85.1±2.0	240	10
JS-100B	Φ 100	4"	110.1±3.0	325	10
JS-125B	Φ 125	5"	136.0±4.0	460	5
JS-150B	Φ 150	6"	160.0±5.0	500	5

包塑镀锌金属软管/双扣

Plastic coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PVC原料

结构：双扣



温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，防水绝缘，抗拉力极强不脱钩

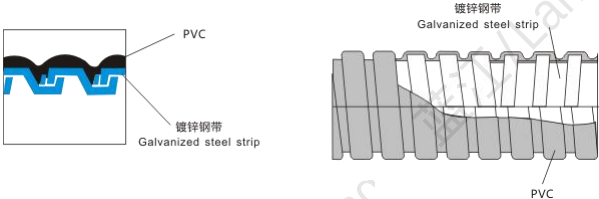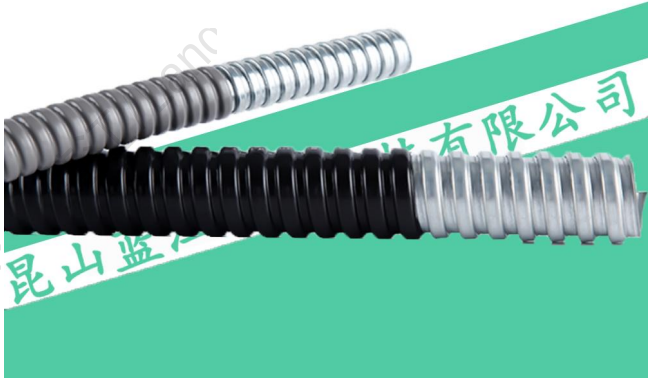

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Structure: Double buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Double buckle: Tight structure, lightweight, and extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B	Φ 25	1"	31.7±0.45	100	50
JSK-32B	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B	Φ 51	2"	60.0±0.8	150	20

PA包塑镀锌金属软管/双扣

PA coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PA原料

结构：双扣



温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，防水绝缘，抗拉力极强不脱钩

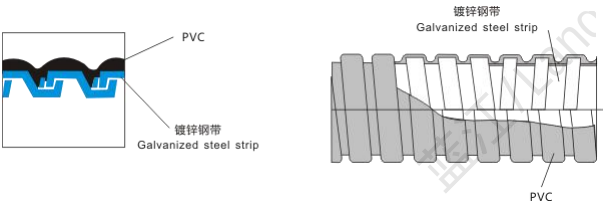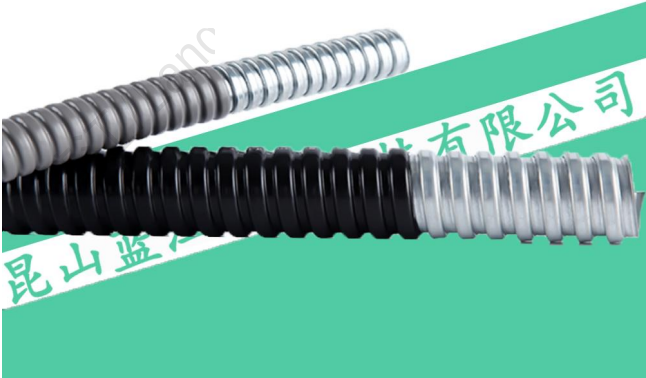

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Structure: Double buckle

Temperature:- 10 ° C to 100 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Double buckle: Tight structure, lightweight, and extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B/PA	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B/PA	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B/PA	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B/PA	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B/PA	Φ 25	1"	31.7±0.45	100	50
JSK-32B/PA	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B/PA	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B/PA	Φ 51	2"	60.0±0.8	150	20

PU包塑镀锌金属软管/双扣

PU coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PU原料

结构：双扣



温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，防水绝缘，抗拉力极强不脱钩

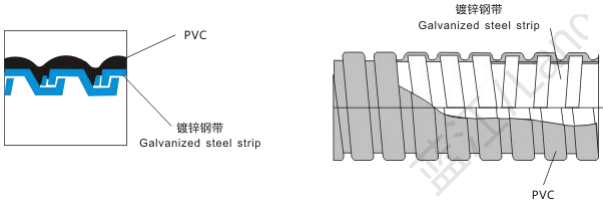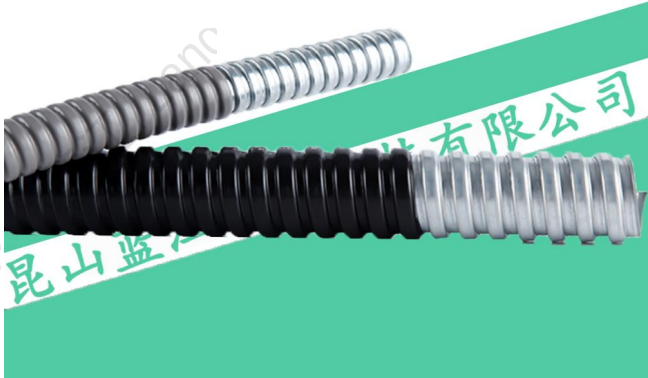

Brand: Land

Material: Hot dip galvanized steel strip/outer PU raw material

Structure: Double buckle

Temperature:- 10 ° C to 100 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Double buckle: Tight structure, lightweight, and extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B/PU	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B/PU	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B/PU	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B/PU	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B/PU	Φ 25	1"	31.7±0.45	100	50
JSK-32B/PU	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B/PU	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B/PU	Φ 51	2"	60.0±0.8	150	20

PE包塑镀锌金属软管/双扣

PE coated metal hose/Double buckle



品牌：蓝江/Land

材料：热镀锌钢带/外PE原料

结构：双扣



温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款镀锌金属软管具有良好的柔软与弯曲

性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，防水绝缘，抗拉力极强不脱钩

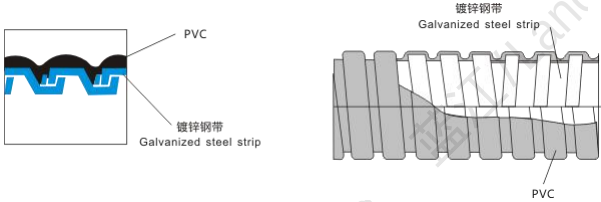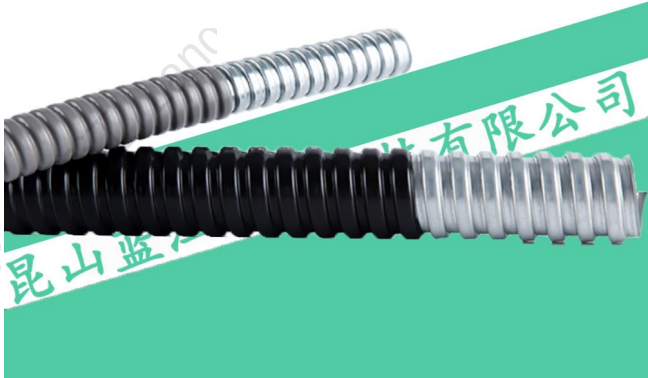

Brand: Land

Material: Hot dip galvanized steel strip/outer PE raw material

Structure: Double buckle

Temperature:- 10 ° C to 100 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, with a smooth internal structure and easy and fast threading

Double buckle: Tight structure, lightweight, and extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B/PE	Φ 10	5/16"	14.2±0.3	50	100
JSK-13B/PE	Φ 13	3/8"	16.5±0.35	70	100
JSK-16B/PE	Φ 16	1/2"	20.5±0.4	82.5	100
JSK-20B/PE	Φ 20	3/4"	25.7±0.4	90	50
JSK-25B/PE	Φ 25	1"	31.7±0.45	100	50
JSK-32B/PE	Φ 32	1-1/4"	39.5±0.5	115	25
JSK-38B/PE	Φ 38	1-1/2"	46.5±0.6	125	25
JSK-51B/PE	Φ 51	2"	60.0±0.8	150	20

平包塑金属软管/单扣

Flat plastic coated metal hose/Single buckle

品牌：蓝江/Land




材料：热镀锌钢带或不锈钢

防护：防水防尘

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款平包塑金属软管外表平滑，具有防水，绝缘，抗拉等特性，内部结构平滑，穿线便捷，反扣设计，不易折断及变形

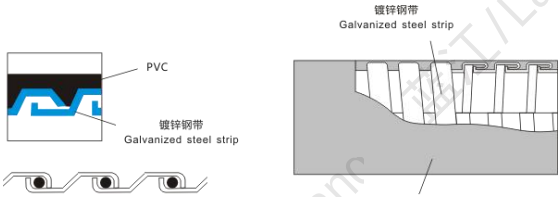

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Protection: Waterproof and dustproof

Temperature:- 10 ° C to 80 ° C, customizable for high temperature resistance

Color: Black, Grey

Features: This flat plastic metal hose has a smooth appearance, waterproof, insulation, tensile and other characteristics. The internal structure is smooth, easy to thread, and the reverse buckle design is not easy to break or deform

单扣平包塑尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSP-10B	10±0.3	5/16"	15.2±0.5	70	100
JSP-13B	13±0.35	3/8"	18.0±0.5	80	50
JSP-16B	16±0.4	1/2"	21.0±0.5	107	50
JSP-20B	20±0.4	3/4"	26.5±0.5	120	50
JSP-25B	25±0.45	1"	33.1±0.5	130	50
JSP-32B	32±0.5	1-1/4"	42.0±0.6	150	20
JSP-38B	38±0.6	1-1/2"	48.2±0.6	165	20
JSP-51B	51±0.8	2"	60.1±1.0	240	20
JSP-64B	64±2	2-1/2"	72.7±2.0	315	10
JSP-75B	75±2	3"	88.4±2.0	340	10
JSP-100B	100±3	4"	114.0.1±	450	10

如需不锈钢材质，请于型号后加“-SS”

平包塑金属软管/双扣

Flat plastic coated metal hose/Double buckle

品牌：蓝江/Land




材料：可选镀锌或不锈钢

防护：防水防尘

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款平包塑金属软管外表平滑，具有防水，绝缘，抗拉等特性，内部结构平滑，穿线便捷，反扣设计，不易折断及变形

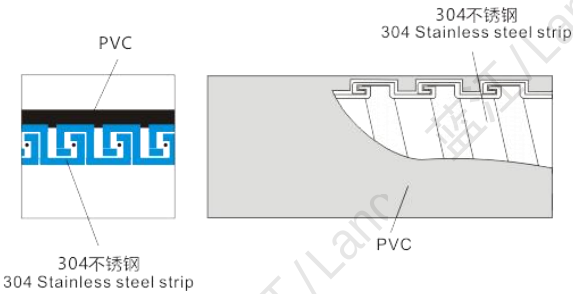

Brand: Land

Material: Hot dip galvanized steel strip/outer PVC raw material

Protection: Waterproof and dustproof

Temperature:- 10 ° C to 80 ° C, customizable for high temperature resistance

Color: Black, Grey

Features: This flat plastic metal hose has a smooth appearance, waterproof, insulation, tensile and other characteristics. The internal structure is smooth, easy to thread, and the reverse buckle design is not easy to break or deform

双扣平包塑尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSKP-10B	10±0.3	5/16"	15.2±0.5	70	100
JSKP-13B	13±0.35	3/8"	18.0±0.5	80	50
JSKP-16B	16±0.4	1/2"	21.0±0.5	107	50
JSKP-20B	20±0.4	3/4"	26.5±0.5	120	50
JSKP-25B	25±0.45	1"	33.1±0.5	130	50
JSKP-32B	32±0.5	1-1/4"	42.0±0.6	150	20
JSKP-38B	38±0.6	1-1/2"	48.2±0.6	165	20
JSKP-51B	51±0.8	2"	60.1±1.0	240	20

如需不锈钢材质，请于型号后加“-SS”

304不锈钢金属软管/单扣

304 Stainless steel metal hose/Single buckle

品牌：蓝江/Land




材料：304不锈钢

结构：单扣

防腐：304性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，国标厚度，容易分割

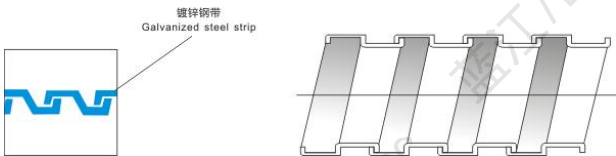

Brand: Land

Material: 304 stainless steel

Structure: single buckle

Anti corrosion: 304 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

Single deduction: Low cost, national standard thickness, easy to divide

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSH-6-SS	Φ 6	3/16"	8.2±0.3	40	200
JSH-8-SS	Φ 8	1/4"	11.0±0.3	45	100
JSH-10-SS	Φ 10	5/16"	13.5±0.3	55	100
JSH-13-SS	Φ 13	3/8"	15.5±0.35	65	100
JSH-16-SS	Φ 16	1/2"	20.0±0.4	85	100
JSH-20-SS	Φ 20	3/4"	24.3±0.4	100	50
JSH-25-SS	Φ 25	1"	30.3±0.45	115	50
JSH-32-SS	Φ 32	1-1/4"	38.0±0.5	140	25
JSH-38-SS	Φ 38	1-1/2"	45.0±0.6	160	25
JSH-51-SS	Φ 51	2"	58.0±0.8	190	20
JSH-64-SS	Φ 64	2 1/2"	72.5±2.0	280	20
JSH-75-SS	Φ 75	3"	83.5±2.0	320	20
JSH-100-SS	Φ 100	4"	108.5±3.0	380	10

304 不锈钢金属软管/双扣

304 Stainless steel metal hose

品牌：蓝江/Land





材料：304不锈钢

结构：双扣

防腐：304性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，国标厚度，容易分割

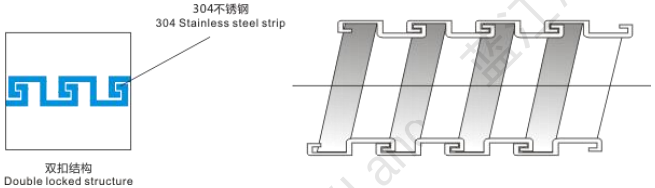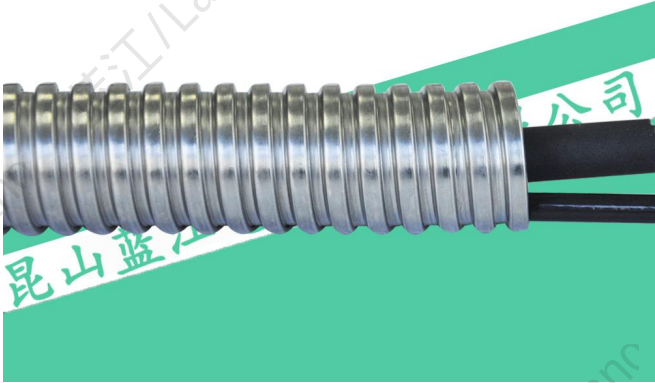

Brand: Land

Material: 304 stainless steel

Structure: Double buckle

Anti corrosion: 304 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

Single deduction: Low cost, national standard thickness, easy to divide

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSHK-10-SS	Φ 10	5/16"	13.0±0.5	55	100
JSHK-13-SS	Φ 13	3/8"	16.0±0.5	65	100
JSHK-16-SS	Φ 16	1/2"	18.5±0.5	85	100
JSHK-20-SS	Φ 20	3/4"	24.3±0.5	100	50
JSHK-25-SS	Φ 25	1"	30.0±0.5	120	50
JSHK-32-SS	Φ 32	1-1/4"	39.0±0.5	150	25
JSHK-38-SS	Φ 38	1-1/2"	44.0±0.5	180	25
JSHK-51-SS	Φ 51	2"	56.0±0.5	220	20

316不锈钢金属软管/单扣

316 Stainless steel metal hose/Single buckle

品牌：蓝江/Land




材料：316不锈钢

结构：单扣

防腐：316性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，国标厚度，容易分割

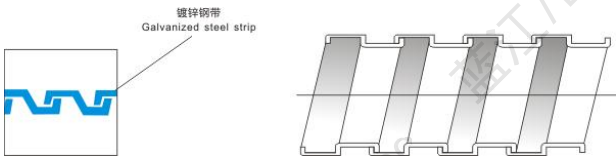

Brand: Land

Material: 316 stainless steel

Structure: single buckle

Anti corrosion: 316 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

Single deduction: Low cost, national standard thickness, easy to divide

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSH-6-S316	Φ 6	3/16"	8.2±0.3	40	200
JSH-8-S316	Φ 8	1/4"	11.0±0.3	45	100
JSH-10-S316	Φ 10	5/16"	13.5±0.3	55	100
JSH-13-S316	Φ 13	3/8"	15.5±0.35	65	100
JSH-16-S316	Φ 16	1/2"	20.0±0.4	85	100
JSH-20-S316	Φ 20	3/4"	24.3±0.4	100	50
JSH-25-S316	Φ 25	1"	30.3±0.45	115	50
JSH-32-S316	Φ 32	1-1/4"	38.0±0.5	140	25
JSH-38-S316	Φ 38	1-1/2"	45.0±0.6	160	25
JSH-51-S316	Φ 51	2"	58.0±0.8	190	20
JSH-64-S316	Φ 64	2 1/2"	72.5±2.0	280	20
JSH-75-S316	Φ 75	3"	83.5±2.0	320	20
JSH-100-S316	Φ 100	4"	108.5±3.0	380	10

316不锈钢金属软管/双扣

316 Stainless steel metal hose

品牌：蓝江/Land




材料：316不锈钢

结构：双扣

防腐：316性能防腐

特性：本款不锈钢金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，国标厚度，容易分割

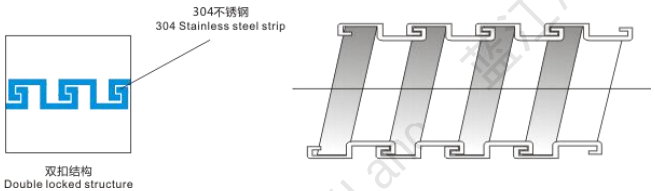

Brand: Land

Material: 316 stainless steel

Structure: Double buckle

Anti corrosion: 316 performance anti-corrosion

Features: This stainless steel metal hose has good flexibility and bending performance, a smooth internal structure, and easy and fast threading

Single deduction: Low cost, national standard thickness, easy to divide

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSHK-10-S316	Φ 10	5/16"	13.0±0.5	55	100
JSHK-13-S316	Φ 13	3/8"	16.0±0.5	65	100
JSHK-16-S316	Φ 16	1/2"	18.5±0.5	85	100
JSHK-20-S316	Φ 20	3/4"	24.3±0.5	100	50
JSHK-25-S316	Φ 25	1"	30.0±0.5	120	50
JSHK-32-S316	Φ 32	1-1/4"	39.0±0.5	150	25
JSHK-38-S316	Φ 38	1-1/2"	44.0±0.5	180	25
JSHK-51-S316	Φ 51	2"	56.0±0.5	220	20

304不锈钢包塑软管/单扣

304 Stainless steel metal hose/Single buckle

品牌：蓝江/Land



材料：304不锈钢/外PVC原料


结构：单扣

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，防水绝缘，单型反扣不易折断

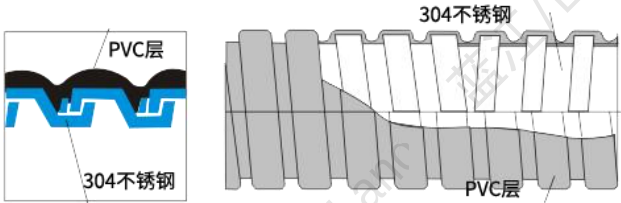

Brand: Land

Material: 304 stainless steel/outer PVC raw material

Structure: single buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.

Single button: Low cost, waterproof insulation, not easy to break

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JS-6B-SS	Φ 6	3/16"	9.0±0.25	40	200
JS-8B-SS	Φ 8	1/4"	11.8±0.3	45	100
JS-10B-SS	Φ 10	5/16"	14.2±0.3	50	100
JS-13B-SS	Φ 13	3/8"	16.5±0.35	70	100
JS-16B-SS	Φ 16	1/2"	20.5±0.4	82.5	100
JS-20B-SS	Φ 20	3/4"	25.7±0.4	90	50
JS-25B-SS	Φ 25	1"	31.7±0.45	100	50
JS-32B-SS	Φ 32	1-1/4"	39.5±0.5	115	25
JS-38B-SS	Φ 38	1-1/2"	46.5±0.6	125	25
JS-51B-SS	Φ 51	2"	60.0±0.8	150	20
JS-64B-SS	Φ 64	2 1/2"	74.1±2.0	215	10
JS-75B-SS	Φ 75	3"	85.1±2.0	240	10
JS-100B-SS	Φ 100	4"	110.1±3.0	325	10

304不锈钢包塑软管/双扣

304 Stainless steel metal hose/Double buckle

品牌：蓝江/Land



材料：304不锈钢/外PVC原料

结构：双扣

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，防水绝缘，抗拉力极强不脱钩



Brand: Land

Material: 304 stainless steel/outer PVC raw material

Structure: single or double buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.

Double buckle: Tight structure, waterproof insulation, extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B-SS	10±0.3	5/16"	14.2±0.3	50	100
JSK-13B-SS	13±0.35	3/8"	16.5±0.35	70	100
JSK-16B-SS	16±0.4	1/2"	20.5±0.4	82.5	100
JSK-20B-SS	20±0.4	3/4"	25.7±0.4	90	50
JSK-25B-SS	25±0.45	1"	31.7±0.45	100	50
JSK-32B-SS	32±0.5	1-1/4"	39.5±0.5	115	25
JSK-38B-SS	38±0.6	1-1/2"	46.5±0.6	125	25
JSK-51B-SS	51±0.8	2"	60±0.8	150	20

316不锈钢包塑软管/单扣

316 Stainless steel metal hose/Single buckle

品牌：蓝江/Land



材料：316不锈钢/外PVC原料


结构：单扣

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

单扣：成本较低，防水绝缘，单型反扣不易折断

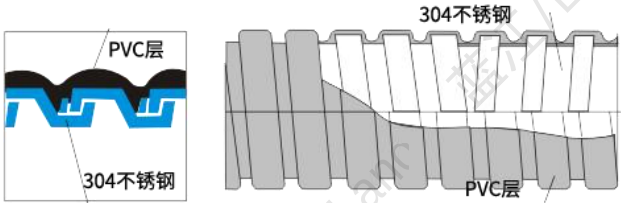

Brand: Land

Material: 316 stainless steel/outer PVC raw material

Structure: single buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.

Single button: Low cost, waterproof insulation, not easy to break

产品尺寸表（单扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JS-6B-S316	Φ 6	3/16"	9.0±0.25	40	200
JS-8B-S316	Φ 8	1/4"	11.8±0.3	45	100
JS-10B-S316	Φ 10	5/16"	14.2±0.3	50	100
JS-13B-S316	Φ 13	3/8"	16.5±0.35	70	100
JS-16B-S316	Φ 16	1/2"	20.5±0.4	82.5	100
JS-20B-S316	Φ 20	3/4"	25.7±0.4	90	50
JS-25B-S316	Φ 25	1"	31.7±0.45	100	50
JS-32B-S316	Φ 32	1-1/4"	39.5±0.5	115	25
JS-38B-S316	Φ 38	1-1/2"	46.5±0.6	125	25
JS-51B-S316	Φ 51	2"	60.0±0.8	150	20
JS-64B-S316	Φ 64	2 1/2"	74.1±2.0	215	10
JS-75B-S316	Φ 75	3"	85.1±2.0	240	10
JS-100B-S316	Φ 100	4"	110.1±3.0	325	10

316不锈钢包塑软管/双扣

316 Stainless steel metal hose/Double buckle

品牌：蓝江/Land



材料：316不锈钢/外PVC原料

结构：双扣

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：本款包塑金属软管具有良好的柔软与弯曲性能，内部平滑构造，穿线方便快捷

双扣：结构紧密，防水绝缘，抗拉力极强不脱钩



Brand: Land

Material: 316 stainless steel/outer PVC raw material

Structure: single or double buckle

Temperature:- 10 ° C to 80 ° C

Color: Black, Grey

Features: This galvanized metal hose has good flexibility and bending performance, smooth internal structure, and easy and fast threading.

Double buckle: Tight structure, waterproof insulation, extremely strong tensile strength

产品尺寸表（双扣）

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
JSK-10B-S316	10±0.3	5/16"	14.2±0.3	50	100
JSK-13B-S316	13±0.35	3/8"	16.5±0.35	70	100
JSK-16B-S316	16±0.4	1/2"	20.5±0.4	82.5	100
JSK-20B-S316	20±0.4	3/4"	25.7±0.4	90	50
JSK-25B-S316	25±0.45	1"	31.7±0.45	100	50
JSK-32B-S316	32±0.5	1-1/4"	39.5±0.5	115	25
JSK-38B-S316	38±0.6	1-1/2"	46.5±0.6	125	25
JSK-51B-S316	51±0.8	2"	60±0.8	150	20

TPU包塑金属软管

TPU coated metal hose



品牌：蓝江/Land

材料：内可选镀锌及不锈钢，外改性TPU材质

防护：防水防尘

结构：可选单扣、双扣或平包塑

温度：-10° C至80° C，短时可达100° C

颜色：黑色、灰色

特性：TPU包塑软管具有低烟无卤，防水，绝缘，抗拉等特性，产品内部平滑，穿线便捷，防火阻燃，柔韧性好，被广泛应用于机器人，轨道交通，工业自动化，照明安防等行业



Brand: Land

Material: Internally available galvanized and stainless steel, externally TPU

Protection: Waterproof and dustproof

Structure: Optional single buckle, double buckle or flat plastic wrap

Temperature:- 10 ° C to 80 ° C, customizable for high temperature resistance

Color: Black, Grey

Features: TPU coated hose has the characteristics of low smoke and halogen-free, waterproof, insulation, tensile strength, etc. The product is smooth inside, easy to thread, fire-resistant and flame-retardant, and has good flexibility. It is widely used in industries such as robotics, rail transit, industrial automation, lighting and security


TPU包塑软管尺寸表

蓝江产品型号	公制规格	英制规格	外径及公差	自然弯曲半径	包装
Product model	Metric	Imperial	Adapter tube	Bending diameter	quantity
PN.	Φ	G	Φ mm	mm	Pcs/bag
TPU-10B-SS	10±0.3	5/16"	14.2±0.3	50	100
TPU-13B-SS	13±0.35	3/8"	16.5±0.35	70	100
TPU-16B-SS	16±0.4	1/2"	20.5±0.4	82	100
TPU-20B-SS	20±0.4	3/4"	25.7±0.4	90	50
TPU-25B-SS	25±0.45	1"	31.7±0.45	100	50
TPU-32B-SS	32±0.5	1-1/4"	39.5±0.5	115	25
TPU-38B-SS	38±0.6	1-1/2"	46.5±0.6	125	25
TPU-51B-SS	51±0.8	2"	60.0±0.8	150	20

端接式锌合金软管接头

DPJ Zinc alloy hose connector

- 品牌:** 蓝江/Land
- 材料:** A. C. F为锌合金, B. E丁腈橡胶, D为铁皮制成
- 螺纹:** M牙, PG牙, G (PF) 牙, NPT牙
- 防护:** IP65
- 温度:** -40° C至100° C
- 特性:** 加厚型锌合金镀锌或镀铬, 外形美观, 结构紧密, 强度高, 软管护套与软管相扣接紧设计, 装配省时便利, 抗拉力强, 可防水, 防尘, 抗盐, 耐酸碱, 酒精, 油脂等一般溶剂
- 定制:** 除选型手册规格外, 可按照要求定制螺纹大小

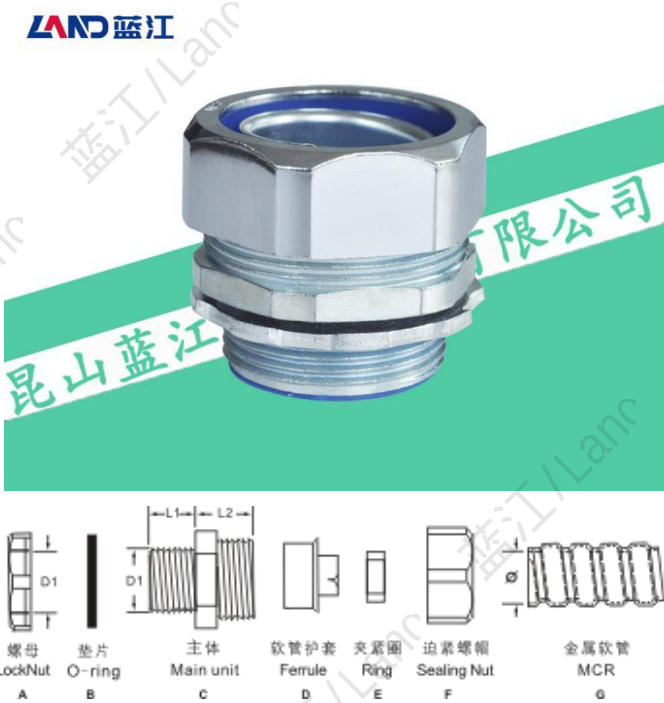

- Brand:** Land
- Material:** A. C. F zinc alloy, B. E nitrile rubber, D iron sheet
- Threads:** M thread, PG thread, G (PF) thread, NPT thread
- Protection:** IP65
- Temperature:** -40 ° C to 100 ° C
- Features:** Thickened zinc alloy galvanized or chrome plated, with a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, is waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents
- Customization:** Customization can be made according to requirements

产品尺寸表

蓝江产品型号	适配软管	螺纹尺寸	螺纹长度	扳手尺寸	包装
Product model	Adapt hose	Thread size	Thread length	Wrench Size	quantity
PN.	Φ mm	M/G/NPT	GL mm	cap mm	Pcs/bag
DPJ-M16-10	Φ 10	M16×1.5	9	22	50
DPJ-M20-12	Φ 12	M20×1.5	10	26	50
DPJ-M20-15	Φ 15	M20×1.5	10	30	50
DPJ-M24-15	Φ 15	M24×1.5	11	30	50
DPJ-M25-20	Φ 20	M25×1.5	12	35	50
DPJ-M27-20	Φ 20	M27×2.0	12	35	50
DPJ-M30-20	Φ 20	M30×2.0	12	35	50
DPJ-M32-25	Φ 25	M32×1.5	15	43	50
DPJ-M33-25	Φ 25	M33×2.0	15	43	50
DPJ-M36-25	Φ 25	M36×2.0	15	43	50
DPJ-M36-32	Φ 32	M36×2.0	15	52	20
DPJ-M40-32	Φ 32	M40×1.5	15	52	20
DPJ-M42-32	Φ 32	M42×2.0	15	52	20
DPJ-M48-32	Φ 32	M48×2.0	15	52	20
DPJ-M48-38	Φ 38	M48×2.0	15	60	20
DPJ-M50-38	Φ 38	M50×1.5	18	60	10
DPJ-M60-51	Φ 51	M60×2.0	20	71	10
DPJ-M63-51	Φ 51	M63×1.5	20	71	10
DPJ-G3/8-10	Φ 10	G3/8	7	22	50
DPJ-G3/8-12	Φ 12	G3/8	10	26	50
DPJ-G1/2-15	Φ 15	G1/2	10	30	50
DPJ-G3/4-20	Φ 20	G3/4	12	35	50
DPJ-G1-25	Φ 25	G1	14	43	50
DPJ-G1-1/4-32	Φ 32	G1-1/4	14	52	20
DPJ-G1-1/2-38	Φ 38	G1-1/2	16	60	10
DPJ-G2-51	Φ 51	G2	16	71	10
DPJ-NPT1/2-15	Φ 15	NPT1/2	10	30	50
DPJ-NPT3/4-20	Φ 20	NPT3/4	12	35	50
DPJ-NPT1-25	Φ 25	NPT1	14	43	50

内螺纹锌合金软管接头

DNJ Zinc alloy hose connector

品牌：蓝江/Land

材料：C.F为锌合金，E丁腈橡胶，D为铁皮制成

螺纹：M牙，G(PF)牙

防护：IP65

温度：-40° C至100° C

特性：加厚型锌合金镀锌或镀铬，外形美观，结构紧密，强度高，软管护套与软管相扣接紧设计，装配省时便利

Brand: Land

Material: C. F zinc alloy, E nitrile rubber, D iron sheet

Threads: M thread, G (PF) thread


Protection: IP65

Temperature:-40 ° C to 100 ° C

Features: Thickened zinc alloy galvanized or chrome plated, with beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient

产品尺寸表

蓝江产品型号	适配软管	螺纹尺寸	螺纹长度	扳手尺寸
Product model	Adapt hose	Thread size	Thread length	Wrench Size
PN.	Φ mm	M/G/NPT	GL mm	cap mm
DNJ-M16-10	Φ 10	M16×1.5	24	50
DNJ-M20-12	Φ 12	M20×1.5	27	50
DNJ-M20-15	Φ 15	M20×1.5	30	50
DNJ-M20-20	Φ 20	M20×1.5	36	50
DNJ-M25-20	Φ 20	M25×1.5	36	50
DNJ-M32-25	Φ 25	M32×1.5	42	50
DNJ-M40-32	Φ 32	M40×1.5	52	20
DNJ-M50-38	Φ 38	M50×1.5	60	10
DNJ-M63-51	Φ 51	M63×1.5	75	10
DNJ-G3/8-10	Φ 10	G3/8	24	50
DNJ-G3/8-12	Φ 12	G3/8	26	50
DNJ-G1/2-15	Φ 15	G1/2	30	50
DNJ-G3/4-20	Φ 20	G3/4	36	50
DNJ-G1-25	Φ 25	G1	42	50
DNJ-G1-1/4-32	Φ 32	G1-1/4	52	20
DNJ-G1-1/2-38	Φ 38	G1-1/2	60	10
DNJ-G2-51	Φ 51	G2	75	10

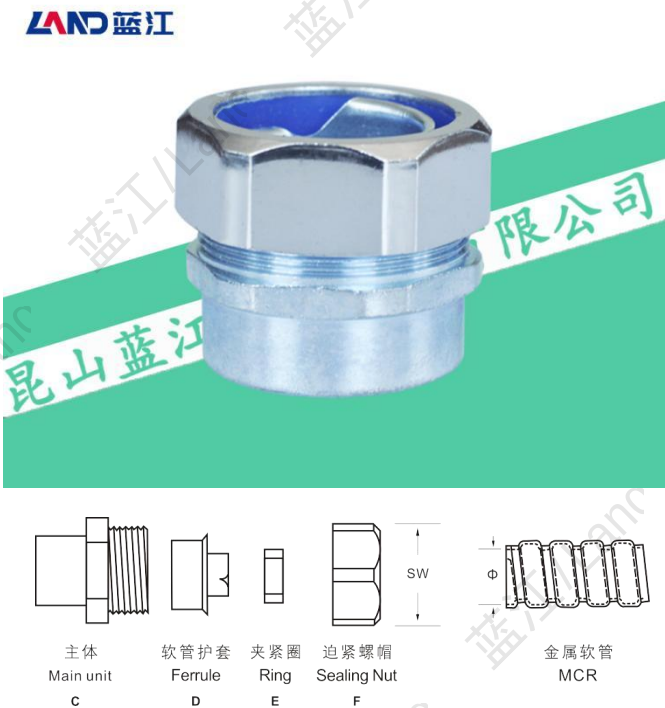

卡套式锌合金软管接头

DKJ Zinc alloy hose connector


品牌：蓝江/Land



材料：C.F为锌合金，E丁腈橡胶，D为铁皮制成

温度：-40° C至100° C

特性：加厚型锌合金镀锌或镀铬，外形美观，结构紧密，强度高，软管护套与软管相扣接紧设计，装配省时便利

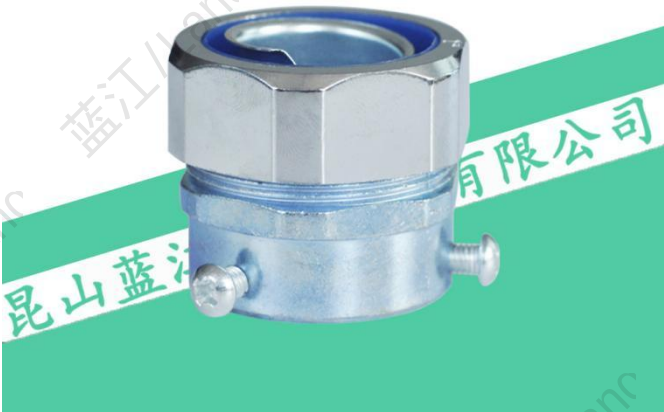

Brand: Land

Material: C. F zinc alloy, E nitrile rubber, D iron sheet

Temperature:-40 ° C to 100 ° C

Features: Thickened zinc alloy galvanized or chrome plated, with beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient

公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DKJ-G3/8-12	Φ 12	#12	17×2.25	#15	15.87×1.6
DKJ-G1/2-15	Φ 15	#15	21.25×2.75	#20	19.05×1.6
DKJ-G3/4-20	Φ 20	#20	26.75×2.75	#25	25.4×1.8
DKJ-G1-25	Φ 25	#25	33.5×3.35	#32	31.75×1.8
DKJ-G1-1/4-32	Φ 32	#32	42.25×3.25	#40	38.1×1.8
DKJ-G1-1/2-38	Φ 38	#40	48×3.35	#50	50.8×1.8
DKJ-G2-51	Φ 51	#50	60×3.5	#70	63.5×2.5
DKJ-G2-1/2-64	Φ 64	#70	75.5×3.75	#80	76.2×3.2

英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DKJ-G3/8-12	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DKJ-G1/2-15	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DKJ-G3/4-20	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DKJ-G1-25	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DKJ-G1-1/4-32	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DKJ-G1-1/2-38	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DKJ-G2-51	2"	2"	60×3.5	2-1/2"	63.5×2.5
DKJ-G2-1/2-64	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

自固式锌合金软管接头

DGJ Zinc alloy hose connector

品牌：蓝江/Land

材料：B. D. G为锌合金，C. F丁腈橡胶，E为铁皮制成

温度：-40° C至100° C

特性：加厚型锌合金镀锌或镀铬，外形美观，结构紧密，强度高，软管护套与软管相扣接紧设计，装配省时便利

Brand: Land

Material: C. F zinc alloy, E nitrile rubber, D iron sheet

Temperature:-40 ° C to 100 ° C


Features: Thickened zinc alloy galvanized or chrome plated, with beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient

公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DGJ-G3/8-12	Φ 12	#12	17×2.25	#15	15.87×1.6
DGJ-G1/2-15	Φ 15	#15	21.25×2.75	#20	19.05×1.6
DGJ-G3/4-20	Φ 20	#20	26.75×2.75	#25	25.4×1.8
DGJ-G1-25	Φ 25	#25	33.5×3.35	#32	31.75×1.8
DGJ-G1-1/4-32	Φ 32	#32	42.25×3.25	#40	38.1×1.8
DGJ-G1-1/2-38	Φ 38	#40	48×3.35	#50	50.8×1.8
DGJ-G2-51	Φ 51	#50	60×3.5	#70	63.5×2.5
DGJ-G2-1/2-64	Φ 64	#70	75.5×3.75	#80	76.2×3.2

英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	Adapt hose	Thick pipe	Product size	Thin tube	Product size
PN.	Φ mm	mm	mm	mm	mm
DGJ-G3/8-12	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DGJ-G1/2-15	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DGJ-G3/4-20	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DGJ-G1-25	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DGJ-G1-1/4-32	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DGJ-G1-1/2-38	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DGJ-G2-51	2"	2"	60×3.5	2-1/2"	63.5×2.5
DGJ-G2-1/2-64	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

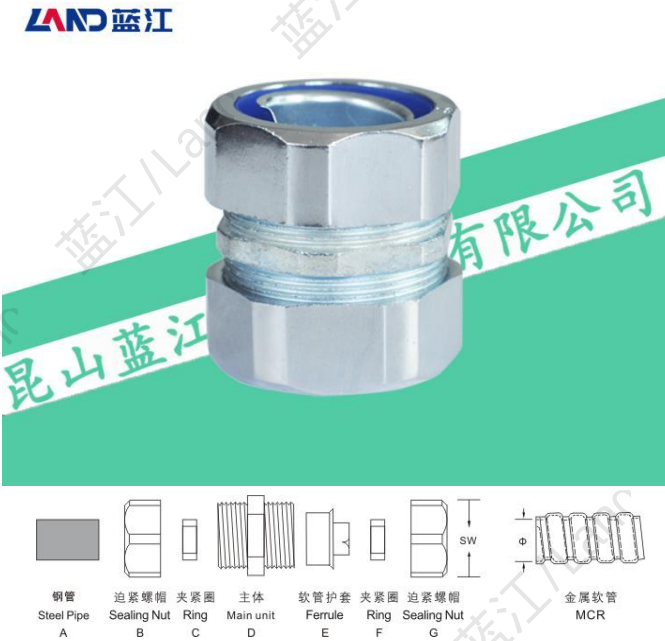

90度弯角式锌合金软管接头

90 degree angled zinc alloy hose elbow

品牌：蓝江/Land



材料：A. C. F为锌合金，B. E为NBR，D为铁皮

防护：IP65

温度：-40° C至100° C

特性：90度弯角设计，外形美观，装配省时便利




Brand: Land

Material: A. C. F zinc alloy, B. E nitrile rubber, D iron sheet

Protection: IP65

Temperature:-40 ° C to 100 ° C

Features: 90 degree bend design, beautiful appearance, time-saving and convenient assembly

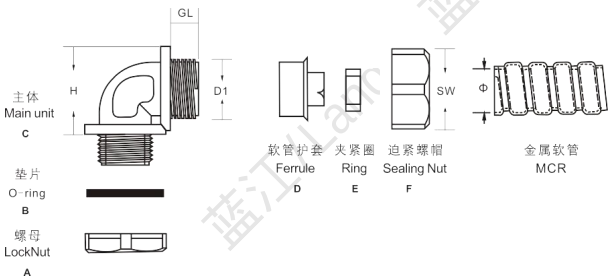

产品尺寸表

蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread diameter	Thread length	quantity
PN.	Φ mm	M	AG mm	GL mm	Pcs/bag
DWJ90-M16-10	Φ 10	M16×1.5	16	10	50
DWJ90-M20-12	Φ 12	M20×1.5	20	10	50
DWJ90-M20-15	Φ 15	M20×1.5	20	12	50
DWJ90-M20-20	Φ 20	M20×1.5	20	12	50
DWJ90-M25-20	Φ 20	M25×1.5	25	12	50
DWJ90-M32-25	Φ 25	M32×1.5	32	15	20
DWJ90-M40-32	Φ 32	M40×1.5	40	15	10
DWJ90-M50-38	Φ 38	M50×1.5	50	16	10
DWJ90-M63-51	Φ 51	M63×1.5	63	16	10
DWJ90-G3/8-10	Φ 10	G3/8	16.65	10	50
DWJ90-G3/8-12	Φ 12	G3/8	16.65	10	50
DWJ90-G1/2-15	Φ 15	G1/2	20.95	12	50
DWJ90-G3/4-20	Φ 20	G3/4	26.44	12	50
DWJ90-G1-25	Φ 25	G1	33.24	15	20
DWJ90-G1-1/4-3	Φ 32	G1-1/4	41.91	15	10
DWJ90-G1-1/2-3	Φ 38	G1-1/2	47.8	15	10
DWJ90-G2-51	Φ 51	G2	59.61	15	10
DWJ90-NPT3/8-1	Φ 10	NPT3/8	16.65	10	50
DWJ90-NPT3/8-1	Φ 12	NPT3/8	16.65	10	50
DWJ90-NPT1/2-1	Φ 15	NPT1/2	20.85	12	50
DWJ90-NPT3/4-2	Φ 20	NPT3/4	26.3	12	50
DWJ90-NPT1-25	Φ 25	NPT1	33.15	15	20
DWJ90-NPT1-1/4	Φ 32	NPT1-1/4	41.85	15	10
DWJ90-NPT1-1/2	Φ 38	NPT1-1/2	47.75	15	10
DWJ90-NPT2-51	Φ 51	NPT2	59.55	15	10

45度弯角式锌合金软管接头

45 degree angled zinc alloy hose elbow

品牌：蓝江/Land

材料：A. C. F为锌合金，B. E为NBR，D为铁皮

防护：IP65

温度：-40° C至100° C

特性：90度弯角设计，外形美观，装配省时便利


Brand: Land

Material: A. C. F zinc alloy, B. E nitrile rubber, D iron sheet

Protection: IP65

Temperature:-40 ° C to 100 ° C

Features: 90 degree bend design, beautiful appearance, time-saving and convenient assembly

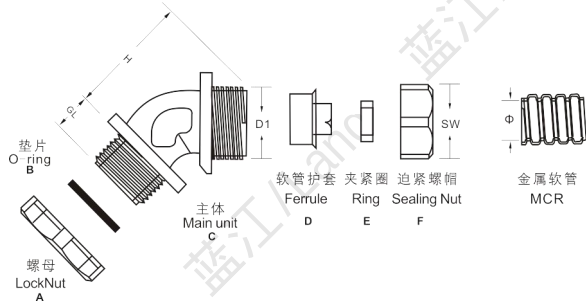

产品尺寸表

蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread diameter	Thread length	quantity
PN.	Φ mm	M	AG mm	GL mm	Pcs/bag
DWJ45-M16-10	Φ 10	M16×1.5	16	10	50
DWJ45-M20-12	Φ 12	M20×1.5	20	10	50
DWJ45-M20-15	Φ 15	M20×1.5	20	12	50
DWJ45-M20-20	Φ 20	M20×1.5	20	12	50
DWJ45-M25-20	Φ 20	M25×1.5	25	12	50
DWJ45-M32-25	Φ 25	M32×1.5	32	15	20
DWJ45-M40-32	Φ 32	M40×1.5	40	15	10
DWJ45-M50-38	Φ 38	M50×1.5	50	16	10
DWJ45-M63-51	Φ 51	M63×1.5	63	16	10
DWJ45-G3/8-10	Φ 10	G3/8	16.65	10	50
DWJ45-G3/8-12	Φ 12	G3/8	16.65	10	50
DWJ45-G1/2-15	Φ 15	G1/2	20.95	12	50
DWJ45-G3/4-20	Φ 20	G3/4	26.44	12	50
DWJ45-G1-25	Φ 25	G1	33.24	15	20
DWJ45-G1-1/4-3	Φ 32	G1-1/4	41.91	15	10
DWJ45-G1-1/2-3	Φ 38	G1-1/2	47.8	15	10
DWJ45-G2-51	Φ 51	G2	59.61	15	10
DWJ45-NPT3/8-1	Φ 10	NPT3/8	16.65	10	50
DWJ45-NPT3/8-1	Φ 12	NPT3/8	16.65	10	50
DWJ45-NPT1/2-1	Φ 15	NPT1/2	20.85	12	50
DWJ45-NPT3/4-2	Φ 20	NPT3/4	26.3	12	50
DWJ45-NPT1-25	Φ 25	NPT1	33.15	15	20
DWJ45-NPT1-1/4	Φ 32	NPT1-1/4	41.85	15	10
DWJ45-NPT1-1/2	Φ 38	NPT1-1/2	47.75	15	10
DWJ45-NPT2-51	Φ 51	NPT2	59.55	15	10

RG型带锁紧不锈钢软管接头

RG locking stainless steel hose connector

品牌：蓝江/Land



材料：A. C. F. G. I为不锈钢，B. E为EPDM，D尼龙

螺纹：M牙、G（PF）牙、NPT牙

防护：IP68

温度：-40° C至100° C

特性：带锁紧软管与电缆设计，外形美观，结构紧密，软管护套与软管相扣设计，配合锁紧接头，安装便捷，抗拉力强，另可防水，防尘，抗盐，耐油脂

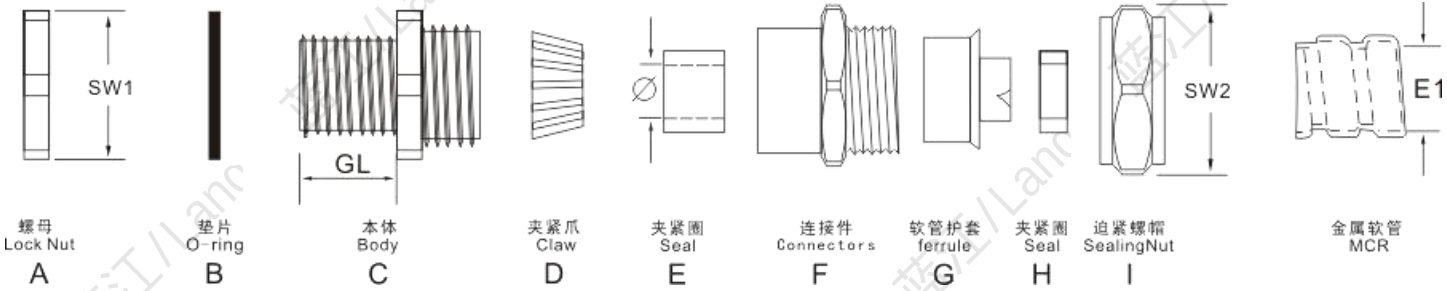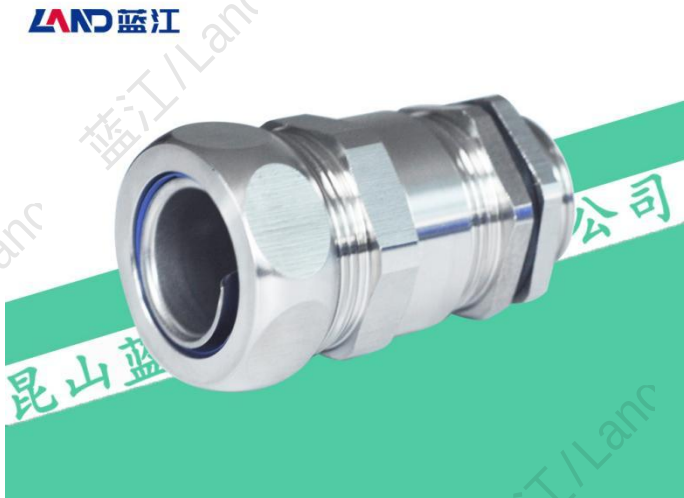

Brand: Land

Material: A. C.F.G.I is stainless steel, B.E is EPDM, D nylon

Threads: M thread, G（PF） thread, NPT thread

Protection: IP68

Temperature:-40 ° C to 100 ° C

Features: Designed with locking hose and cable, it has a beautiful appearance and tight structure. The hose sheath is designed to be interlocked with the hose, and it is matched with a locking joint for easy installation. It has strong tensile strength and can also be waterproof, dustproof, salt resistant, grease resistant, etc

产品尺寸表/M

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装
Product model	Thread size	Cable range	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RG6-M12-08-SS	M12×1.5	4~8	Φ 6	9	50
RG6-M12-05-SS	M12×1.5	3~5.5	Φ 6	9	50
RG10-M12-08-SS	M12×1.5	4~8	Φ 10	9	50
RG10-M16-10-SS	M16×1.5	6~10	Φ 10	9.5	50
RG10-M18-10-SS	M18×1.5	6~10	Φ 10	9.5	50
RG12-M20-12-SS	M20×1.5	7~12	Φ 12	12	50
RG15-M20-14-SS	M20×1.5	8~14	Φ 15	12	50
RG20-M20-14-SS	M20×1.5	8~14	Φ 20	12	50
RG15-M22-14-SS	M22×1.5	8~14	Φ 15	12	50
RG15-M24-14-SS	M24×1.5	8~14	Φ 15	10.5	50
RG20-M25-18-SS	M25×1.5	13~18	Φ 20	12	20
RG25-M25-18-SS	M25×1.5	13~18	Φ 25	12	20
RG20-M27-18-SS	M27×1.5	13~18	Φ 20	12	20
RG20-M30-18-SS	M30×2.0	13~18	Φ 20	12.5	20
RG25-M32-25-SS	M32×1.5	18~25	Φ 25	12.5	20
RG32-M32-25-SS	M32×1.5	18~25	Φ 32	12.5	20
RG25-M36-25-SS	M36×2.0	18~25	Φ 25	13	20
RG32-M40-32-SS	M40×1.5	25~31	Φ 32	14	10
RG38-M40-32-SS	M40×1.5	25~31	Φ 38	14	10
RG32-M42-32-SS	M42×2.0	25~31	Φ 32	15	10
RG32-M48-32-SS	M48×2.0	25~31	Φ 32	15	10
RG38-M50-41-SS	M50×1.5	33~41	Φ 38	15	10
RG51-M50-41-SS	M50×1.5	33~41	Φ 51	15	10
RG51-M60-44-SS	M60×2.0	36~44	Φ 51	15	10
RG51-M63-54-SS	M63×1.5	46~54	Φ 51	15	10

产品尺寸表/G(PF)/NPT

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装
Product model	Thread size	Cable range	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RG6-G1/4-05-SS	G1/4	3~5.5	Φ 6	9	50
RG8-G1/4-08-SS	G1/4	4~8	Φ 8	9	50
RG10-G3/8-10-SS	G3/8	6~10	Φ 10	9.5	50
RG12-G1/2-12-SS	G1/2	7~12	Φ 12	12	50
RG15-G1/2-12-SS	G1/2	7~12	Φ 15	12	50
RG15-G1/2-14-SS	G1/2	8~14	Φ 15	12	50
RG20-G3/4-18-SS	G3/4	13~18	Φ 20	12	20
RG25-G3/4-18-SS	G3/4	13~18	Φ 25	12	20
RG25-G1-25-SS	G1	18~25	Φ 25	15	20
RG32-G1-25-SS	G1	18~25	Φ 32	15	20
RG32-G1-1/4-31-SS	G1-1/4	25~31	Φ 32	15	10
RG32-G1-1/2-31-SS	G1-1/2	25~31	Φ 32	15	10
RG38-G1-1/2-41-SS	G1-1/2	33~41	Φ 38	15	10
RG51-G2-44-SS	G2	36~44	Φ 51	15	10
RG6-NPT1/4-05-SS	NPT1/4	3~5.5	Φ 6	9	50
RG8-NPT1/4-08-SS	NPT1/4	4~8	Φ 8	9	50
RG10-NPT3/8-10-SS	NPT3/8	6~10	Φ 10	9.5	50
RG12-NPT1/2-12-SS	NPT1/2	7~12	Φ 15	12	50
RG15-NPT1/2-12-SS	NPT1/2	7~12	Φ 15	12	50
RG15-NPT1/2-14-SS	NPT1/2	8~14	Φ 15	12	50
RG20-NPT3/4-18-SS	NPT3/4	13~18	Φ 20	12	20
RG25-NPT3/4-18-SS	NPT3/4	13~18	Φ 25	12	20
RG25-NPT1-25-SS	NPT1	18~25	Φ 25	15	20
RG32-NPT1-25-SS	NPT1	18~25	Φ 32	15	20
RG32-NPT1-1/4-31-SS	NPT1-1/4	25~31	Φ 32	15	10
RG32-NPT1-1/2-31-SS	NPT1-1/2	25~31	Φ 32	15	10
RG38-NPT1-1/2-41-SS	NPT1-1/2	33~41	Φ 38	15	10
RG51-NPT2-44-SS	NPT2	36~44	Φ 51	15	10

DPJ端接式不锈钢软管接头

DPJ stainless steel hose connector

品牌：蓝江/Land

材料：A. C. D. F为不锈钢，B. E为硅胶

螺纹：M牙，G (PF) 牙，NPT牙

防护：IP68

温度：-40° C至100° C

特性：304或316不锈钢制成，外形美观，结构紧密，强度高，软管护套与软管相扣接紧设计，装配省时便利，抗拉力强，可防水，防尘，抗盐，耐酸碱，酒精，油脂等一般溶剂

定制：除选型手册规格外，可按照要求定制螺纹大小

Brand: Land

Material: A. C.D.F is stainless steel, B.E is EPDM rubber


Threads: M thread, G (PF) thread, NPT thread

Protection: IP68

Temperature:-40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, it has a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements

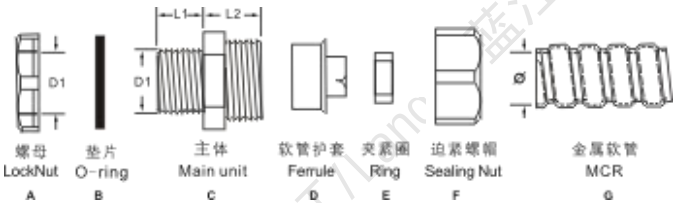

产品尺寸表M/G (PF) /NPT

蓝江产品型号	适配软管	公制螺纹	螺纹长度	扳手尺寸	包装
Product model	Adapt hose	M Thread	Thread length	Wrench Size	quantity
PN.	Φ mm	M	GL mm	cap mm	Pcs/bag
DPJ-M12-06-SS	Φ 6	M12×1.5	8.5	18	50
DPJ-M12-08-SS	Φ 8	M12×1.5	8.5	20	50
DPJ-M16-10-SS	Φ 10	M16×1.5	10	24	50
DPJ-M20-12-SS	Φ 12	M20×1.5	10	27	50
DPJ-M20-15-SS	Φ 15	M20×1.5	12	30	50
DPJ-M20-20-SS	Φ 20	M20×1.5	12	36	50
DPJ-M25-20-SS	Φ 20	M25×1.5	12	36	50
DPJ-M25-25-SS	Φ 25	M25×1.5	12	42	50
DPJ-M32-25-SS	Φ 25	M32×1.5	15	42	20
DPJ-M32-32-SS	Φ 32	M32×1.5	15	52	20
DPJ-M40-32-SS	Φ 32	M40×1.5	15	52	10
DPJ-M50-38-SS	Φ 38	M50×1.5	16	60	10
DPJ-M63-51-SS	Φ 51	M63×1.5	16	75	5
DPJ-G3/8-10-SS	Φ 10	G3/8	10	24	50
DPJ-G3/8-12-SS	Φ 12	G3/8	10	26	50
DPJ-G1/2-15-SS	Φ 15	G1/2	12	30	50
DPJ-G3/4-20-SS	Φ 20	G3/4	12	36	50
DPJ-G1-25-SS	Φ 25	G1	15	42	20
DPJ-G1-1/4-32-SS	Φ 32	G1-1/4	15	52	10
DPJ-G1-1/2-38-SS	Φ 38	G1-1/2	15	60	10
DPJ-G2-51-SS	Φ 51	G2	15	75	5
DPJ-NPT3/8-10-SS	Φ 10	NPT3/8	10	24	50
DPJ-NPT3/8-12-SS	Φ 12	NPT3/8	10	26	50
DPJ-NPT1/2-15-SS	Φ 15	NPT1/2	12	30	50
DPJ-NPT3/4-20-SS	Φ 20	NPT3/4	12	36	50
DPJ-NPT1-25-SS	Φ 25	NPT1	15	42	20
DPJ-NPT1-1/4-32-SS	Φ 32	NPT1-1/4	15	52	10
DPJ-NPT1-1/2-38-SS	Φ 38	NPT1-1/2	15	60	10
DPJ-NPT2-51-SS	Φ 51	NPT2	15	75	5

DNJ内牙式不锈钢软管接头

DNJ stainless steel hose connector

品牌：蓝江/Land

材料：C.D.F为不锈钢，E为硅胶

螺纹：M牙，G(PF)牙，NPT牙

防护：IP68

温度：-40° C至100° C

特性：304或316不锈钢制成，外形美观，结构紧密，强度高，软管护套与软管相扣接紧设计，装配省时便利，抗拉力强，可防水，防尘，抗盐，耐酸碱，酒精，油脂等一般溶剂

定制：除选型手册规格外，可按照要求定制螺纹大小

Brand: Land

Material: C. D. F is stainless steel, E is silicone


Threads: M thread,G (PF) thread, NPT thread

Protection: IP68

Temperature:-40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, it has a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements

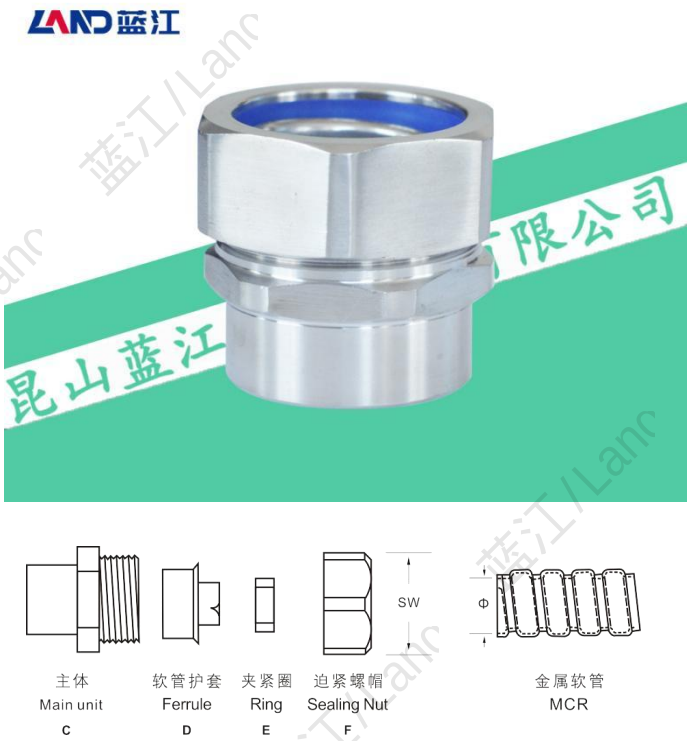

产品尺寸表M/G (PF) /NPT

蓝江产品型号	适配软管	内螺纹	扳手尺寸	包装
Product model	Adapt hose	F Thread	Wrench Size	quantity
PN.	Φ mm	F	cap mm	Pcs/bag
DNJ-G3/8-10-SS	Φ 10	G3/8	24	50
DNJ-G3/8-12-SS	Φ 12	G3/8	26	50
DNJ-G1/2-15-SS	Φ 15	G1/2	30	50
DNJ-G3/4-20-SS	Φ 20	G3/4	36	50
DNJ-G1-25-SS	Φ 25	G1	42	20
DNJ-G1-1/4-32-SS	Φ 32	G1-1/4	52	10
DNJ-G1-1/2-38-SS	Φ 38	G1-1/2	60	10
DNJ-G2-51-SS	Φ 51	G2	75	5
DNJ-M16-10-SS	Φ 10	M16×1.5	24	50
DNJ-M20-12-SS	Φ 12	M20×1.5	27	50
DNJ-M20-15-SS	Φ 15	M20×1.5	30	50
DNJ-M20-20-SS	Φ 20	M20×1.5	36	50
DNJ-M25-20-SS	Φ 20	M25×1.5	36	50
DNJ-M32-25-SS	Φ 25	M32×1.5	42	20
DNJ-M40-32-SS	Φ 32	M40×1.5	52	10
DNJ-M50-38-SS	Φ 38	M50×1.5	60	10
DNJ-M63-51-SS	Φ 51	M63×1.5	75	5
DNJ-NPT3/8-10-SS	Φ 10	NPT3/8	24	50
DNJ-NPT3/8-12-SS	Φ 12	NPT3/8	26	50
DNJ-NPT1/2-15-SS	Φ 15	NPT1/2	30	50
DNJ-NPT3/4-20-SS	Φ 20	NPT3/4	36	50
DNJ-NPT1-25-SS	Φ 25	NPT1	42	20
DNJ-NPT1-1/4-32-SS	Φ 32	NPT1-1/4	52	10
DNJ-NPT1-1/2-38-SS	Φ 38	NPT1-1/2	60	10
DNJ-NPT2-51-SS	Φ 51	NPT2	75	5

DKJ卡套式不锈钢软管接头

DKJ stainless steel hose connector

品牌：蓝江/Land



材料：C.D.F为不锈钢，E为硅胶

温度：-40° C至100° C

特性：304或316不锈钢制成，外形美观，结构紧密

Brand: Land

Material: C.D.F is sus304, E is silicone

Temperature:- 40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, with a beautiful appearance and tight structure



英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick steel pipe	external diameter/wall thickness	Thin steel tube	external diameter/wall thickness	quantity
PN.	Φ mm					Pcs/bag
DKJ-G3/8-12-SS	Φ 12	#12	17×2.25	#15	15.87×1.6	50
DKJ-G1/2-15-SS	Φ 15	#15	21.25×2.75	#20	19.05×1.6	50
DKJ-G3/4-20-SS	Φ 20	#20	26.75×2.75	#25	25.4×1.8	50
DKJ-G1-25-SS	Φ 25	#25	33.5×3.35	#32	31.75×1.8	20
DKJ-G1-1/4-32-SS	Φ 32	#32	42.25×3.25	#40	38.1×1.8	10
DKJ-G1-1/2-38-SS	Φ 38	#40	48×3.35	#50	50.8×1.8	10
DKJ-G2-51-SS	Φ 51	#50	60×3.5	#70	63.5×2.5	10
DKJ-G2-1/2-64-SS	Φ 64	#70	75.5×3.75	#80	76.2×3.2	5

公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick steel pipe	external diameter/wall thickness	Thin steel tube	external diameter/wall thickness	quantity
PN.	Φ mm					Pcs/bag
DKJ-G3/8-12-SS	3/8"	3/8"	17×2.25	1/2"	15.87×1.6	50
DKJ-G1/2-15-SS	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6	50
DKJ-G3/4-20-SS	3/4"	3/4"	26.75×2.75	1"	25.4×1.8	50
DKJ-G1-25-SS	1"	1"	33.5×3.35	1-1/4"	31.75×1.8	20
DKJ-G1-1/4-32-SS	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8	10
DKJ-G1-1/2-38-SS	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8	10
DKJ-G2-51-SS	2"	2"	60×3.5	2-1/2"	63.5×2.5	10
DKJ-G2-1/2-64-SS	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2	5

DGJ卡套式不锈钢软管接头

DGJ stainless steel hose connector

品牌：蓝江/Land



材料：B. D. E. F为不锈钢，F为硅胶

温度：-40° C至100° C

特性：304或316不锈钢制成，外形美观，结构紧密

Brand: Land

Material: B. D.E.F is SUS304, F is silicone

Temperature:-40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, with a beautiful appearance and tight structure



公称直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick pipe	Pipe size	Thin pipe	Pipe size	quantity
PN.	mm	mm	mm	mm	mm	Pcs/bag
DGJ-G3/8-12-SS	φ 12	#12	17×2.25	#15	15.87×1.6	50
DGJ-G1/2-15-SS	φ 15	#15	21.25×2.75	#20	19.05×1.6	50
DGJ-G3/4-20-SS	φ 20	#20	26.75×2.75	#25	25.4×1.8	50
DGJ-G1-25-SS	φ 25	#25	33.5×3.35	#32	31.75×1.8	20
DGJ-G1-1/4-32-SS	φ 32	#32	42.25×3.25	#40	38.1×1.8	10
DGJ-G1-1/2-38-SS	φ 38	#40	48×3.35	#50	50.8×1.8	10
DGJ-G2-51-SS	φ 51	#50	60×3.5	#70	63.5×2.5	10
DGJ-G2-1/2-64-SS	φ 64	#70	75.5×3.75	#80	76.2×3.2	5

英制直径产品尺寸表

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚	包装
Product model	Adapt hose	Thick pipe	Pipe size	Thin pipe	Pipe size	quantity
PN.	mm	mm	mm	mm	mm	Pcs/bag
DGJ-G3/8-12-SS	3/8"	3/8"	17×2.25	1/2"	15.87×1.6	50
DGJ-G1/2-15-SS	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6	50
DGJ-G3/4-20-SS	3/4"	3/4"	26.75×2.75	1"	25.4×1.8	50
DGJ-G1-25-SS	1"	1"	33.5×3.35	1-1/4"	31.75×1.8	20
DGJ-G1-1/4-32-SS	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8	10
DGJ-G1-1/2-38-SS	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8	10
DGJ-G2-51-SS	2"	2"	60×3.5	2-1/2"	63.5×2.5	10
DGJ-G2-1/2-64-	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2	5

弯角不锈钢软管弯头

DWJ stainless steel hose connector

品牌：蓝江/Land

材料：A. C. D. F为不锈钢，B. E为硅胶

外形：90度或者45度弯角

防护：IP68

温度：-40° C至100° C

特性：304或316不锈钢制成，外形美观，结构紧密，强度高，软管护套与软管相扣接紧设计，装配省时便利，抗拉力强，可防水，防尘，抗盐，耐酸碱，酒精，油脂等一般溶剂

定制：除选型手册规格外，可按照要求定制螺纹

Brand: Land

Material: B. D.E.F is stainless steel, F is silicone



shape: 90 degrees and 45 degrees

Protection: IP65

Temperature:-40 ° C to 100 ° C

Features: Made of 304 or 316 stainless steel, it has a beautiful appearance, tight structure, high strength, and a design where the hose sheath is tightly connected to the hose, making assembly time-saving and convenient. It has strong tensile strength, waterproof, dustproof, salt resistant, acid and alkali resistant, alcohol resistant, grease resistant and other general solvents

Customization: Customization can be made according to requirements

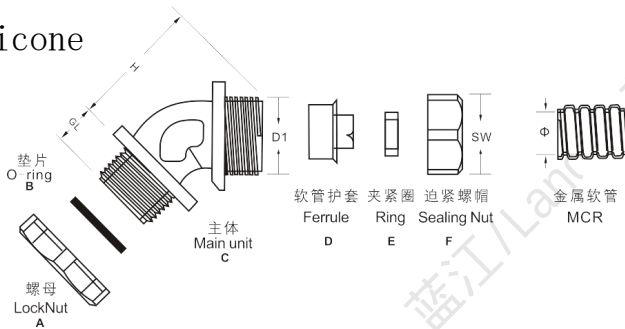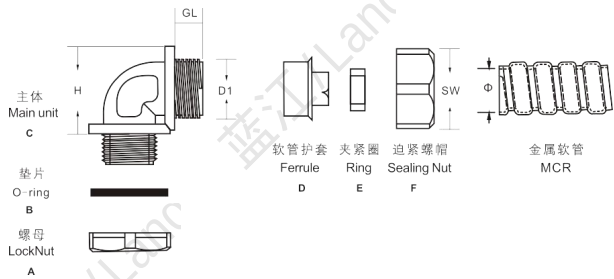

产品尺寸表M/G (PF) /NPT

蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread diameter	Thread length	quantity
PN.	Φ mm	M	AG mm	GL mm	Pcs/bag
DWJ-M16-10-SS	Φ 10	M16×1.5	16	10	50
DWJ-M20-12-SS	Φ 12	M20×1.5	20	10	50
DWJ-M20-15-SS	Φ 15	M20×1.5	20	12	50
DWJ-M20-20-SS	Φ 20	M20×1.5	20	12	50
DWJ-M25-20-SS	Φ 20	M25×1.5	25	12	50
DWJ-M32-25-SS	Φ 25	M32×1.5	32	15	20
DWJ-M40-32-SS	Φ 32	M40×1.5	40	15	10
DWJ-M50-38-SS	Φ 38	M50×1.5	50	16	10
DWJ-M63-51-SS	Φ 51	M63×1.5	63	16	5
DWJ-G3/8-10-SS	Φ 10	G3/8	16.65	10	50
DWJ-G3/8-12-SS	Φ 12	G3/8	16.65	10	50
DWJ-G1/2-15-SS	Φ 15	G1/2	20.95	12	50
DWJ-G3/4-20-SS	Φ 20	G3/4	26.44	12	50
DWJ-G1-25-SS	Φ 25	G1	33.24	15	20
DWJ-G1-1/4-32-SS	Φ 32	G1-1/4	41.91	15	10
DWJ-G1-1/2-38-SS	Φ 38	G1-1/2	47.8	15	10
DWJ-G2-51-SS	Φ 51	G2	59.61	15	5
DWJ-NPT3/8-10-SS	Φ 10	NPT3/8	16.65	10	50
DWJ-NPT3/8-12-SS	Φ 12	NPT3/8	16.65	10	50
DWJ-NPT1/2-15-SS	Φ 15	NPT1/2	20.85	12	50
DWJ-NPT3/4-20-SS	Φ 20	NPT3/4	26.3	12	50
DWJ-NPT1-25-SS	Φ 25	NPT1	33.15	15	20
DWJ-NPT1-1/4-32-SS	Φ 32	NPT1-1/4	41.85	15	10
DWJ-NPT1-1/2-38-SS	Φ 38	NPT1-1/2	47.75	15	10
DWJ-NPT2-51-SS	Φ 51	NPT2	59.55	15	5

DPJ端接式铜镀镍软管接头

DPJ Nickel Plated Brass hose connector

品牌：蓝江/Land



材料：A. C. F为铜镀镍，B. E为橡胶，D为铁皮

温度：-40° C至100° C


特性：黄铜镀镍制成，外形美观，结构紧密

Brand：Land

Material：A. C. F BRASS, B. E rubber, D iron sheet

Temperature:-40 ° C to 100 ° C

Features: Made of high-quality brass with nickel plating, it has a beautiful appearance

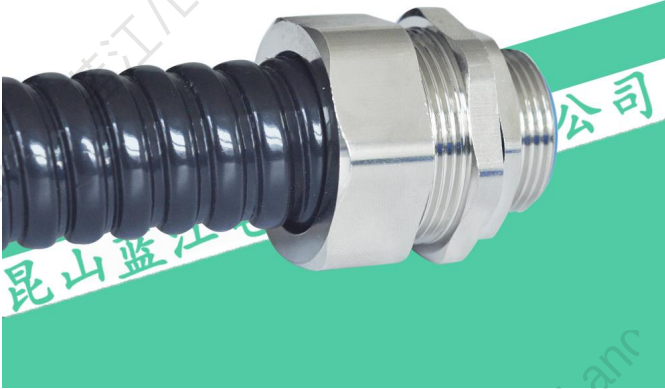

产品尺寸表M/G(PF)/NPT

蓝江产品型号	适配软管	公制螺纹	螺纹长度	扳手尺寸	包装
Product model	Adapt hose	M Thread	Thread length	Wrench Size	quantity
PN.	Φ mm	M	GL mm	cap mm	Pcs/bag
DPJ-M16B-10	Φ 10	M16×1.5	10	24	50
DPJ-M20B-12	Φ 12	M20×1.5	10	27	50
DPJ-M20B-15	Φ 15	M20×1.5	12	30	50
DPJ-M20B-20	Φ 20	M20×1.5	12	36	50
DPJ-M25B-20	Φ 20	M25×1.5	12	36	50
DPJ-M32B-25	Φ 25	M32×1.5	15	42	20
DPJ-M40B-32	Φ 32	M40×1.5	15	52	10
DPJ-M50B-38	Φ 38	M50×1.5	16	60	10
DPJ-M63B-51	Φ 51	M63×1.5	16	75	5
DPJ-G3/8B-10	Φ 10	G3/8	10	24	50
DPJ-G3/8B-12	Φ 12	G3/8	10	26	50
DPJ-G1/2B-15	Φ 15	G1/2	12	30	50
DPJ-G3/4B-20	Φ 20	G3/4	12	36	50
DPJ-G1B-25	Φ 25	G1	15	42	20
DPJ-G1-1/4B-32	Φ 32	G1-1/4	15	52	10
DPJ-G1-1/2B-38	Φ 38	G1-1/2	15	60	10
DPJ-G2B-51	Φ 51	G2	15	75	5
DPJ-NPT3/8B-10	Φ 10	NPT3/8	10	24	50
DPJ-NPT3/8B-12	Φ 12	NPT3/8	10	26	50
DPJ-NPT1/2B-15	Φ 15	NPT1/2	12	30	50
DPJ-NPT3/4B-20	Φ 20	NPT3/4	12	36	50
DPJ-NPT1B-25	Φ 25	NPT1	15	42	20
DPJ-NPT1-1/4B-32	Φ 32	NPT1-1/4	15	52	10
DPJ-NPT1-1/2B-38	Φ 38	NPT1-1/2	15	60	10
DPJ-NPT2B-51	Φ 51	NPT2	15	75	5

RG型带锁紧铜镀镍软管接头

RG locking Nickel Plated Brass hose connector



品牌：蓝江/Land

材料：A. C. F. I为铜镀镍，B. E橡胶，D尼龙，G铁皮

温度：-40° C至100° C

特性：带锁紧软管与电缆，外形美观，结构紧密



Brand: Land

Material: A. C.F.I copper nickel plating, B.E rubber, D nylon, G iron sheet

Temperature:-40 ° C to 100 ° C

Features: Can simultaneously lock cables and hoses

产品尺寸表M/G(PF)

蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度	包装
Product model	Thread size	Cable range	Adapt hose	Thread length	quantity
PN.	Metric	Φ mm	Φ mm	GL mm	Pcs/bag
RG8-M12-08	M12×1.5	4~8	Φ 8	6	50
RG8-M16-10	M16×1.5	6~10	Φ 8	7	50
RG10-M16-10	M16×1.5	6~10	Φ 10	7	50
RG12-M20-12	M20×1.5	7~12	Φ 12	7	50
RG15-M20-14	M20×1.5	8~14	Φ 15	7	50
RG20-M20-14	M20×1.5	8~14	Φ 20	7	50
RG15-M24-14	M24×1.5	8~14	Φ 15	8	50
RG20-M25-18	M25×1.5	13~18	Φ 20	8	50
RG25-M25-18	M25×1.5	13~18	Φ 25	8	50
RG25-M32-25	M32×1.5	18~25	Φ 25	9	20
RG32-M40-32	M40×1.5	25~32	Φ 32	10	10
RG38-M50-38	M50×1.5	30~38	Φ 38	12	10
RG51-M63-44	M63×1.5	36~44	Φ 51	12	10
RG64-M75-66	M75×1.5 (2)	60~66	Φ 64	15	1
RG75-M90-77	M90×1.5 (2)	70~77	Φ 75	15	1
RG15-G1/2-14	G1/2	8~14	Φ 15	8	50
RG20-G3/4-18	G3/4	13~18	Φ 20	8	50
RG25-G1-25	G1	18~25	Φ 25	9	20
RG32-G1-1/4-28	G1-1/4	22~28	Φ 32	10	10
RG38-G1-1/2-38	G1-1/2	30~38	Φ 38	10	10
RG51-G2-44	G2	36~44	Φ 51	12	10
RNPT15-NPT1/2-14	NPT1/2	8~14	Φ 15	8	50
RNPT20-NPT3/4-18	NPT3/4	13~18	Φ 20	8	50
RNPT25-NPT1-25	NPT1	18~25	Φ 25	9	20
RNPT32-NPT1-1/4-28	NPT1-1/4	22~28	Φ 32	10	10
RNPT38-NPT1-1/2-38	NPT1-1/2	30~38	Φ 38	10	10
RNPT51-NPT2-44	NPT2	36~44	Φ 51	12	10

DPJ端接式尼龙软管接头

DPJ Nylon hose connector

品牌：蓝江/Land




材料：尼龙配合三元乙丙橡胶

螺纹：M牙，G (PF) 牙，PG牙

温度：-40° C至100° C

特性：外形美观，抗拉力强，结构精密

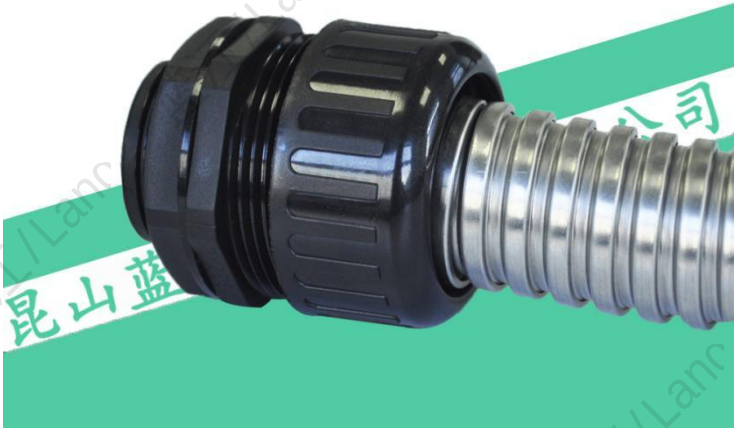

Brand: Land

Material: Nylon combined with EPDM rubber

Threads: M thread, G (PF) thread, PG thread

Temperature:-40 ° C to 100 ° C

Features: Beautiful appearance, strong tensile strength, precise structure

产品尺寸表M/G (PF) /PG

蓝江产品型号	适配软管	公制螺纹	螺纹长度	包装
Product model	Adapt hose	M Thread	Thread length	quantity
PN.	Φ mm	M	GL mm	Pcs/bag
RJ-M16-10B	Φ 10	M16×1.5	15	50
RJ-M16-12B	Φ 12	M16×1.5	15	50
RJ-M20-15B	Φ 15	M20×1.5	15	50
RJ-M25-20B	Φ 20	M25×1.5	15	50
RJ-M32-25B	Φ 25	M32×1.5	15	20
RJ-M40-32B	Φ 32	M40×1.5	15	10
RJ-M50-38B	Φ 38	M50×1.5	15	10
RJ-M63-51B	Φ 51	M63×1.5	25	10
RJ-G1/2-10B	Φ 10	G1/2	15	50
RJ-G1/2-12B	Φ 12	G1/2	15	50
RJ-G1/2-15B	Φ 15	G1/2	15	50
RJ-G3/4-20B	Φ 20	G3/4	15	50
RJ-G1-25B	Φ 25	G1	15	20
RJ-G1-1/4-32B	Φ 32	G1-1/4	15	10
RJ-G1-1/2-38B	Φ 38	G1-1/2	15	10
RJ-G2-51B	Φ 51	G2	15	10
RJ-PG16-10B	Φ 10	PG16	10	50
RJ-PG16-12B	Φ 12	PG16	10	50
RJ-PG16-15B	Φ 15	PG16	13	50
RJ-PG21-20B	Φ 20	PG21	13	50
RJ-PG29-25B	Φ 25	PG29	13	20

NGD防爆挠性连接管

Explosion proof flexible pipe



产品特点：

- 防爆挠性管由活接头与连接管组成，连接管由内管和外护套组成
- 活接头由不锈钢或者碳钢电镀处理制成
- 内管由波纹管或金属软管制成，具有良好的耐腐蚀性
- 具有阻燃、耐腐蚀、耐水、耐老化、挠性良好、结构牢固、工作可靠等特点
- 可定制螺纹，可定制长度，常规供货有500mm、700mm、1000mm，三种材质可选

技术参数：


- 执行标准：GB3836. 1, GB 3836. 2, GB 12476. 1, GB12476. 5, IEC61241-0, IEC61241-1
- 防爆标志：Ex dIIC Gb/Ex eII C Gb/Ex tD A21 IP66
- 防护等级：IP65

型号含义：

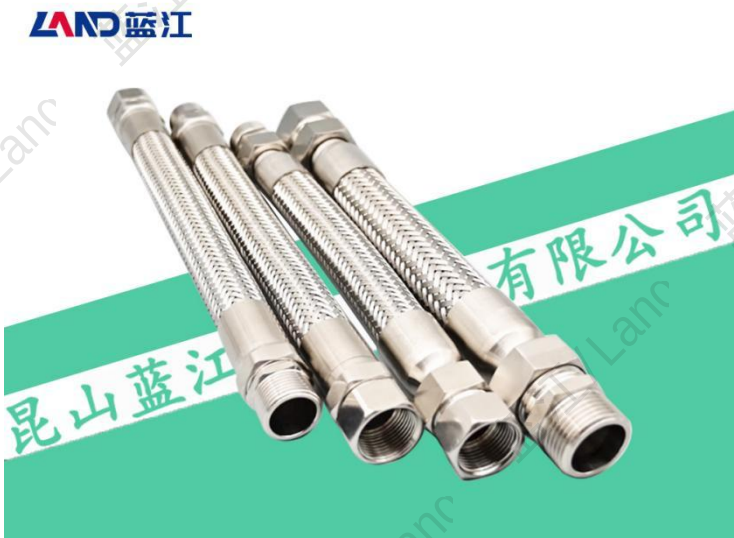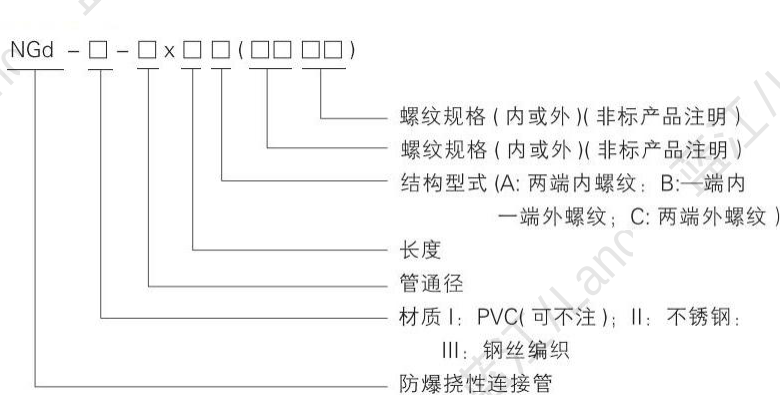

产品选型表

规格型号	接头螺纹 G			管通径 (mm)			长度 L(mm)			最小弯曲半径 (mm)
	公制	NPT	G"	I 型	II 型	III 型	I 型	II 型	III 型	
NGd- □ - □ x500 □	M20x1.5	1/2	1/2"	13	14	14	500	500	500	80
NGd- □ - □ x700 □	M20x1.5	1/2	1/2"	13	14	14	700	700	700	80
NGd- □ - □ x1000 □	M20x1.5	1/2	1/2"	13	14	14	1000	1000	1000	80
NGd- □ - □ x 500 □	M25x1.5	3/4	3/4"	19	17	17	500	500	500	110
NGd- □ - □ x700 □	M25x1.5	3/4	3/4"	19	17	17	700	700	700	110
NGd- □ - □ x1000 □	M25X1.5	3/4	3/4"	19	17	17	1000	1000	1000	110
NGd- □ - □ x500 □	M32x1.5	1	1"	23	23	23	500	500	500	146
NGd- □ - □ x700 □	M32x1.5	1	1"	23	23	23	700	700	700	145
NGd- □ - □ x1000 □	M32x1.5	1	1"	23	23	23	1000	1000	1000	145
NGd- □ - □ x500 □	M40x1.5	1 1/4	1 1/4"	28	30	30	500	500	500	180
NGd- □ - □ x700 □	M40x1.5	1 1/4	1 1/4"	28	30	30	700	700	700	180
NGd- □ - □ x1000 □	M40x1.5	1 1/4	1 1/4"	28	30	30	1000	1000	1000	180
NGd- □ - □ x500 □	M50x1.5	1 1/2	1 1/2"	32	35	35	500	500	500	210
NGd- □ - □ x700 □	M50x1.5	1 1/2	1 1/2"	32	35	35	700	700	700	210
NGd- □ - □ x1000 □	M50x1.5	1 1/2	1 1/2"	32	35	35	1000	1000	1000	210
NGd- □ - □ x500 □	M63x1.5	2	2"	40	47	47	500	500	500	250
NGd- □ - □ x700 □	M63x1.5	2	2"	40	47	47	700	700	700	250
NGd- □ - □ x1000 □	M63x1.5	2	2"	40	47	47	1000	1000	1000	250
NGd- □ - □ x700 □	M75x1.5	2 1/2	2 1/2"	-	59	59	700	700	700	350
NGd- □ - □ x 1000 □	M75x1.5	2 1/2	2 1/2"	-	59	59	1000	1000	1000	350
NGd- □ - □ x700 □	M90x2	3	3"	-	72	72	700	700	700	400
NGd- □ - □ x1000 □	M90x2	3	3"	-	72	72	1000	1000	1000	400
NGd- □ - □ x700 □	M115x2	4	4"	-	97	97	700	700	700	500
NGd- □ - □ x1000 □	M115x2	4	4"	-	97	97	1000	1000	1000	500

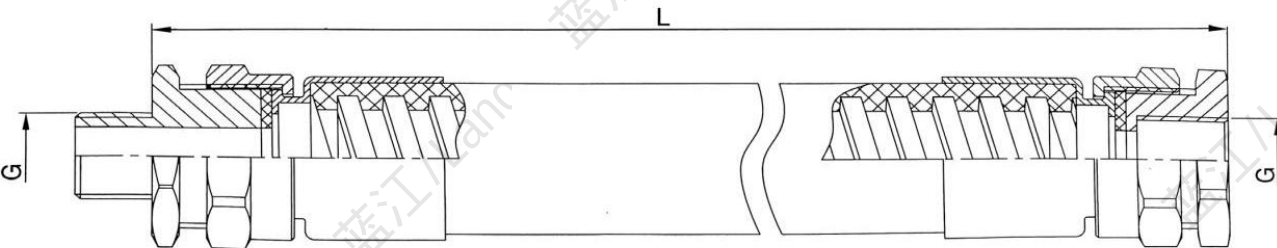

订货须知

- 若需订购防爆挠性连接管，材质为 PVC、管通径为 15mm、长度为 500mm，一端内螺纹一端外螺纹、螺纹规格为 G1/2"，则订货型号为“NGd-15 x 500B”；
- 若需订购防爆挠性连接管，材质为不锈钢、管通径为 20mm、长度为 700mm，结构型式为一端内一端外螺纹，内螺纹规格为 G3/4" 外螺纹规格为 M25x1.5, 则订货型号为 “NGd-II-20 x 700B(G3/ 内 M25x1.5 外)”。