

机器人万向侧开拖链管

Robot universal side opening drag chain tube

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS、UL94V-0

性能：耐磨性好，三维万向可伸缩，扭转，弯曲

应用：工业机器人，协作机器人，自动化设备



Brand: Land/Winlink


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS、UL94V-0

Performance:Wear resistant, stretchable, twisting, bending


Applications: Industrial robots, collaborative robots etc



产品选型参数表

蓝江产品型号	内部宽度		最大电缆直径		外径	弯曲半径
Product model	inner width		Maximum cable		outside	bending
PN.	L1 mm	L2 mm	D1 mm	D2 mm	L mm	mm
WLK-RGTL-30K	12	10	10	8	34	50
WLK-RGTL-38K	15	13	13	11	42	58
WLK-RGTL-48K	19	16	16	14	54	80
WLK-RGTL-57K	22	19	20	17	65	87
WLK-RGTL-70K	28	24	26	22	80	110
WLK-RGTL-95K	37	32	35	30	108	145

安装尺寸

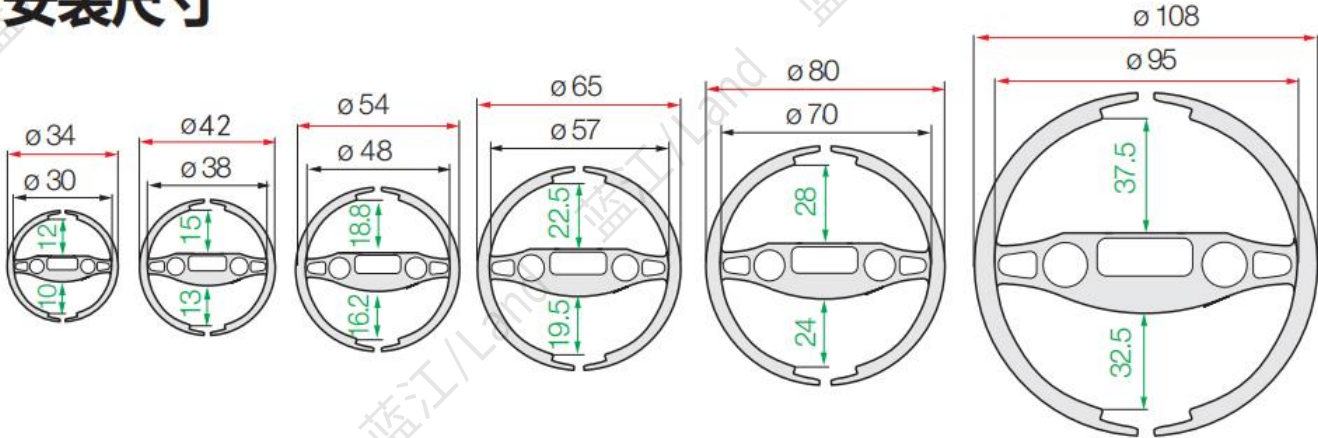

机器人万向封闭拖链管

Robot universal closed drag chain tube

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS、UL94V-0

性能：耐磨性好，三维万向可伸缩，扭转，弯曲

应用：工业机器人，协作机器人，自动化设备



Brand: Land/Winlink


Material: Modified Nylon

Color: Black

Authentication: CE、ROHS、UL94V-0

Performance:Wear resistant, stretchable, twisting, bending


Applications: Industrial robots, collaborative robots etc



产品选型参数表

蓝江产品型号	内部宽度		最大电缆直径		外径	弯曲半径
Product model	inner width		Maximum cable		outside	bending
PN.	L1 mm	L2 mm	D1 mm	D2 mm	L mm	mm
WLK-RGTL-30B	12	10	10	8	34.5	50
WLK-RGTL-38B	15	13	13	11	43	58
WLK-RGTL-48B	19	16	16	14	54	80
WLK-RGTL-57B	22	19	20	17	65	87
WLK-RGTL-70B	28	24	26	22	81	110
WLK-RGTL-95B	37	32	35	30	108	145

安装尺寸

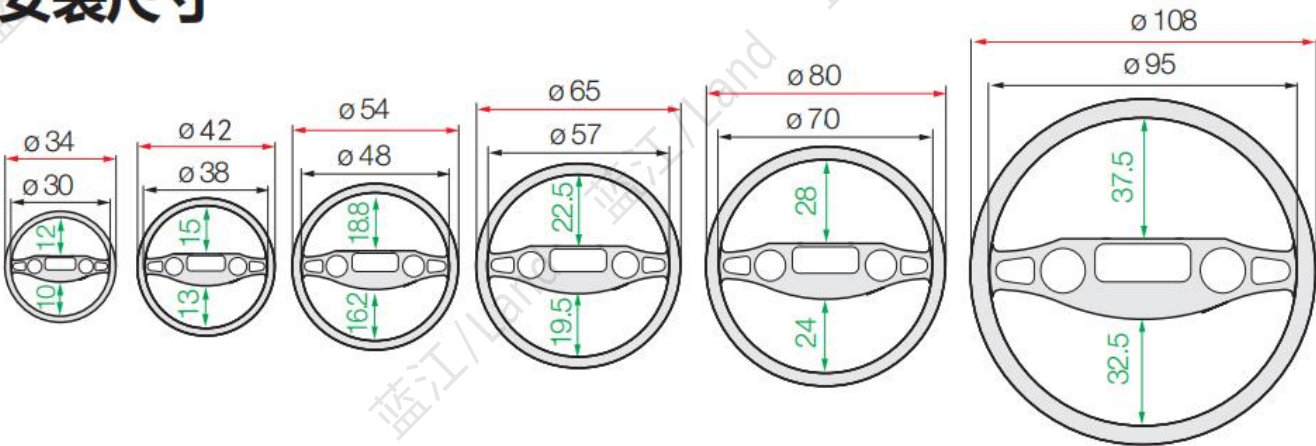

标准柔性机器人软管

Standard flexible robot hose

品牌：蓝江/Winlink


材料：聚氨酯（PUR）

颜色：黑色、蓝色

认证：CE、ROHS

性能：高回弹性，耐折弯，耐摩擦，耐扭曲

应用：工业机器人，协作机器人，自动化设备

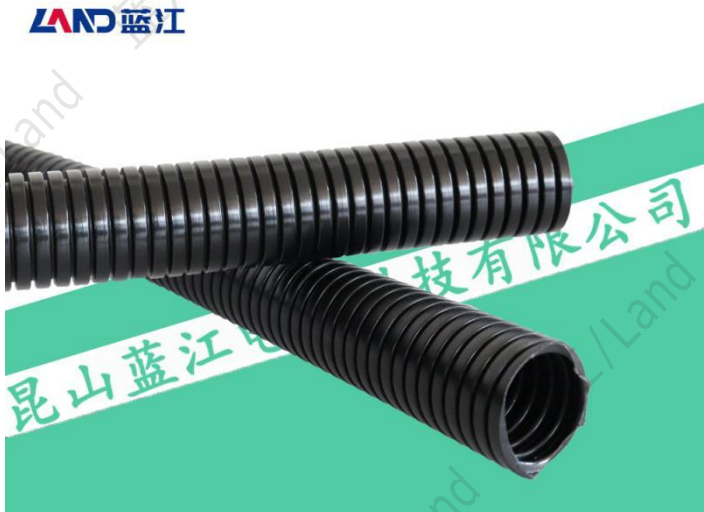

Brand: Land/Winlink


Material: PUR

Color: Black, Blue

Authentication: CE、ROHS

Performance:High resilience, bending resistance, friction resistance, and torsion resistance

Applications: Industrial robots, collaborative robots

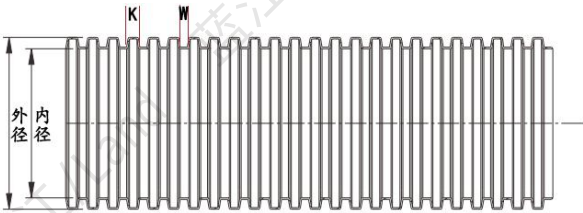

产品选型参数表

蓝江产品型号	内径×外	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-RG-PUR-17B	17×21.0	3.2	2.2	1	0.6	40	100
WLK-RG-PUR-20B	20×25.0	4.4	3	1.4	0.7	40	50
WLK-RG-PUR-23B	23×28.2	4.4	3	1.4	0.7	45	50
WLK-RG-PUR-28B	28×34.2	6.3	4	2.3	0.8	55	50
WLK-RG-PUR-36B	36×42.3	7	5.2	1.8	0.9	65	30
WLK-RG-PUR-48B	48×54.0	7	5.2	1.8	0.9	80	30
WLK-RG-PUR-56B	56×67.2	7	5	2	1.2	100	30
WLK-RG-PUR-70B	70×80.0	8.5	5.5	3	1.2	120	30
WLK-RG-PUR-95B	95×106	8.5	5.5	3	1.2	150	10

高柔性机器人软管

High flexibility robot hose

品牌：蓝江/Winlink

材料：改性聚氨酯（PUR）

颜色：黑色、蓝色

认证：CE、ROHS

性能：高柔软性，耐折弯，耐摩擦，耐扭曲

应用：工业机器人，协作机器人，自动化设备



Brand: Land/Winlink


Material: modified polyurethane

Color: Black, Blue

Authentication: CE、ROHS

Performance:High flexibility, bending resistance, friction resistance, and torsion resistance

Applications: Industrial robots, collaborative robots

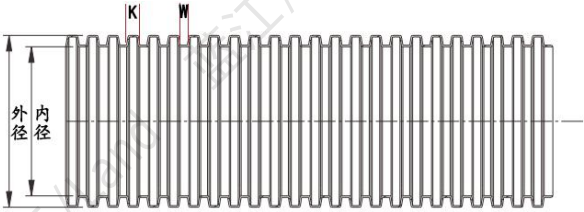

产品选型参数表

蓝江产品型号	内径×外	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-RG-PUR-17R	17×21.0	3.2	2.2	1	0.6	30	100
WLK-RG-PUR-20R	20×25.0	4.4	3	1.4	0.7	30	50
WLK-RG-PUR-23R	23×28.2	4.4	3	1.4	0.7	35	50
WLK-RG-PUR-28R	28×34.2	6.3	4	2.3	0.8	45	50
WLK-RG-PUR-36R	36×42.3	7	5.2	1.8	0.9	55	30
WLK-RG-PUR-48R	48×54.0	7	5.2	1.8	0.9	70	30
WLK-RG-PUR-56R	56×67.2	7	5	2	1.2	90	30
WLK-RG-PUR-70R	70×80.0	8.5	5.5	3	1.2	100	30
WLK-RG-PUR-95R	95×106	8.5	5.5	3	1.2	120	10

细纹高柔机器人软管

High flexibility fine tooth robot hose

品牌：蓝江/Winlink



材料：改性聚氨酯（PUR）

颜色：黑色、蓝色

认证：CE、ROHS

性能：高柔软性，细节距，耐折弯，耐摩擦，耐扭曲

应用：工业机器人，协作机器人，自动化设备



Brand: Land/Winlink


Material: modified polyurethane

Color: Black, Blue

Authentication: CE、ROHS

Performance:High flexibility, detail distance, bending resistance, friction resistance, and torsion resistance

Applications: Industrial robots, collaborative robots

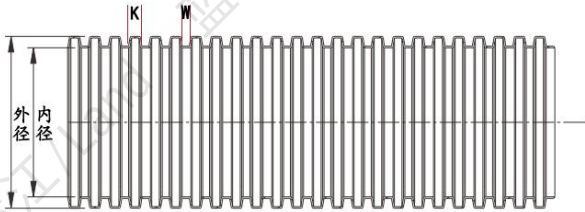

产品选型参数表

蓝江产品型号	内径×外径	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat. r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-RG-PUR-23XR	23×28.2	3.3	2.2	1.1	0.7	35	50
WLK-RG-PUR-28XR	28×34.5	4.0	2.5	1.5	0.8	45	50
WLK-RG-PUR-36XR	36×42.3	3.8	2.2	1.6	0.9	50	30
WLK-RG-PUR-48XR	48×54.0	6.0	3.5	2.5	0.9	65	30
WLK-RG-PUR-70XR	70×80.0	6.5	3.3	3.2	1.2	95	30

PA12耐摩机器人软管

PA12 Friction resistant robot hose

品牌：蓝江/Winlink

材料：改性尼龙12

颜色：黑色、蓝色

认证：CE、ROHS

性能：高耐摩擦，硬度高，耐冲击

应用：工业机器人，协作机器人，自动化设备



Brand: Land/Winlink


Material: Modified Nylon 12

Color: Black, Blue

Authentication: CE、ROHS

Performance:High friction resistance, high hardness, and impact resistance

Applications: Industrial robots, collaborative robots

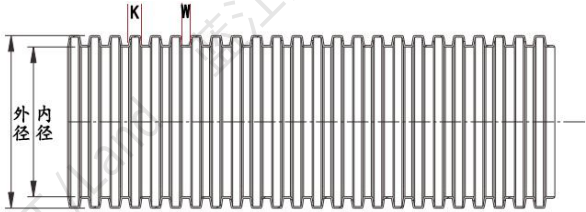

产品选型参数表

蓝江产品型号	内径×外	节距	波段K/W		壁厚	弯曲半径	整卷包装
Product model	ID*OD	pitch	公差±0.2mm		thick	Stat.r	Packing
PN.	mm	mm	K值	W值	mm	mm	M/ring
WLK-PA12-17B	17×21.0	3.2	2.2	1	0.6	50	100
WLK-PA12-20B	20×25.0	4.4	3	1.4	0.7	50	50
WLK-PA12-23B	23×28.2	4.4	3	1.4	0.7	55	50
WLK-PA12-28B	28×34.2	6.3	4	2.3	0.8	65	50
WLK-PA12-36B	36×42.3	7	5.2	1.8	0.9	75	30
WLK-PA12-48B	48×54.0	7	5.2	1.8	0.9	90	30
WLK-PA12-56B	56×67.2	7	5	2	1.2	110	30
WLK-PA12-70B	70×80.0	8.5	5.5	3	1.2	130	30
WLK-PA12-95B	95×106	8.5	5.5	3	1.2	160	10

万能配球固定支架

Universal ball matching fixed bracket

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：单扣球形适配器，锁紧后可万向转动

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管、机器人波纹管

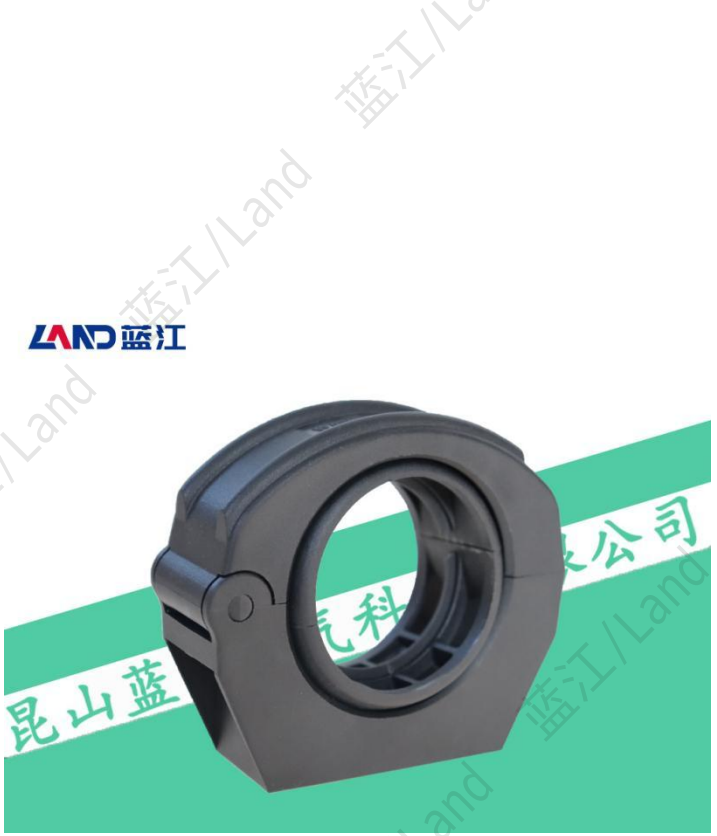

Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Single button spherical adapter, can rotate universally after locking

Applications: Industrial robots, collaborative robots etc

Adaptation: Robot drag chain, robot hose

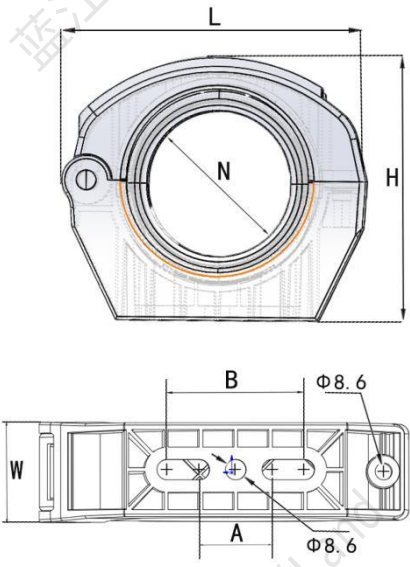

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGTLR-30A	R30	28×34.2	82	33	72	30~33	36	10
WLK-RGTLR-38A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGTLR-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGTLR-57A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGTLR-70A	R70	70×80.0	150	38	135	30~56	88	5

软管配球固定支架

Hose ball fixing bracket

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：多扣球形适配器，锁紧软管万向转动

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管

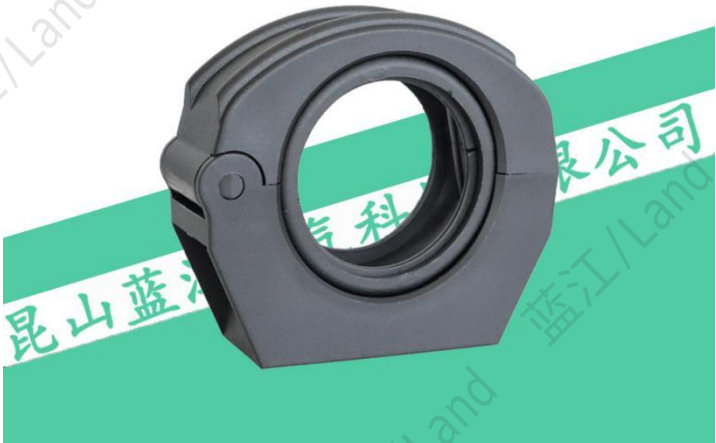

Brand: Land/Winlink

Material: Modified Nylon



Color: Black

Authentication: CE、ROHS

Performance: Multi buckle spherical adapter, locking
hose universal rotation

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

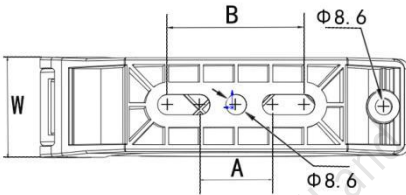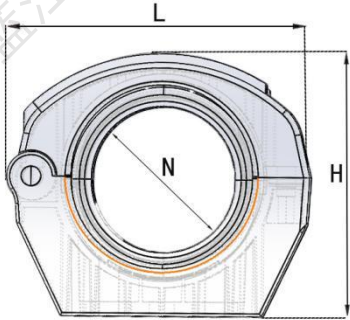

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGHQ-23A	23×28.2	82	34	72	30~33	27	10
WLK-RGHQ-28A	28×34.2	82	34	72	30~33	32	10
WLK-RGHQ-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGHQ-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGHQ-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGHQ-70A	70×80.0	150	38	135	30~56	72	5
WLK-RGHQ-95A	95×106	188	49	170	52/89	97	5

软管定位固定支架

Hose positioning and fixing bracket

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：固定软管方向位置，耐摩擦，抗拉性强

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管

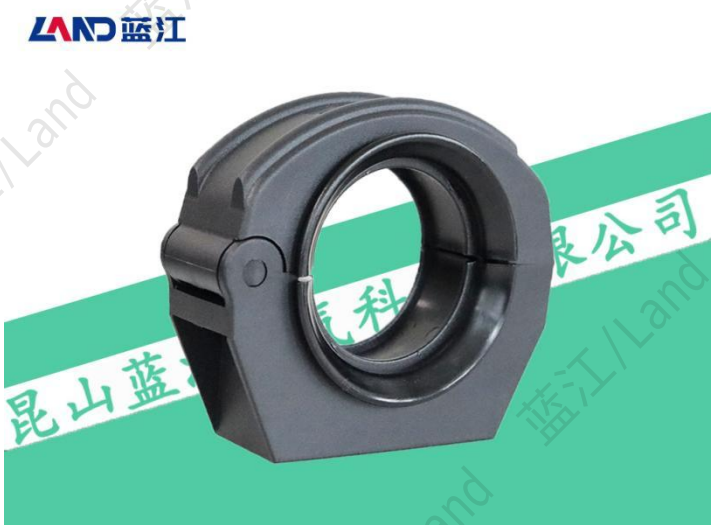

Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Fixed hose direction and position, friction resistant, strong tensile strength

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

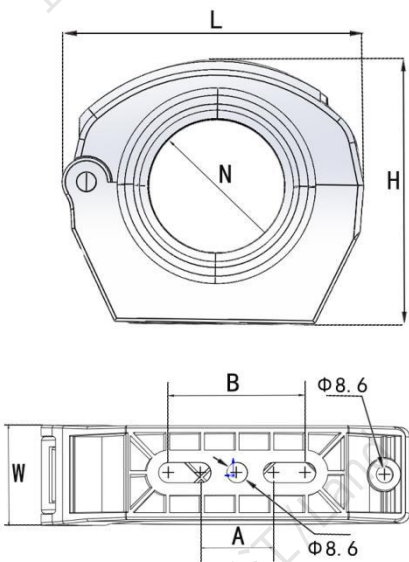

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGQDW-23A	23×28.2	82	34	72	30~33	27	10
WLK-RGQDW-28A	28×34.2	82	34	72	30~33	32	10
WLK-RGQDW-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGQDW-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGQDW-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGQDW-70A	70×80.0	150	38	135	30~56	72	5

导向滑动固定座支架

Guided sliding fixed seat bracket

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：双头喇叭口设计，内壁光滑，软管可自由伸缩滑动

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管、机器人波纹管

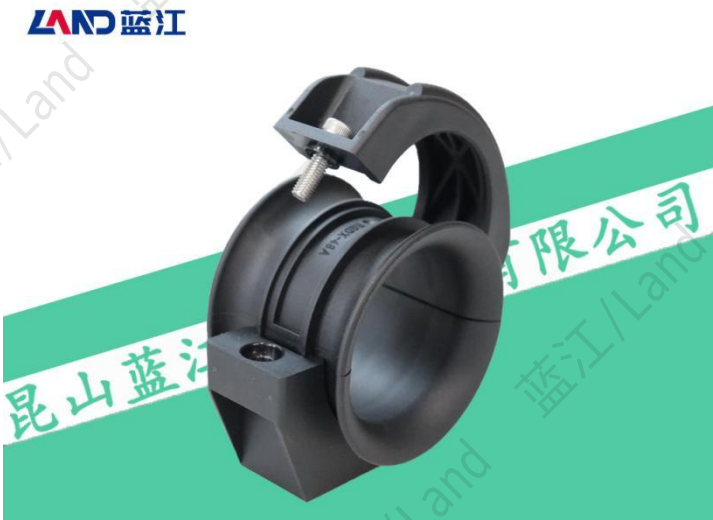

Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Double headed horn mouth design, smooth inner wall, flexible hose can freely expand and slide

Applications: Industrial robots, collaborative robots et

Adaptation: Robot drag chain, robot hose

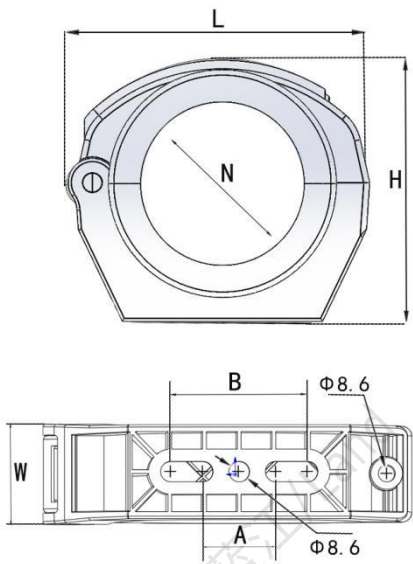

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGZD-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGZD-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGZD-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGZD-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGZD-70A	R70	70×80.0	150	38	135	30~56	88	5

套筒前末端固定支架

Sleeve front end hose bracket

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：喇叭口端接软管，分线器端出线，用于
机器人前末端，耐磨擦，抗拉力强

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管

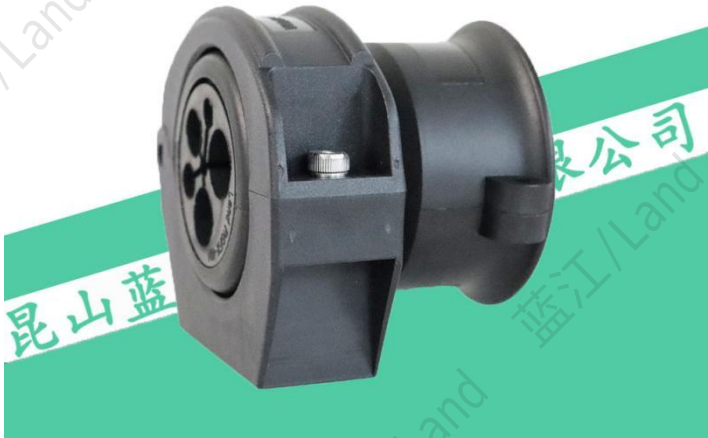

Brand: Land/Winlink

Material: Modified Nylon

Color: Black


Authentication: CE、ROHS

Performance:The horn end is connected to a hose, and
the splitter end is used for the front end of the robot.

It is wear-resistant and has strong tensile strength

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

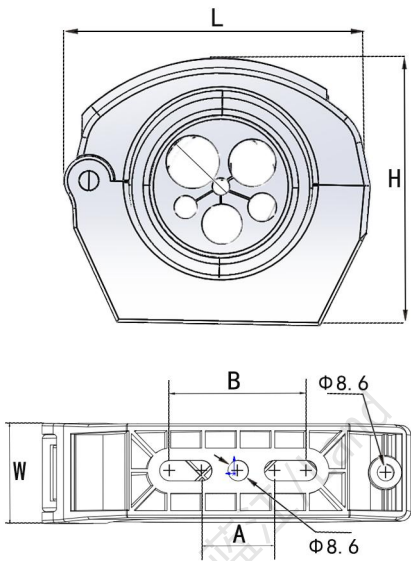

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长. L	厚. W	高. H	孔数N	A~B mm	PCS
WLK-RGQFW-23A	23×28.2	82	34	72	定制	30~33	10
WLK-RGQFW-28A	28×34.2	82	34	72	定制	30~33	10
WLK-RGQFW-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGQFW-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGQFW-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGQFW-70A	70×80.0	150	38	135	13孔	30~56	5

机器人拖链前端支架

drag chain front end bracket

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：机器人前端节点对拖链进行固定并出线

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管、机器人波纹管

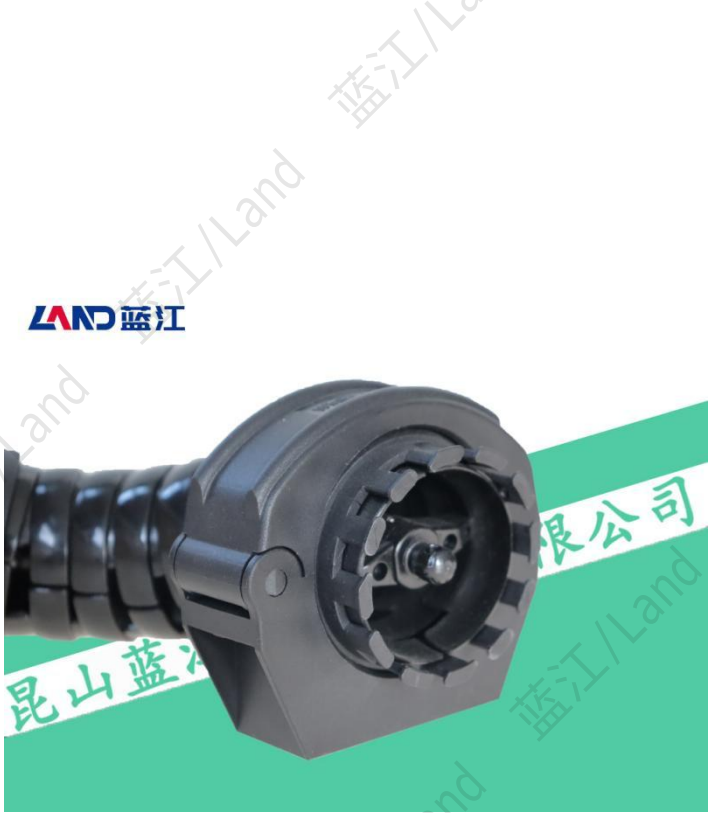

Brand: Land/Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance:The front-end node of the robot fixes the drag chain and leads it out

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGTFW-30A	R30	28×34.2	82	33	72	30~33	36	10
WLK-RGTFW-38A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGTFW-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGTFW-57A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGTFW-70A	R70	70×80.0	150	38	135	30~56	88	5

配球前末端固定支架

Ball front end hose bracket

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：用于机器人前端，配合固定软管并出线

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance:Used for robot front-end, in conjunction with fixed hoses and outgoing lines

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

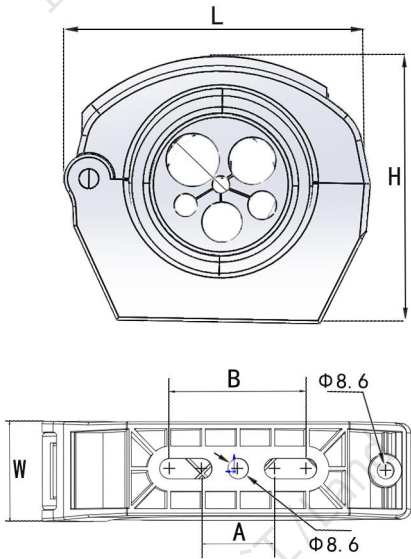

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长. L	厚. W	高. H	孔数N	A~B mm	PCS
WLK-RGQFX-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGQFX-48A	48×54.0	105	33	93	7孔	30~44	10
WLK-RGQFX-56A	56×67.2	150	38	135	10孔	30~56	5
WLK-RGQFX-70A	70×80.0	150	38	135	10孔	30~56	5

旋转万能配球支架

Rotating ball hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝


颜色：黑色

认证：CE、ROHS

性能：以铝万向旋转盘为底座，连接万能配球固定座支架，可以实现跟随机器人万向旋转

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链，机器人波纹管

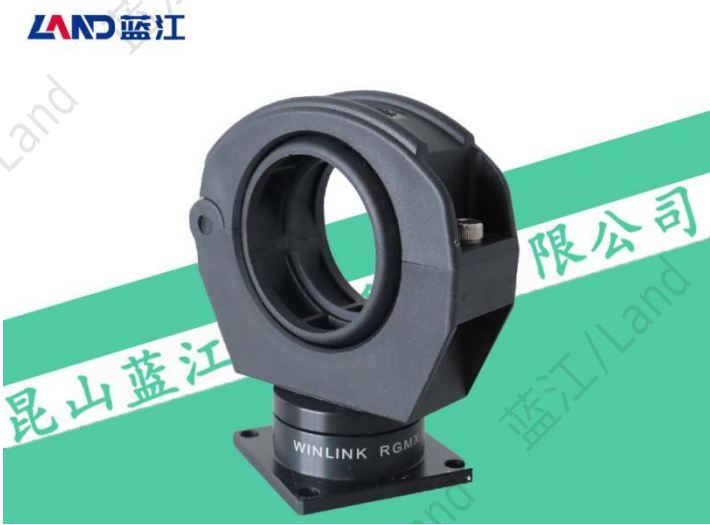

Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance:Using an aluminum universal rotating disc as the base and connecting it to a ball mounting bracket, it can achieve universal rotation following the robot

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

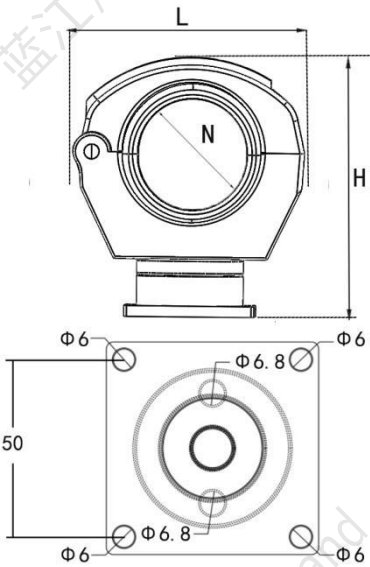

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底盘孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	厚.W	高.H	mm	内径.N	PCS
WLK-RGMXQ-23A	/	23×28.2	82	34	99	50	27	10
WLK-RGMXQ-28A	R30	28×34.2	82	34	99	50	32	10
WLK-RGMXQ-36A	R38	36×42.3	105	33	120	50	37	10
WLK-RGMXQ-48A	R48	48×54.0	105	33	120	50	48.5	10
WLK-RGMXQ-56A	R57	56×67.2	150	38	162	50	63	5
WLK-RGMXQ-70A	R70	70×80.0	150	38	162	50	72	5

旋转软管配球支架

Rotating ball hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝万向旋转盘为底座，连接配球固定座支架，可以实现跟随机器人万向旋转

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance:Using an aluminum universal rotating disc as the base and connecting it to a ball mounting bracket, it can achieve universal rotation following the robot

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

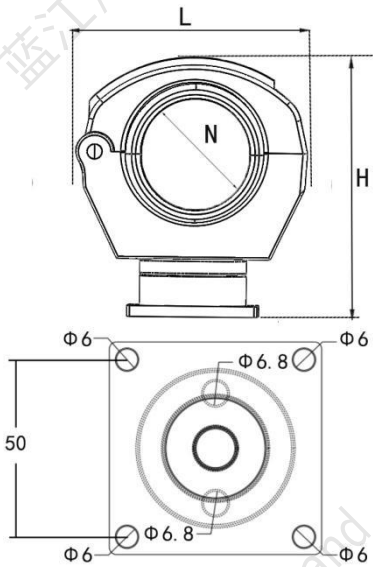

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底盘孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	厚.W	高.H	mm	内径.N	PCS
WLK-RGQMX-23A	23×28.2	82	34	99	50	27	10
WLK-RGQMX-28A	28×34.2	82	34	99	50	32	10
WLK-RGQMX-36A	36×42.3	105	33	120	50	37	10
WLK-RGQMX-48A	48×54.0	105	33	120	50	48.5	10
WLK-RGQMX-56A	56×67.2	150	38	162	50	63	5
WLK-RGQMX-70A	70×80.0	150	38	162	50	72	5

旋转滑动导向支架

Rotating sliding hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝


颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接导向固定座支架，可以实现跟随机器人万向旋转

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管、机器人波纹管

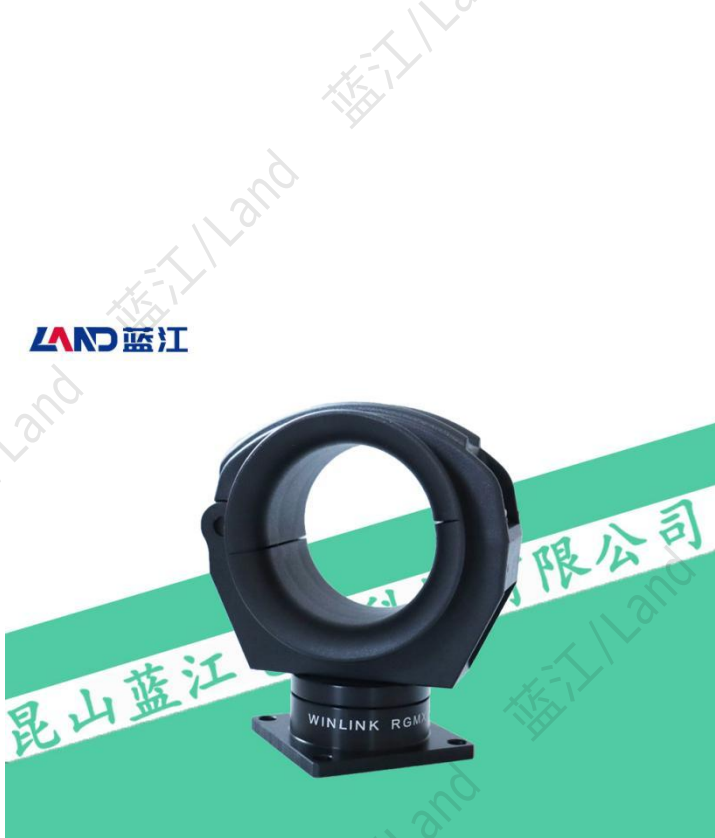

Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance:Using an aluminum universal rotating disc as the base and connecting it to a guide fixed bracket, it can achieve universal rotation following the robot

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

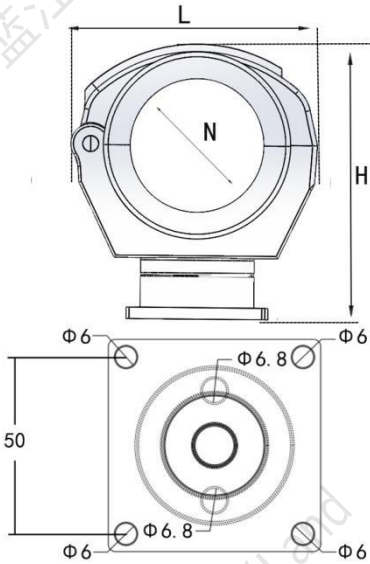

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDMX-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDMX-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDMX-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDMX-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDMX-70A	R70	70×80.0	150	38	135	30~56	88	5

旋转套筒前末端支架

Rotating front end hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接前末端固定座支架，可以实现跟随机器人万向旋转

应用：工业机器人，协作机器人，自动化设备等

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance: Using an aluminum universal rotating disc as the base and connecting it to the front end fixed bracket, it can achieve universal rotation following the robot

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

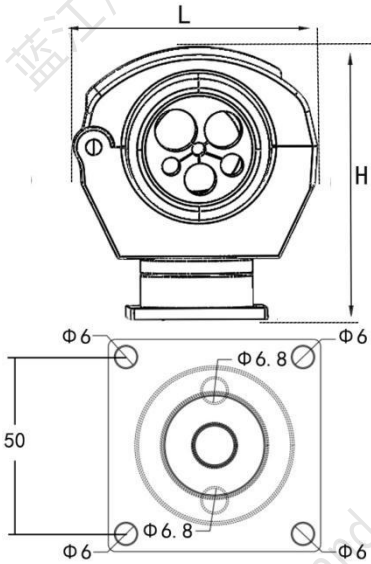

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底盘孔距	孔数	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	holes	Packing
PN.	AD	长.L	厚.W	高.H	A~B mm	N	PCS
*WLK-RGFMX-23A	23×28.2	82	34	99	50	定制	10
WLK-RGFMX-28A	28×34.2	82	34	99	50	定制	10
WLK-RGFMX-36A	36×42.3	105	33	120	50	6孔	10
WLK-RGFMX-48A	48×54.0	105	33	120	50	6孔	10
WLK-RGFMX-56A	56×67.2	150	38	162	50	13孔	5
WLK-RGFMX-70A	70×80.0	150	38	162	50	13孔	5

旋转带爪前末端支架

Rotating claw front end bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接带爪前末端固定座支架，可以实现跟随机器人万向旋转

应用：工业机器人，协作机器人，自动化设备等

适配：机器人拖链管，机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance:Using an aluminum universal rotating disc as the base and connecting it to the front end fixed bracket, it can achieve universal rotation following the robot

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底盘孔距	孔数	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	holes	Packing
PN.	AD	AD	长.L	厚.W	高.H	A~B mm	N	PCS
*WLK-RGMXF-23A	/	23×28.2	82	34	99	50	定制	10
WLK-RGMXF-28A	R30	28×34.2	82	34	99	50	定制	10
WLK-RGMXF-36A	R38	36×42.3	105	33	120	50	6孔	10
WLK-RGMXF-48A	R48	48×54.0	105	33	120	50	6孔	10
WLK-RGMXF-56A	R57	56×67.2	150	38	162	50	13孔	5
WLK-RGMXF-70A	R70	70×80.0	150	38	162	50	13孔	5

旋转分线前末端支架

Front end bracket for rotating dividing line

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：以铝制万向旋转盘为底座，连接分线前末端固定座支架，可以实现跟随机器人万向旋转

应用：工业机器人，协作机器人，自动化设备等

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance:Using an aluminum universal rotating disc as the base and connecting it to the front end fixed bracket, it can achieve universal rotation following the robot

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底盘孔距	孔数	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	holes	Packing
PN.	AD	长. L	厚. W	高. H	A~B mm	N	PCS
WLK-RGEMX-23A	23×28.2	82	34	99	50	定制	10
WLK-RGEMX-28A	28×34.2	82	34	99	50	定制	10
WLK-RGEMX-36A	36×42.3	105	33	120	50	6孔	10
WLK-RGEMX-48A	48×54.0	105	33	120	50	6孔	10
WLK-RGEMX-56A	56×67.2	150	38	162	50	13孔	5
WLK-RGEMX-70A	70×80.0	150	38	162	50	13孔	5

铝万能配球固定支架

Aluminum universal ball fixing bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝


颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管、机器人波纹管

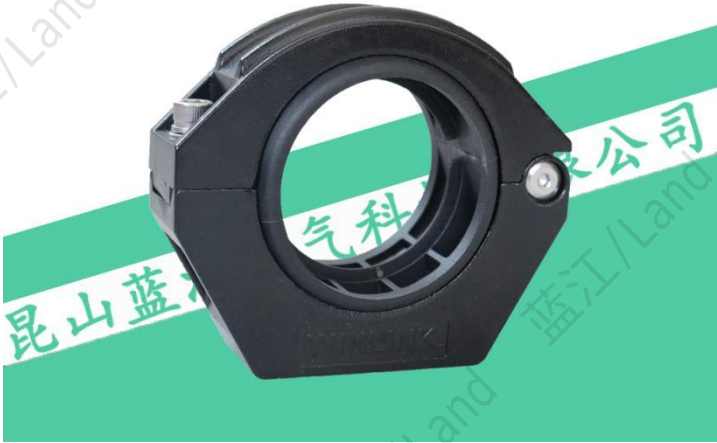

Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum integrated stamping, corrosion-resistant, lightweight

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

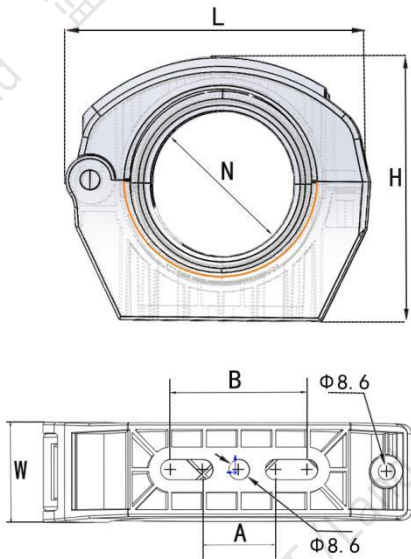

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长. L	宽. W	高. H	A~B mm	内径. N	PCS
WLK-RGTLV-30A	R30	28×34.2	82	33	72	30~33	36	10
WLK-RGTLV-38A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGTLV-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGTLV-57A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGTLV-70A	R70	70×80.0	150	38	135	30~56	88	5

铝软管配球固定支架

Aluminum hose ball fixing bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝


颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管

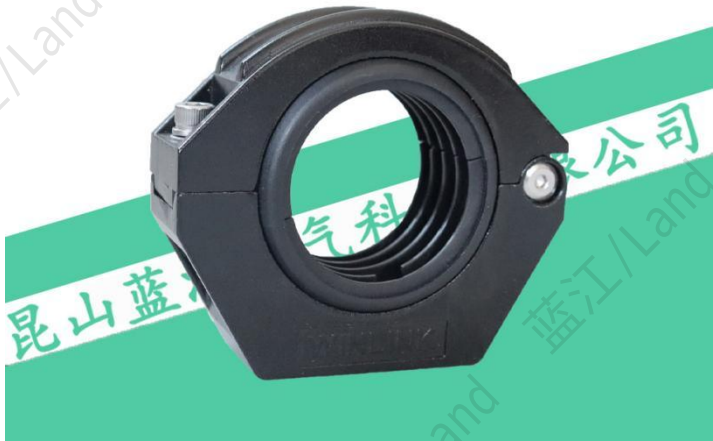

Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum integrated stamping, corrosion-resistant, lightweight

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

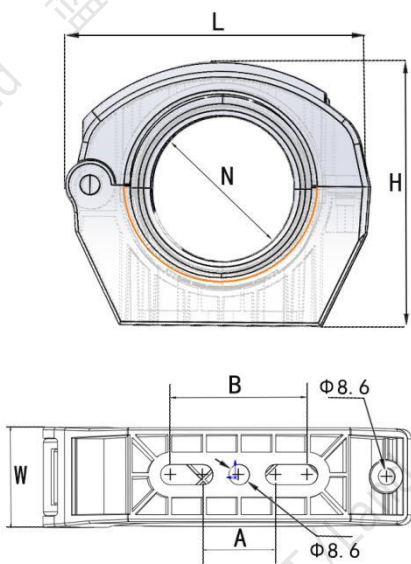

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGQLV-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGQLV-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGQLV-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGQLV-70A	70×80.0	150	38	135	30~56	72	5

铝定位固定支架

Aluminum positioning bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance: 6061 aluminum integrated stamping, corrosion-resistant, lightweight

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

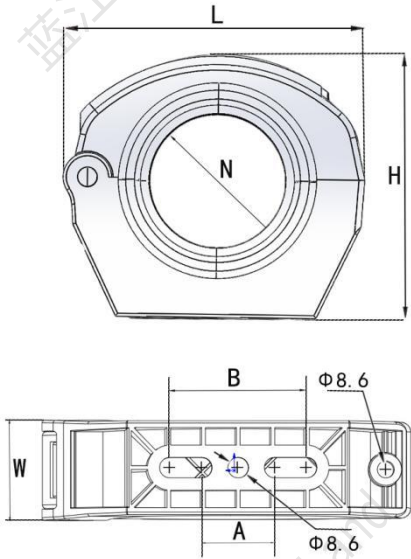

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGWLV-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGWLV-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGWLV-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGWLV-70A	70×80.0	150	38	135	30~56	72	5

铝导向滑动固定支架

Aluminum guided sliding fixed bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管、机器人波纹管



Brand: Land/Winlink

Material:Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance:6061 aluminum integrated stamping, corrosion-resistant, lightweight

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

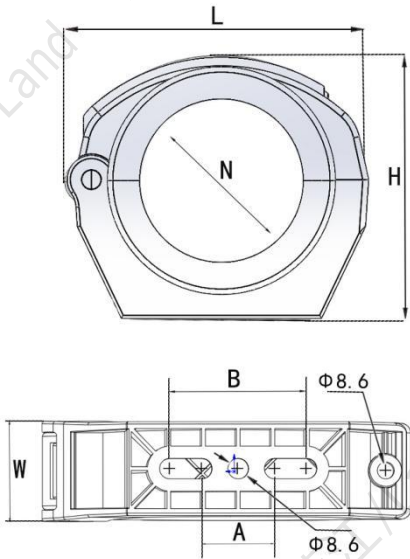

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDLV-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDLV-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDLV-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDLV-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDLV-70A	R70	70×80.0	150	38	135	30~56	88	5

铝套筒前末端固定支架

Aluminum front end bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink

Material:Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance:6061 aluminum integrated stamping,
corrosion-resistant, lightweightth

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

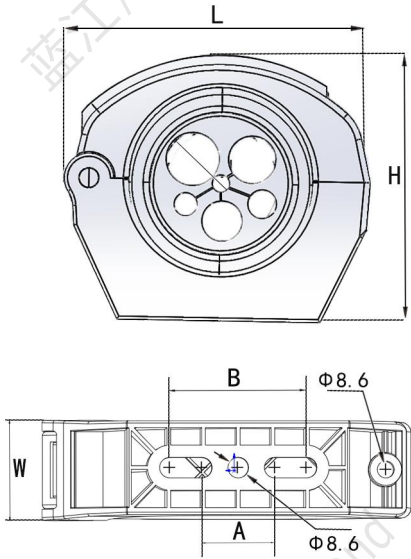

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长. L	厚. W	高. H	孔数N	A~B mm	PCS
WLK-RGFLV-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGFLV-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGFLV-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGFLV-70A	70×80.0	150	38	135	13孔	30~56	5

铝带爪前末端固定支架

Aluminum strip claw front end fixed bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝


颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链，机器人波纹管

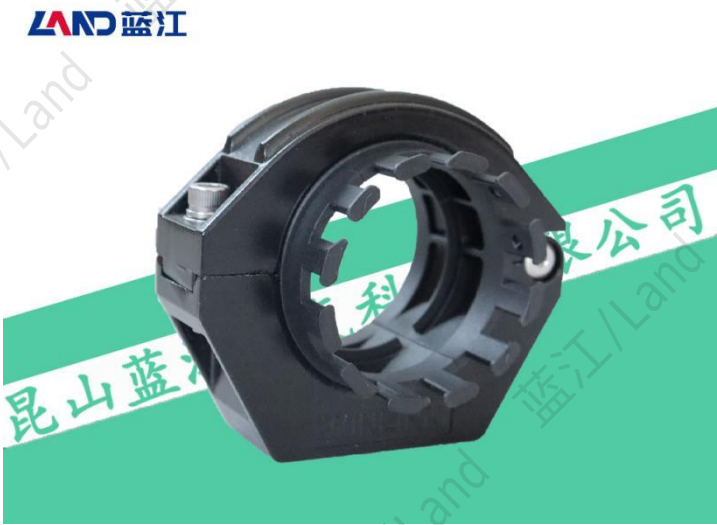

Brand: Land/Winlink

Material:Modified Nylon and Aluminum

Color: Black

Authentication: CE、ROHS

Performance:6061 aluminum integrated stamping,
corrosion-resistant, lightweightth

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配拖链	适配软管	支架主体尺寸			底座孔距	内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGZLV-30A	R30	28×34.2	82	33	72	30~33	36	10
WLK-RGZLV-38A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGZLV-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGZLV-57A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGZLV-70A	R70	70×80.0	150	38	135	30~56	88	5

铝配球前末端分线支架

Aluminum ball front end splitter bracket

品牌：蓝江/Winlink

材料：改性尼龙与铝

颜色：黑色

认证：CE、ROHS

性能：6061铝一体冲压而成，耐腐蚀，轻量化

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink

Material:Modified Nylon and Aluminum


Color: Black

Authentication: CE、ROHS

Performance:6061 aluminum integrated stamping,
corrosion-resistant, lightweightth

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

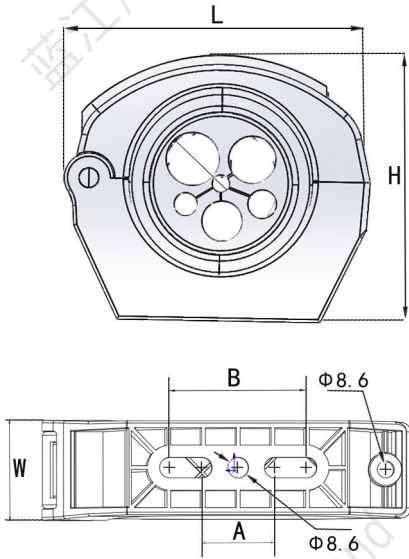

产品选型参数表

蓝江产品型号	适配软管	支架主体尺寸				底座孔距	包装
Product model	Adapt hose	Bracket size(±1)				size(±0.5)	Packing
PN.	AD	长.L	厚.W	高.H	孔数N	A~B mm	PCS
WLK-RGXLV-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGXLV-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGXLV-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGXLV-70A	70×80.0	150	38	135	13孔	30~56	5

协作万能配球抱箍支架

Collaborative ball hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人关键节点抱紧，并固定锁紧软管

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链，机器人波纹管



Brand: Land/Winlink


Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the key nodes of the robot and secure the locking hose

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

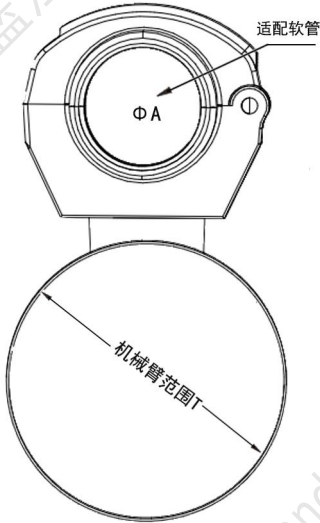

产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	AD	Φ A	PCS	T mm		
WLK-RGTLQ-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGTLQ-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGTLQ-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGTLQ-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGTLQ-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGTLQ-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作软管配球抱箍支架

Collaborative ball hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人关键节点抱紧，并固定锁紧软管

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink


Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: Tighten the key nodes of the robot and secure the locking hose

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

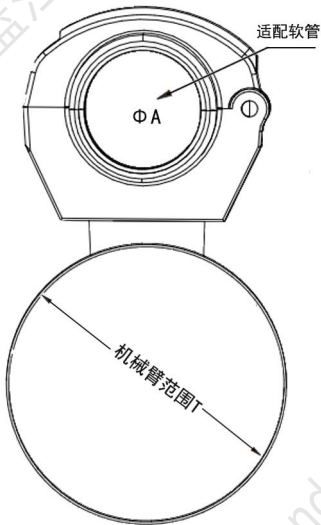

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
WLK-RGCPQ-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPQ-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPQ-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPQ-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPQ-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPQ-70A	70×80.0	5	162-174mm	其它接受定制	

协作滑动导向固定支架

Collaborative sliding hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人关键节点抱紧，软管可以自由伸缩

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链，机器人波纹管



Brand: Land/Winlink


Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: The key nodes of the robot are tightly held, allowing the hose to expand and contract freely

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

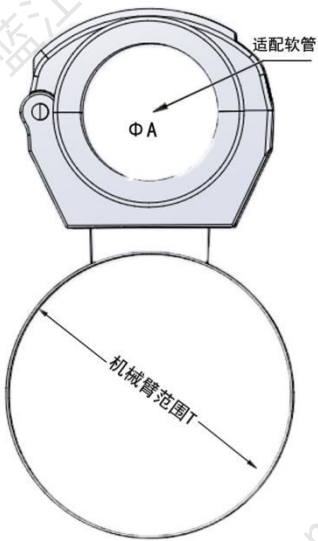

产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	AD	Φ A	PCS	T mm		
*WLK-RGCPD-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
*WLK-RGCPD-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPD-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPD-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPD-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPD-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作定位固定软管支架

Collaborative fixed hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人关键节点抱紧，可以固定锁紧软管

应用：工业机器人，协作机器人，自动化设备等

适配：机器人波纹管



Brand: Land/Winlink


Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance:The key nodes of the robot are tightly held, and the locking hose can be fixed

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

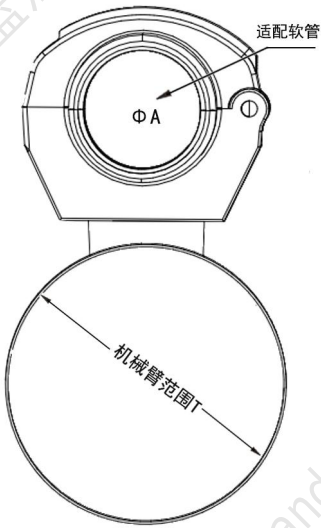

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
*WLK-RGCPW-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
*WLK-RGCPW-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPW-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPW-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
*WLK-RGCPW-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPW-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端套筒抱箍支架

Collaborative front end hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人关键节点抱紧，固定软管并出线

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink


Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance:The key nodes of the robot are tightly held, and the hose can be fixed and wired out

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

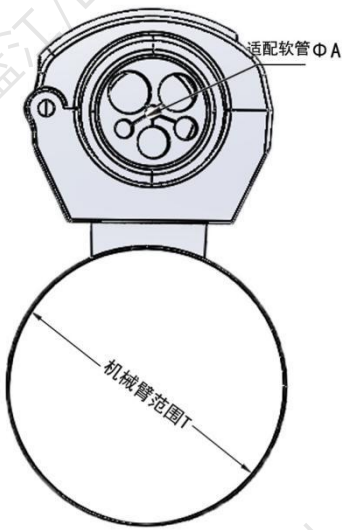

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
*WLK-RGCPF-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPF-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPF-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPF-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPF-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPF-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端配球分线支架

Collaborative front end hose bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人关键节点抱紧，固定软管并出线

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink


Material: Modified Nylon and Stainless Steel

Authentication: CE、ROHS

Performance: The key nodes of the robot are tightly held, and the hose can be fixed and wired out

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

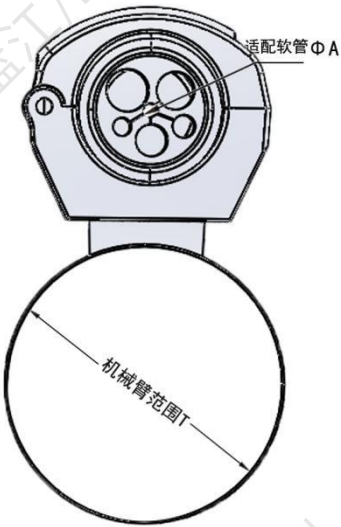

产品选型参数表

蓝江产品型号	适配软管	包装	可选锁紧范围		
Product model	Adapt hose	Packing	Locking range		
PN.	Φ A	PCS	T mm		
*WLK-RGCQF-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
*WLK-RGCQF-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCQF-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCQF-48A	48×54.0	10	104-112mm	113-121m	122-130mm
WLK-RGCQF-56A	56×67.2	5	131-139mm	140-148m	149-161mm
WLK-RGCQF-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端带爪抱箍支架

Collaborative drag chain front-end bracket

品牌：蓝江/Winlink

材料：改性尼龙与不锈钢

认证：CE、ROHS

性能：机器人前端手臂抱紧，并锁紧软管出线

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链，机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon, stainless steel

Authentication: CE、ROHS

Performance:The front arm of the robot is tightly held, locking the hose outlet

Applications: Industrial robots, collaborative robot

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配拖链	适配软管	包装	可选锁紧范围		
Product model	drag chain	Adapt hose	Packing	Locking range		
PN.	Φ A	Φ A	PCS	T mm		
WLK-RGTLF-30A	R30	28×34.2	10	56-59mm	60-63mm	64-67mm
WLK-RGTLF-38A	R38	36×42.3	10	68-73mm	74-79mm	80-85mm
WLK-RGTLF-48A	R48	48×54.0	10	86-91mm	92-97mm	98-103mm
WLK-RGTLF-57A	R57	56×67.2	10	104-112mm	113-121mm	122-130mm
WLK-RGTLF-70A	R70	70×80.0	5	131-139mm	140-148mm	149-161mm

机器人魔术贴绑带

Robot Hose tie

品牌：蓝江/Winlink

材料：尼龙魔术贴

颜色：黑色，其他定制

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，能有效束紧软管与包线布

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管，机器人包线布



Brand: Land/Winlink

Material: hook and loop

Color: Black, Other Customization

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models, effectively tightening hoses and wrapping fabrics

Applications: Industrial robots, collaborative robots

Adaptation: Robot hose, robot wrapping cloth

产品选型参数表

蓝江产品型号	绑带长度	绑带宽度	单根最大捆扎直径	包装
Product model	Strap length	Strap width	Maximum bundling diameter	Packing
PN.	mm	mm	mm	PCS
WLK-RGPB-L500	500	25	$136 \geq \phi$	10
WLK-RGPB-L600	600	25	$168 \geq \phi$	10
WLK-RGPB-L700	700	25	$200 \geq \phi$	10
WLK-RGPB-L800	800	25	$230 \geq \phi$	10

协作绑带软管固定座

Collaborative strap hose fixing seat

品牌：蓝江/Winlink

材料：尼龙魔术贴与改性橡胶

颜色：黑色，其他定制

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，橡胶块防滑设计，能有效束紧软管

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管



Brand: Land/Winlink

Material: Nylon Velcro and Modified Rubber

Color: Black, Other Customization

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip can effectively tighten the hose

Applications: Industrial robots, collaborative robots

Adaptation: Robot hose

产品选型参数表

蓝江产品型号	威联科产品型号			
	WLK-RGCPB-L500	WLK-RGCPB-L600	WLK-RGCPB-L700	WLK-RGCPB-L800
Product model	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
φ 17*21.0	≤98	≤130	≤162	≤193
φ 20*25.0	≤98	≤130	≤162	≤193
φ 23*28.2	≤98	≤130	≤162	≤193
φ 28*34.2	≤95	≤128	≤160	≤191
φ 36*42.3	≤85	≤116	≤148	≤180
φ 48*54.0	≤80	≤112	≤145	≤175
φ 56*67.2	≤65	≤96	≤128	≤160
φ 70*80.0	≤50	≤80	≤110	≤145

协作绑带定位支架

Collaborative strap positioning bracket

品牌：蓝江/Winlink


材料：尼龙魔术贴与改性橡胶

颜色：黑色

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，橡胶块防滑设计配合定位环，能有效束紧软管

应用：工业机器人，协作机器人，自动化设备

适配：机器人波纹管

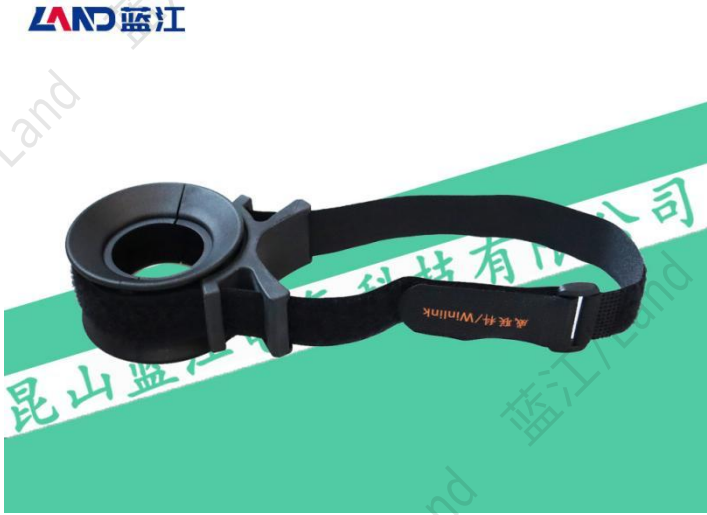

Brand: Land/Winlink

Material: Nylon Velcro and Modified Nylon

Color: Black

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip design, combined with a positioning ring, can effectively tighten hoses

Applications: Industrial robots, collaborative robots

Adaptation: Robot hose

产品选型参数表

蓝江产品型号	绑带锁紧范围			
Product model	L500	L600	L700	L800
PN.	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
WLK-RGCPK-36-L	≤50	≤82	≤114	≤146
WLK-RGCPK-48-L	≤50	≤82	≤114	≤146

协作绑带滑动支架

Collaborative strap sliding bracket

品牌：蓝江/Winlink



材料：尼龙魔术贴与改性尼龙

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，橡胶块防滑设计配合导向套筒，可使软管能够自由伸缩

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链，机器人波纹管



Brand: Land/Winlink

Material: Nylon Velcro and Modified Nylon

Performance: This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip design, combined with the guide sleeve, allows the hose to freely expand and contract

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	绑带锁紧范围			
	L500	L600	L700	L800
Product model	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
WLK-RGCPH-36-L	≤50	≤82	≤114	≤146
WLK-RGCPH-48-L	≤50	≤82	≤114	≤146

协作绑带配球固定座

Binding hose fixing bracket

品牌：蓝江/Winlink



材料：尼龙魔术贴与改性尼龙

性能：本款魔术贴绑带束紧范围大，可通用各类协作机器人型号，配合支架可有效锁紧软管

适配：机器人拖链，机器人波纹管



Brand: Land/Winlink

Material: Nylon Velcro and Modified Nylon

Performance:Wide tightening range, compatible with various collaborative robot models, and the bracket can effectively lock the hose

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配软管	束紧范围	绑带长度	包装
Product model	Adapt hose	Locking range	Strap length	Packing
PN.	AD	mm	mm	PCS
WLK-RGCPQ-23A-L500	23×28.2	≤98	500	10
WLK-RGCPQ-28A-L500	28×34.2	≤95	500	10
WLK-RGCPQ-36A-L500	36×42.3	≤85	500	10
WLK-RGCPQ-48A-L500	48×54.0	≤80	500	10
WLK-RGCPQ-23A-L600	23×28.2	≤130	600	10
WLK-RGCPQ-28A-L600	28×34.2	≤128	600	10
WLK-RGCPQ-36A-L600	36×42.3	≤116	600	10
WLK-RGCPQ-48A-L600	48×54.0	≤112	600	10
WLK-RGCPQ-23A-L700	23×28.2	≤162	700	10
WLK-RGCPQ-28A-L700	28×34.2	≤160	700	10
WLK-RGCPQ-36A-L700	36×42.3	≤148	700	10
WLK-RGCPQ-48A-L700	48×54.0	≤145	700	10
WLK-RGCPQ-23A-L800	23×28.2	≤193	800	10
WLK-RGCPQ-28A-L800	28×34.2	≤191	800	10
WLK-RGCPQ-36A-L800	36×42.3	≤180	800	10
WLK-RGCPQ-48A-L800	48×54.0	≤175	800	10

单尼龙固定支架

Single nylon fixed bracket

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE，ROHS

性能：通配WINLINK管线包零部件产品

应用：工业机器人，协作机器人

Brand: Land/Winlink

Material: Modified Nylon



Color: Black

Authentication: CE、ROHS

Performance:Tongpai Weilianke Pipeline Package

Parts Products

Applications: Industrial robots, collaborative robots

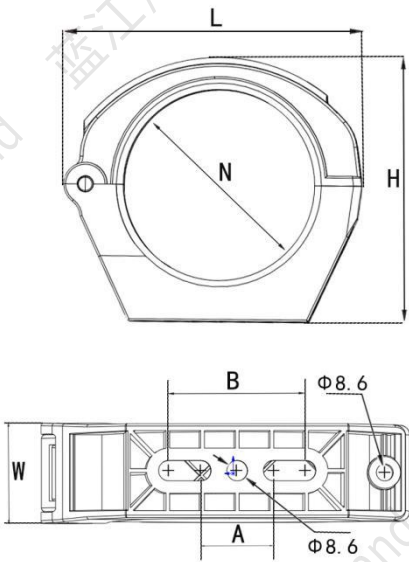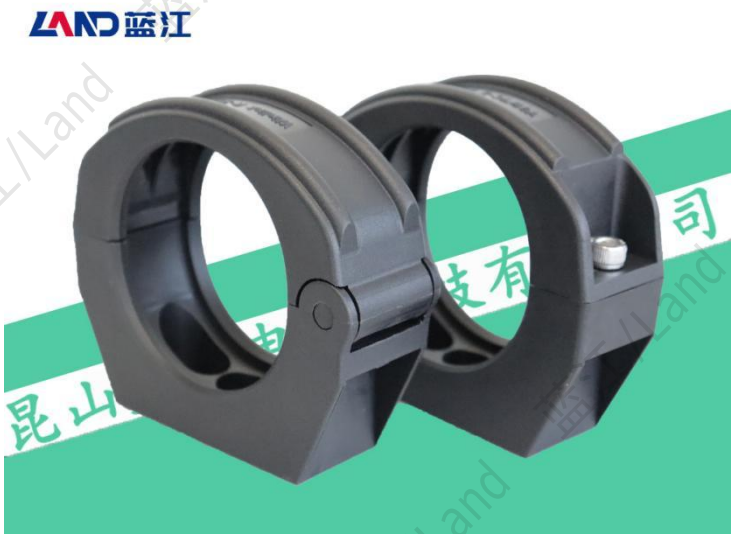

产品选型参数表

蓝江产品型号	适配内夹	支架本体尺寸			底座孔距	内径	包装
Product model	Adapt clamp	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	M	长.L	厚.W	高.H	A~B mm	N mm	PCS
WLK-RGQM-23/28A	R23/28	82	34	72	30~33	45	10
WLK-RGQM-36/48A	R36/48	105	33	93	30~44	65	10
WLK-RGQM-56/70A	R56/70	150	38	135	30~56	99	5
WLK-RGQM-95A	R95	188	49	170	52/89	120	5

单铝制固定支架

Single aluminum fixed bracket

品牌：蓝江/Winlink

材料：铝制

颜色：黑色

性能：6061铝一体冲压而成，耐腐蚀，轻量化
通配WINLINK管线包零部件产品

应用：工业机器人，协作机器人，自动化设备




Brand: Land/Winlink

Material: aluminium

Color: Black

Performance: 6061 aluminum one-piece stamping,
corrosion-resistant, lightweight, compatible
with WINLINK pipeline package parts products

Applications: Industrial robots, collaborative robots

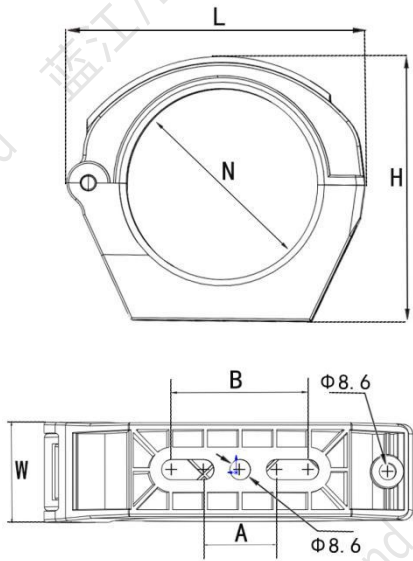

产品选型参数表

蓝江产品型号	适配内夹	支架主体尺寸			底座孔距	内径	包装
Product model	Adapt clamp	Bracket size(±1)			size(±0.5)	inside	Packing
PN.	A	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGLV-36/48A	R36/48	105	31	93	30~44	65	10
WLK-RGLV-56/70A	R56/70	150	38	135	30~56	99	5

多功能摩擦球

Multi purpose friction ball

品牌：蓝江/Winlink

材料：改性尼龙

认证：符合CE和ROHS

颜色：黑色

性能：耐摩擦与撞击，钢性强，耐腐蚀性好

应用：工业机器人，协作机器人

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon



Authentication: CE、ROHS

Color: Black

Performance:Resistant to friction and impact, strong rigidity, and good corrosion resistance

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

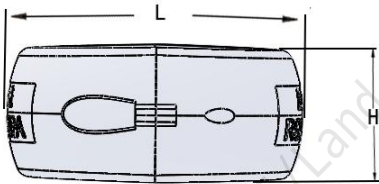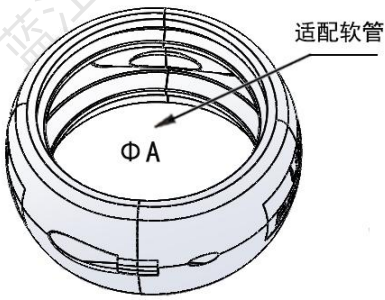

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	Φ A	长. L	高. H	N mm	PCS
WLK-RGQ-23A	23×28.2	53	35	27	50
WLK-RGQ-28A	28×34.2	53	35	32	50
WLK-RGQ-36A	36×42.3	70	47	37	20
WLK-RGQ-48A	48×54.0	70	36	48.5	20
WLK-RGQ-56A	56×67.2	103	47	63	5
WLK-RGQ-70A	70×80.0	103	47	72	5
WLK-RGQ-95A	95×106.0	126	66	97	1

万能通用摩擦球

Universal friction ball

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：耐摩擦，可转动，钢性强，耐腐蚀性好

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管，机器人波纹管

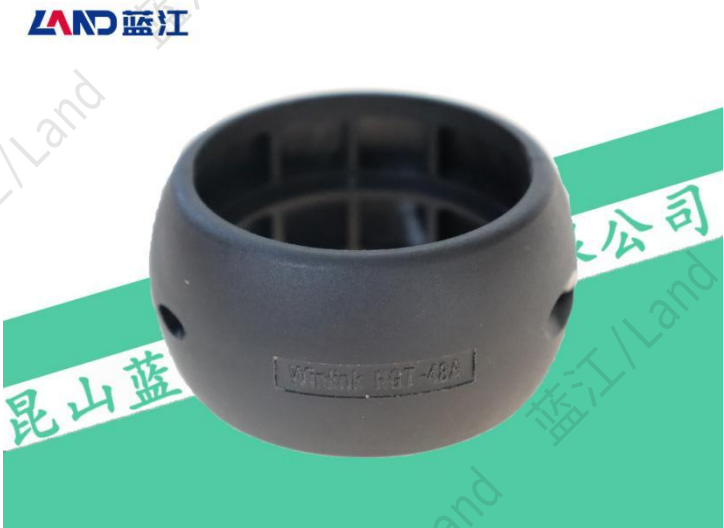

Brand: Land/Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance:Install friction balls at key nodes of the drag chain to protect it

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

产品选型参数表

蓝江产品型号	适配拖链	适配软管	配件主体尺寸		内径	包装
Product model	drag chain	Adapt hose	Bracket size(±1)		inside	Packing
PN.	Φ A	Φ A	长. L	高. H	N mm	PCS
WLK-RGT-23A	/	23×28.2	53	35	27	50
WLK-RGT-28A	R30	28×34.2	53	35	32	50
WLK-RGT-36A	R38	36×42.3	70	47	37	20
WLK-RGT-48A	R48	48×54.0	70	36	48.5	20
WLK-RGT-56A	R57	56×67.2	103	47	63	5
WLK-RGT-70A	R70	70×80.0	103	47	72	5

定位环内夹

Hose fixing ring

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，固定软管

应用：工业机器人，协作机器人

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets to secure hoses

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

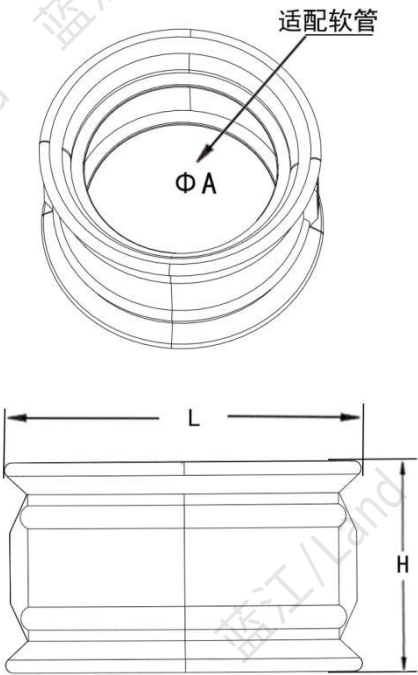

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGDW-36A	36×42.3	71	42	37	20
WLK-RGDW-48A	48×54.0	71	42	48.5	20
WLK-RGDW-56A	56×67.2	104	44	63	10
WLK-RGDW-70A	70×80.0	104	44	72	10

滑动导向套筒

Hose sliding sleeve

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，使软管在套筒内可自由滑动伸缩

应用：工业机器人，协作机器人

适配：机器人波纹管，机器人拖链管

Brand: Land/Winlink

Material: Modified Nylon



Color: Black

Authentication: CE、ROHS

Performance: Supporting fixed bracket integrated guiding fixed bracket, flexible hose can slide freely, double horn mouth design, smooth inner wall

Applications: Industrial robots, collaborative robots

Adaptation: Robot drag chain, robot hose

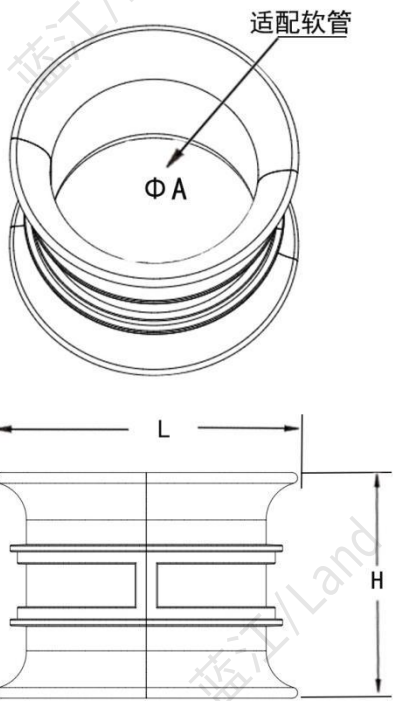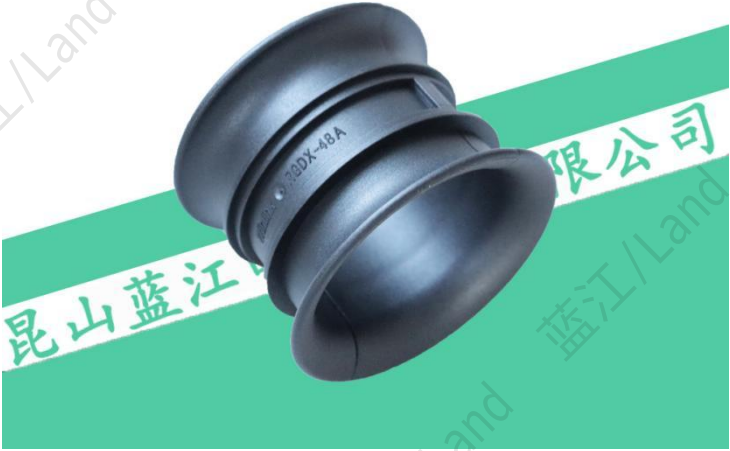

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGDX-28A	28×34.2	60	50	36	20
WLK-RGDX-36A	36×42.3	80	60	45	20
WLK-RGDX-48A	48×54.0	80	60	58	20
WLK-RGDX-56A	56×67.2	112	62	88	10
WLK-RGDX-70A	70×80.0	112	62	88	10

喇叭口前端套筒

Front end sleeve

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，用于六轴

应用：工业机器人，协作机器人

适配：机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets, for six axes

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

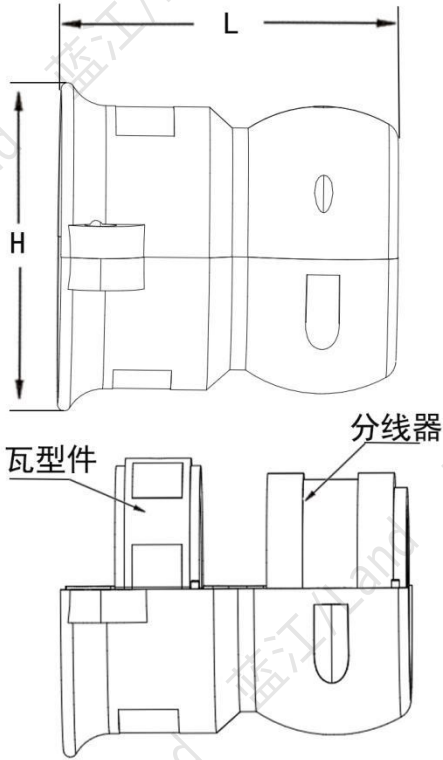

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		球径	包装
Product model	Adapt hose	Bracket size(±1)		Size	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGQD-28A	28×34.2	57	53	53	50
WLK-RGQD-36/48A	36×42.3	83	84	69	10
WLK-RGQD-56/70A	56×67.2	107	109	103	5

活动瓦型件

Robot tile shaped parts

品牌：蓝江/Winlink

材料：改性尼龙


颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用，用于六轴

应用：工业机器人，协作机器人

适配：机器人波纹管

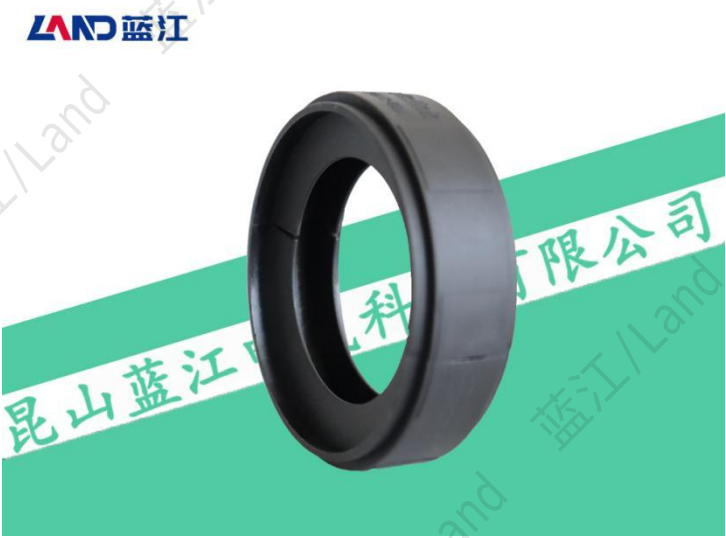

Brand: Land/Winlink

Material: Modified Nylon


Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets, for six axes

Applications: Industrial robots, collaborative robots

Adaptation: robot hose

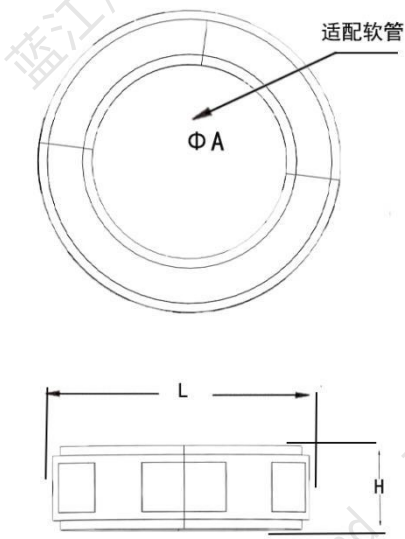

产品选型参数表

蓝江产品型号	适配软管	配件主体尺寸		内径	包装
Product model	Adapt hose	Bracket size(±1)		inside	Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGWX-36A	36×42.3	62	20	39	50
WLK-RGWX-48A	48×54.0	62	20	50	50
WLK-RGWX-56A	56×67.2	92	28	60	20
WLK-RGWX-70A	70×80.0	92	28	74	20

套筒用分线器

Socket internal splitter

品牌：蓝江/Winlink


材料：改性橡胶

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合支架使用在六轴分线

应用：工业机器人，协作机器人

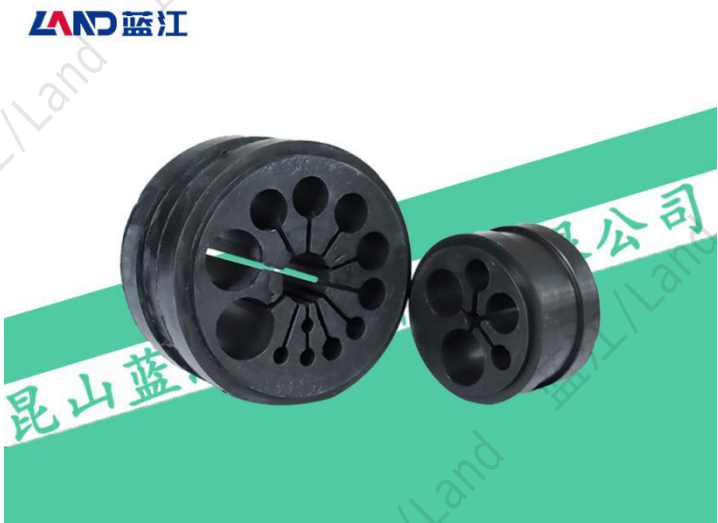

Brand: Land/Winlink



Material: Modified rubber

Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with brackets, for dividing lines

Applications: Industrial robots, collaborative robots

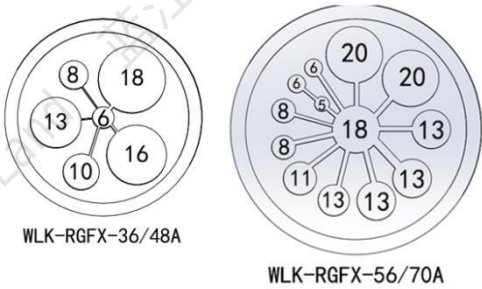

产品选型参数表

蓝江产品型号	配件主体尺寸		多孔尺寸	包装
Product model	Bracket size(±1)		Multi hole size	Packing
PN.	长.L	高.H	mm	PCS
WLK-RGFX-28A	39.0	22.0	实心款，可定制开孔	10
WLK-RGFX-36/48A	54.5	32.5	标准款：18/16/13/10/8/6	10
WLK-RGFX-56/70A	84.0	43.0	标准款：2*20/18/4*13/11/2*8/2*6/5	5

摩擦球分线器

Friction ball splitter

品牌：蓝江/Winlink

材料：改性橡胶

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配合摩擦球使用在六轴分线

应用：工业机器人，协作机器人



Brand: Land/Winlink


Material: Modified rubber

Color: Black

Authentication: CE、ROHS

Performance: Pipe package accessories, used in conjunction with friction balls for six axis branch lines

Applications: Industrial robots, collaborative robots

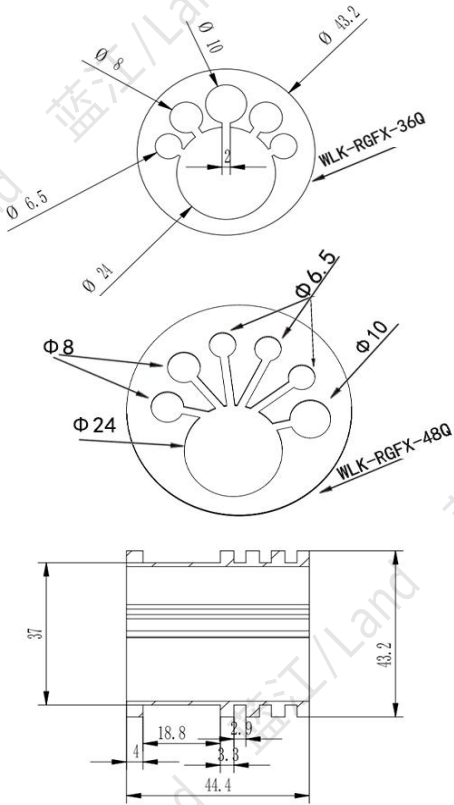

产品选型参数表

蓝江产品型号	配件主体尺寸		多孔尺寸	包装
Product model	Bracket size(±1)		Multi hole size	Packing
PN.	长.L	高.H	mm	PCS
WLK-RGFX-36Q	44	43	标准：24/10/2*8/2*6.5	10
WLK-RGFX-48Q	44	43	标准：24/10/2*8/3*6.5	10
WLK-RGFX-70Q	44	43	标准：4*19.5/16/4*13/9	5

前端配爪球套

Drag chain front end ball sleeve

品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色

认证：CE、ROHS

性能：管线包配件，配套支架使用于六轴分线

应用：工业机器人，协作机器人，自动化设备

适配：机器人拖链管，机器人波纹管



Brand: Land/Winlink

Material: Modified Nylon

Color: Black

Authentication: CE、ROHS

Performance: Pipeline package accessories, matched with brackets for use in six axis distribution lines

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	适配拖链	适配软管	整袋包装
Product model	drag chain	Adapt hose	package
PN.	ϕ A	ϕ A	pcs
WLK-RGF-30A	R30	28×34.2	10
WLK-RGF-38A	R38	36×42.3	10
WLK-RGF-48A	R48	48×54.0	10
WLK-RGF-57A	R57	56×67.2	5
WLK-RGF-70A	R70	70×80.0	5

工业机器人六轴网球拍

Industrial robot flange connector

品牌：蓝江/Winlink

材料：钣金喷塑

颜色：黑色

性能：机器人六轴连接法兰盘，可随机器人运动而转动，实现软管与前端完美连接

应用：工业机器人，协作机器人




Brand: Land/Winlink

Material: Sheet metal spray coating

Color: Black

Performance: Matching friction ball, fixed bracket
integrated with ball matching front end fixed bracket

Applications: Industrial robots, collaborative robots

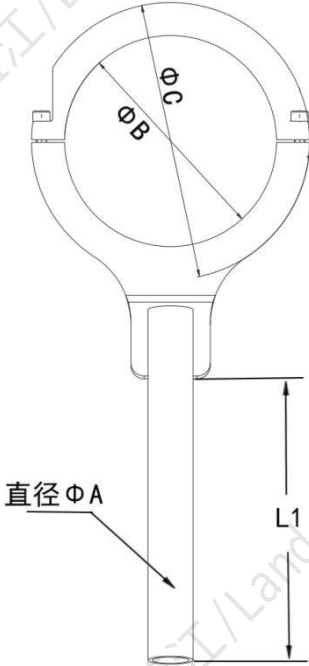

产品选型参数表

蓝江产品型号	手柄直径	法兰圈内径	法兰圈外径	手柄长度
Product model	diameter	inside	outside	length
PN.	Φ A mm	Φ B mm	Φ C mm	L1 mm
WLK-RGWQP-125	27	125	170	160
WLK-RGWQP-140	34	140	190	200
WLK-RGWQP-160	34	160	210	200
WLK-RGWQP-180	34	180	210	200
WLK-RGWQP-190	34	190	250	220
WLK-RGWQP-200	34	200	250	220
WLK-RGWQP-220	34	220	270	220

本款产品可根据机器人型号进行定制

协作机器人六轴网球拍

Collaborate robot flange connector

品牌：蓝江/Winlink

材料：钣金喷塑

颜色：黑色

性能：协作机器人六轴连接法兰盘，可随机器人运动而转动，实现软管与前端完美连接

应用：工业机器人，协作机器人




Brand: Land/Winlink

Material: Sheet metal spray coating

Color: Black

Performance: Matching friction ball, fixed bracket
integrated with ball matching front end fixed bracket

Applications: Industrial robots, collaborative robots

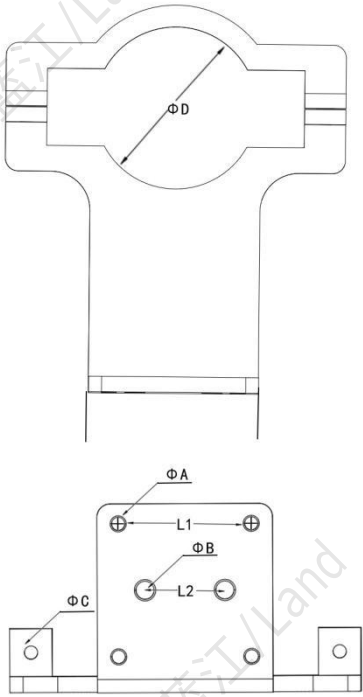

产品选型参数表

蓝江产品型号	孔距		直径			
Product model	L1	L2	Φ A	Φ B	Φ C	Φ D
PN.	mm	mm	mm	mm	mm	mm
WLK-RGWQP-50	50	30	M6	M8	M6	50
WLK-RGWQP-63	50	30	M6	M8	M6	63

本款协作机器人六轴网球拍可以根据机器人型号定制

六轴固定块连接器

Six axis fixed connector


品牌：蓝江/Winlink

材料：铝制喷塑

颜色：黑色

性能：一端连接六轴网球拍，一端连接前端固定支架，集成为管线包前端系统

应用：工业机器人，协作机器人

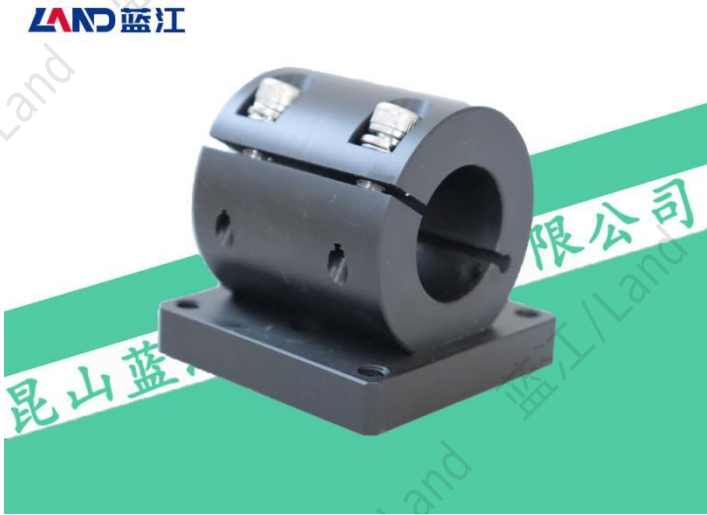




Brand: Land/Winlink

Material: Aluminum spray coating

Color: Black

Performance: One end is connected to a six axis tennis racket, and the other end is connected to a front fixed bracket, integrated into a pipeline package front-end system

Applications: Industrial robots, collaborative robots

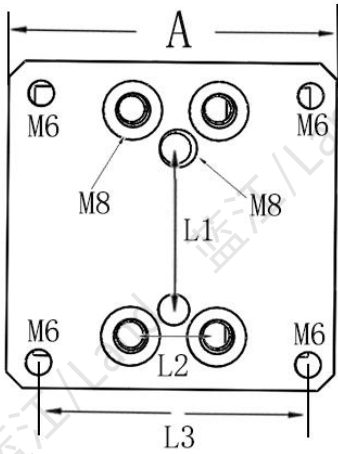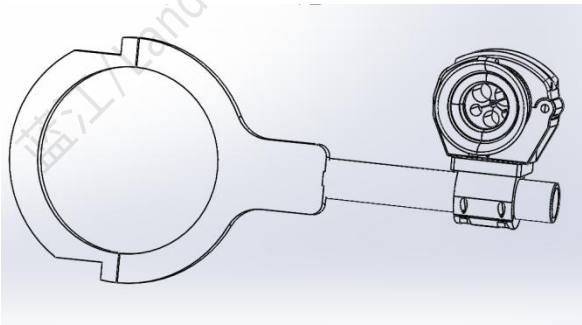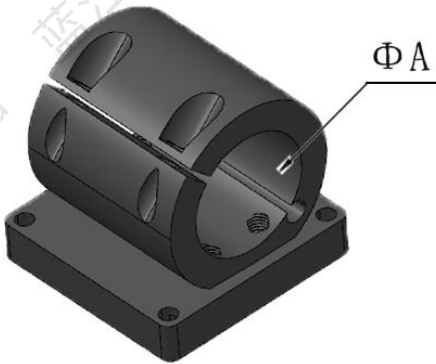

产品选型参数表

蓝江产品型号	孔距		直径	
Product model	L1	L3	Φ A	A
PN.	mm	mm	mm	mm
WLK-RGDK-27	30	50	27	8
WLK-RGDK-34	30	50	34	8

万向旋转盘

Rotating universal base

品牌：蓝江/Winlink

材料：铝制喷塑

颜色：黑色

性能：铝喷塑，耐腐蚀，刚性强，轻量化

应用：工业机器人，协作机器人





Brand: Land/Winlink

Material: Aluminum spray coating

Color: Black

Performance: Aluminum spray coating, corrosion-resistant, strong rigidity, lightweight

Applications: Industrial robots, collaborative robot

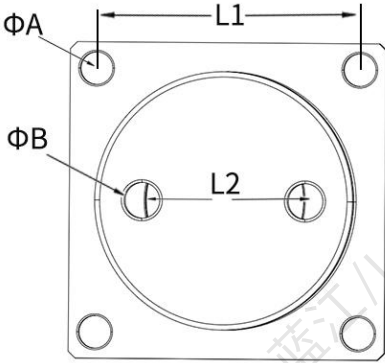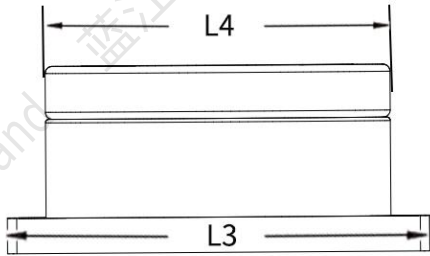

产品选型参数表

蓝江产品型号	孔距		直径		内径	
Product model	L1	L2	L3	L4	Φ A	Φ B
PN.	mm	mm	mm	mm	mm	mm
WLK-RGMX-T60	50	30	60	49	6	M8

三轴伸缩弹簧

Three axis telescopic spring


品牌：蓝江/Winlink

材料：硅锰弹簧钢/60Si2Mn

性能：硅锰弹簧钢制成，拉伸回弹效果好，

可长时间保持伸缩状态

应用：工业机器人，协作机器人

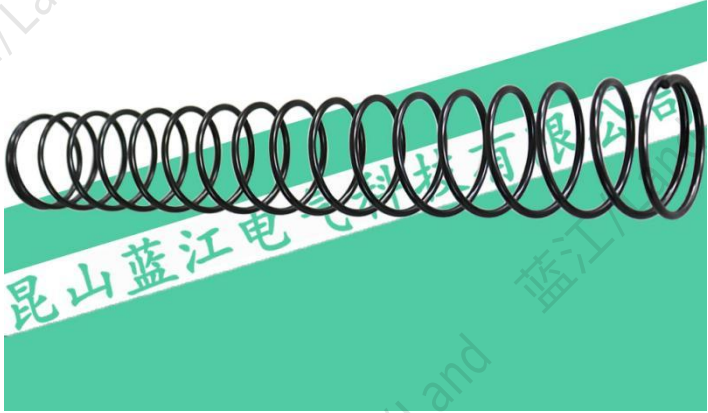


Brand: Land/Winlink

Material: 60Si2Mn

Performance: Made of silicon manganese spring steel, it has good tensile rebound effect and can maintain a stretched state for a long time

Applications: Industrial robots, collaborative robots et

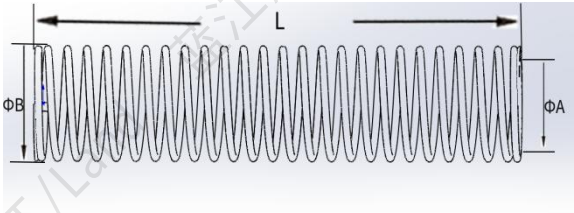

产品选型参数表

蓝江产品型号	内径	外径	总长度	厚度	伸缩量
Product model	inside diameter	outside diameter	length	thickness	Expansion
PN.	Φ A mm	Φ B mm	Φ C mm	mm	mm
WLK-RGSC-36	52	59	400	4	300
WLK-RGSC-48	66	75	500	5	350
WLK-RGSC-70	90	100	800	6	400

导轨弹簧伸缩盒

Rail spring telescopic box


品牌：蓝江/Winlink

材料：钣金喷漆

颜色：黑色，蓝色

性能：一体压铸成型，内置导轨及弹簧，伸缩回弹性能优越，配套威联科固定支架集成三轴伸缩系统，广泛应用于各种型号机器人

应用：工业机器人，协作机器人

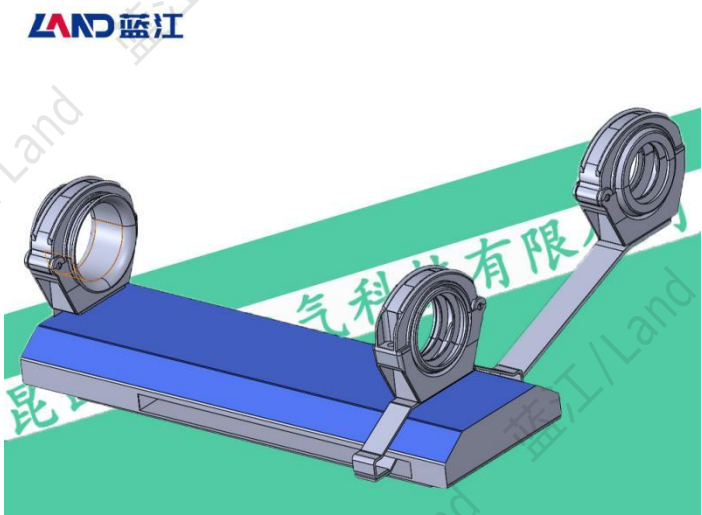

Brand: Land/Winlink

Material: Sheet metal painting

Color: Black, Blue

Performance: Superior telescopic rebound performance, equipped with Winlink fixed bracket integrated three-axis telescopic system

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	适配软管	安装孔距	包装
Product model	Adapted hose	hole spacing	package
PN.	Φ mm	mm	pcs
WLK-RGDG-36A	36×42.3	30	1
WLK-RGDG-48A	48×54.0	30	1
WLK-RGDG-56A	56×67.2	30	1
WLK-RGDG-70A	70×80.0	30	1

建议标配：导轨盒*1，导向支架*1，配球支架*2，延长钣金*1

U型弹簧伸缩盒

U-shaped spring telescopic box


品牌：蓝江/Winlink

材料：改性尼龙

颜色：黑色，灰色

性能：改性尼龙制成，内置限位球及弹簧，伸缩回弹性能优越，广泛应用于各种型号机器人

应用：工业机器人，协作机器人

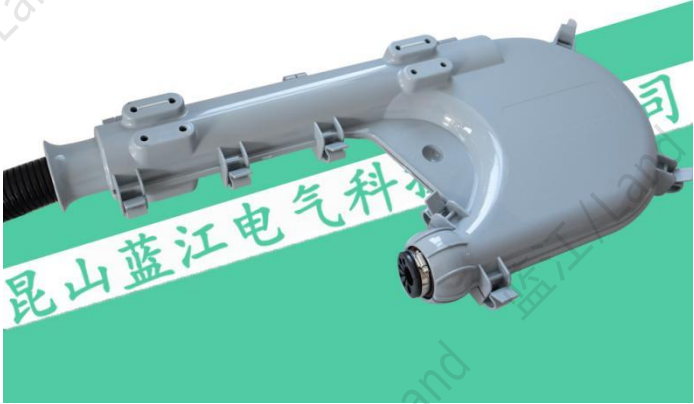

Brand: Land/Winlink

Material: Modified Nylon

Color: Black, Grey

Performance: Built in limit ball and spring, with superior telescopic rebound performance

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	适配软管	安装结构	包装
Product model	Adapted hose		package
PN.	Φ mm	structure	pcs
WLK-RGLH-36A	36×42.3	一体式	1
WLK-RGLH-48A	48×54.0	一体式	1
WLK-RGLH-70A	70×80.0	一体式	1
WLK-RGLH-36B	36×42.3	分体式	1
WLK-RGLH-48B	48×54.0	分体式	1
WLK-RGLH-70B	70×80.0	分体式	1

建议标配：A型（U型盒体*1，弹簧*1，限位球*1，固定球*1）
B型（U型盒体*1，弹簧*1，限位球*1，固定球*1，分线器*1）

钣金弹簧伸缩盒

Sheet metal spring expansion box



品牌：蓝江/Winlink

材料：钣金喷漆

颜色：黑色

性能：优质钣金制成，内置限位球及弹簧，伸缩回弹性能优越，广泛应用于各种型号机器人

应用：工业机器人，协作机器人



Brand: Land/Winlink

Material: Sheet metal painting

Color: Black

Performance: Made of high-quality sheet metal, with built-in limit balls and springs, superior stretchability and rebound performance

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	适配软管	安装结构	包装
Product model	Adapted hose	mounting structure	package
PN.	Φ mm	/	pcs
WLK-RGTH-36A	36×42.3	组装式	1
WLK-RGTH-48A	48×54.0	组装式	1
WLK-RGTH-70A	70×80.0	组装式	1


建议标配：定制大钣金*1，罩盖钣金*1，延长钣金*1，弹簧*1，限位球*1，导向支架*2，配球支架*1

焊接机器人包线布

Welding robot conduit



- 品牌：蓝江/Winlink
- 材料：凯拉夫纤维，魔术贴
- 颜色：浅灰色
- 性能：防飞溅，阻燃，耐磨，防水，耐高温
- 应用：工业机器人，协作机器人

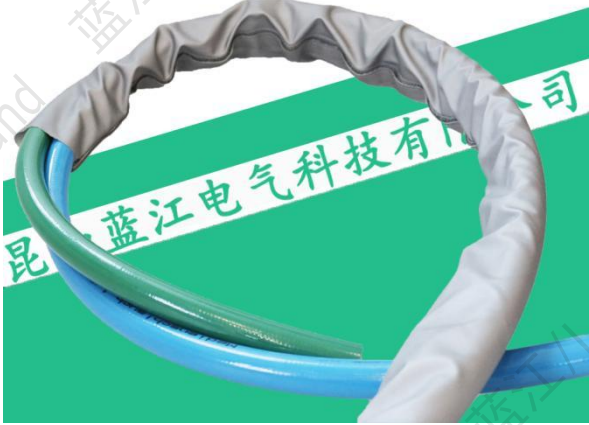

- Brand: Land/Winlink
- Material:Kailaf fiber, Velcro
- Color: Light Grey
- Performance: Splash proof, flame retardant, wear-resistant, waterproof, high temperature resistant
- Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	布展宽度	直径	整盒长度
Product model	width	diameter	length
PN.	Φ mm	Φ mm	米/M
WLK-RGNW-15G	75	15	25M
WLK-RGNW-20G	84	20	25M
WLK-RGNW-25G	100	25	25M
WLK-RGNW-30G	115	30	25M
WLK-RGNW-40G	147	40	25M
WLK-RGNW-50G	183	50	25M
WLK-RGNW-60G	220	60	25M
WLK-RGNW-70G	246	70	25M
WLK-RGNW-100G	340	100	25M

阻燃机器人包线布

Fireproof robot conduit



品牌：蓝江/Winlink

材料：尼龙/PVC

颜色：黑色

性能：阻燃，防水，耐磨，耐温，牢固

应用：工业机器人，协作机器人



Brand: Land/Winlink

Material: Nylon/PVC

Color: Black

Performance: Flame retardant, waterproof, wear-resistant, temperature resistant, and sturdy

Applications: Industrial robots, collaborative robots et

产品选型参数表

蓝江产品型号	内径	适用内径	布展宽度	厚度	整盒长度
Product model	within Φ	In use Φ	width	thickness	box length
PN.	mm	mm	Φ mm	mm	米/M
WLK-RGNT-15B	15	14-15	75	0.7	50M
WLK-RGNT-20B	20	17-20	90	0.7	50M
WLK-RGNT-25B	25	21-25	105	0.7	50M
WLK-RGNT-30B	30	26-30	120	0.7	50M
WLK-RGNT-35B	35	31-35	140	0.7	50M
WLK-RGNT-40B	40	36-40	155	0.7	50M
WLK-RGNT-50B	50	41-50	185	0.7	50M
WLK-RGNT-60B	60	51-60	220	0.7	50M
WLK-RGNT-70B	70	61-70	245	0.7	50M
WLK-RGNT-80B	80	71-80	280	0.7	50M
WLK-RGNT-90B	90	81-90	310	0.7	50M
WLK-RGNT-100B	100	91-100	345	0.7	50M

扣式机器人包线布

Button style robot conduit



品牌：蓝江/Winlink

材料：尼龙/PVC

颜色：黑色

性能：阻燃，防水，耐磨，耐温，牢固

应用：工业机器人，协作机器人



Brand: Land/Winlink

Material: Nylon/PVC

Color: Black

Performance: Flame retardant, waterproof, wear-resistant, temperature resistant, and sturdy

Applications: Industrial robots, collaborative robots

产品选型参数表

蓝江产品型号	宽度	束径	整盒长度
Product model	width	In use ϕ	box length
PN.	mm	mm	米/M
WLK-RGNK-10B	57	10	50M
WLK-RGNK-15B	75	15	50M
WLK-RGNK-20B	90	20	50M
WLK-RGNK-25B	100	25	50M
WLK-RGNK-30B	115	30	50M
WLK-RGNK-40B	146	40	50M
WLK-RGNK-50B	175	50	50M
WLK-RGNK-70B	241	70	50M
WLK-RGNK-100B	333	100	50M